

Stopper cylinders STAF

FESTO




Key features

At a glance

- Single-acting or double-acting
- Fast and simple set-up of conveyor lines
- Workpiece carriers, pallets and packages weighing up to 150 kg can be safely stopped
- Simple actuation via valve terminal (e.g. together with other cylinders at one assembly site)
- Flange-mounted solenoid valve permits fast actuation even at great distances and with individual stopper cylinders
- Space-saving sensing via integrated proximity switches


Mounting options

Flange mounting




Applications

For heavy loads




Safety



Thanks to the spring return of the piston rod in case of pressure failure

Functional sequence

Functional sequence

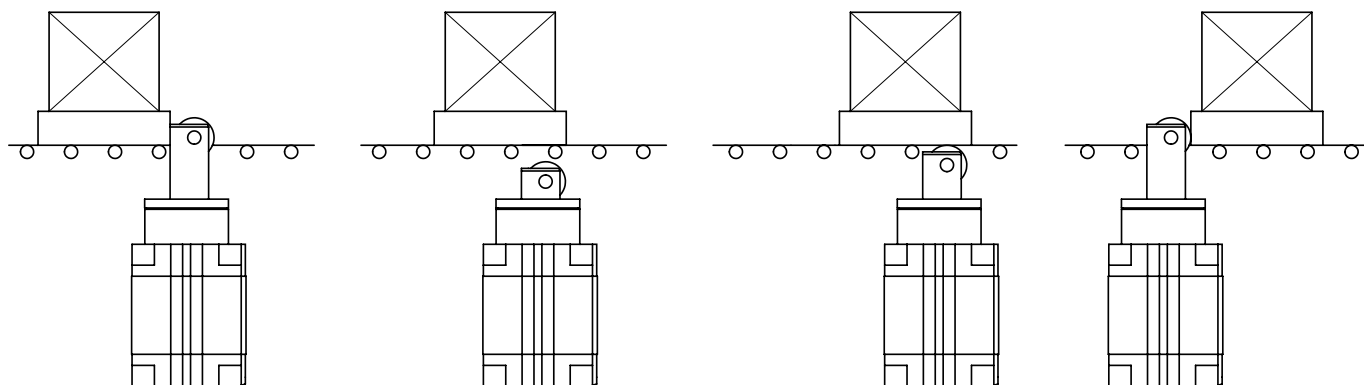


1. Sudden braking of the workpiece carrier via the piston rod.
2. The workpiece carrier is released by actuating the cylinder.
3. The cylinder is then advanced by spring force or compressed air until the roller makes contact with the workpiece carrier. The workpiece carrier continues to move forward.
4. After the workpiece carrier has passed, the cylinder advances to its end position. The next workpiece carrier can then be stopped.

Type codes

001	Series	
STAF	Stopper cylinder with flange mounting, single-or double-acting	
002	Piston diameter	
80	80	
003	Stroke	
...	30 ... 40	


004	Cushioning	
P	Elastic cushioning rings/plates on both sides	
005	Position sensing	
A	For proximity sensor	
006	Version	
R	Roller version	

Peripherals overview

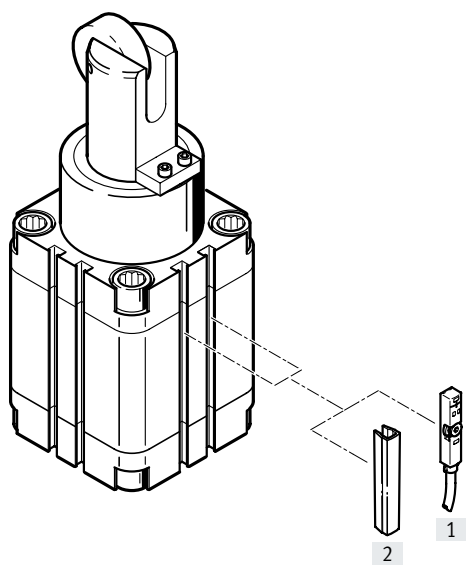

Accessories		Description	→ Page/Internet
[1]	Proximity switch SME/SMT-8	Can be integrated in the cylinder profile barrel	12
[2]	Slot cover ABP	For protection against contamination	12

Datasheet



- - Diameter
80 mm
- - Stroke length
30, 40 mm
- - www.festo.com

- **Note**
Contact with liquids should be avoided during operation.



General technical data	
Pneumatic connection	G1/8
Stroke [mm]	30, 40
Piston rod ø [mm]	50
Operating pressure [bar]	1 ... 10
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Design	Piston cylinder with spring return
Cushioning	Elastic cushioning rings/plates at both ends
Position sensing	Via proximity switch
Type of mounting	With through-hole With female thread
Mounting position	Any
Mode of operation	Single- or double-acting
Protection against rotation	Flat-sided piston rod
Ambient temperature ¹⁾ [°C]	0 ... +60
Product weight [g]	4630, 4850


1) Note operating range of proximity switches

- **Note**
This product conforms to ISO 1179-1 and ISO 228-1.

Forces [N]		
Piston ø	80	
Stroke	30	40
Permissible impact force on the advanced piston rod	14600	13300
Spring torque	79 ... 115	101 ... 170

The impact force refers here to the maximum of a force-time curve with unknown details during impact/braking of the moving mass. It acts perpendicularly to the direction of motion of the piston rod. By treating the elastic components as linear springs, the permissible impact force can be used to calculate the permissible impact energy so that the right stopper can be selected.

The stopper must not be switched below this force. Depending on the type of load to be stopped, it is a good idea to provide an elastic buffer to cushion the impact, reduce the noise and optimise the impact energy.




→ = direction of the impact force

Datasheet

Permissible load m as a function of conveyor speed v


The values in the graph on the right are based on a workpiece carrier that is fitted with an elastic buffer with deformation of 1 mm.

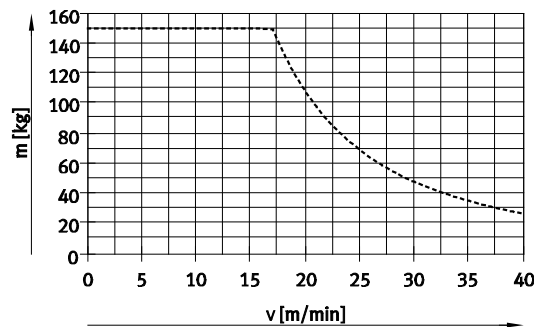

..... STAF-80-...-P-A-R

Permissible lateral force F_Q during the switching operation as a function of pressure p

The "permissible lateral force during switching operation" refers here to the force which is still applied perpendicularly to the direction of movement of the piston rod even after the end of the impact or braking process, e.g. as a result of belts that are still running or the downhill force of a steep raceway. The force acts statically. The stopper can be switched below this force. A certain minimum pressure must be applied in order to guarantee the cylinder function.

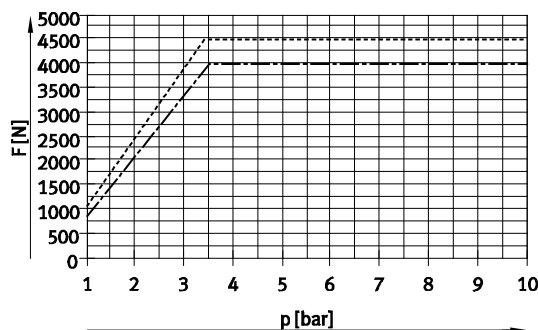

..... STAF-80-30-P-A-R


- . - . - STAF-80-40-P-A-R

-  - **Note**

Selection aid → Page 9

Materials

Sectional view

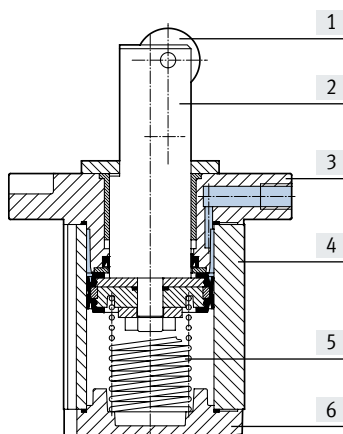


Stopper cylinder		
[1]	Roller	Steel
[2]	Piston rod	Stainless steel
[3]	Flange	Die-cast aluminium
[4]	Cylinder barrel	Anodised aluminium
[5]	Springs	Spring steel
[6]	Cover	Anodised aluminium
-	Seals	NBR

Datasheet

Dimensions

Download CAD data → www.festo.com

Flange mounting

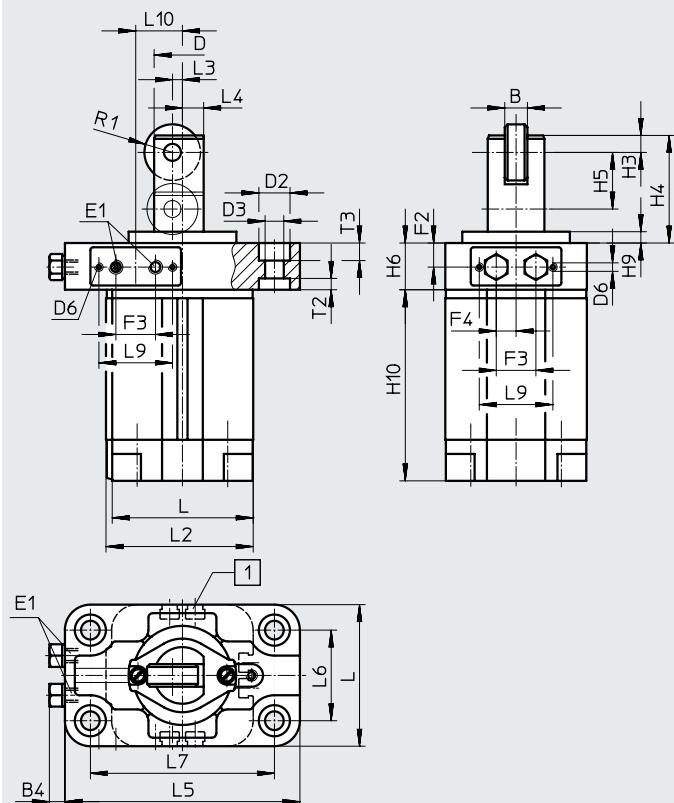

[1] Sensor slot for proximity switch SME/SMT-8

∅	Stroke	B	B4	D	D2	D3	D6	E1	F2	F3	F4	H3	H4	H5	H6
[mm]	[mm]			∅	∅	∅									
80	30	18	4.5	50	18	11	M4	G1/8	11	17	4.5	10	63	30	22
	40												73	40	

∅	Stroke	H9	H10	L	L2	L3	L4	L5	L6	L7	L9	L10	R1	T2	T3
[mm]	[mm]														
80	30	8	119	107	111	11	18	160	63	135	36	18.5	18	6	6
	40		129												

-  - **Note**

This product conforms to ISO 1179-1 and ISO 228-1.

Ordering data


Stopper cylinder STAF			
Piston ∅	Stroke	Part no.	Type
[mm]	[mm]		
80	30	164886	STAF-80-30-P-A-R
	40	164894	STAF-80-40-P-A-R

Datasheet

Selection aid

Stopping a pallet

The stopper cylinder is used to brake an individual pallet.



Example

Where:

Friction factor $\mu = 0.1$

Conveyor speed $v = 10 \text{ m/min}$


Pallet with workpiece $m = 40 \text{ kg}$

Operating pressure $p = 6 \text{ bar}$

Selection: stopper cylinder STAF-80-30-P-A-R

1. Checking the permissible load

The maximum permissible load at a conveyor speed of 10 m/min is 150 kg. This means that a total load of 40 kg for the pallet and the workpiece is permissible.

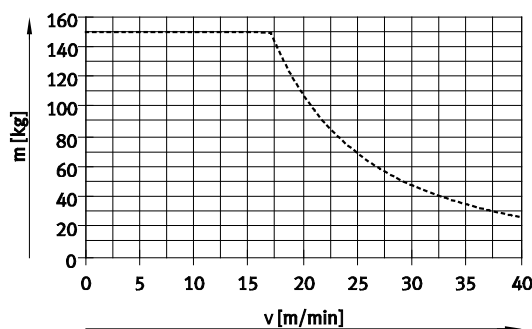

..... STAF-80-...-P-A-R


2. Checking the permissible lateral force during the switching operation

Lateral force $F_Q = \text{friction force } F_{\text{friction}}$

$$\begin{aligned}
 F_{\text{friction}} &= \mu \times m \times g \\
 &= 0.1 \times 40 \text{ kg} \times 9.81 \text{ m/s}^2 \\
 &= \text{approx. } 40 \text{ N}
 \end{aligned}$$

The maximum permissible lateral force at an operating pressure of 6 bar is 4500 N.

This means that a lateral force of 40 N is permissible.

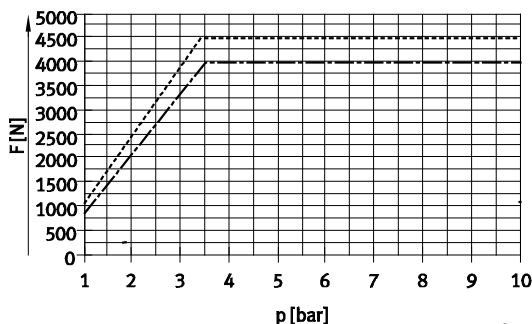


..... STAF-80-30-P-A-R
 - - - - - STAF-80-40-P-A-R

Datasheet

Selection aid

Stopping or separating several pallets

The stopper cylinder is used to separate pallets. Further pallets accumulate behind the pallets already resting against the stopper cylinder. It is therefore vital that a buffer is mounted between the pallets (e.g. elastomer components).

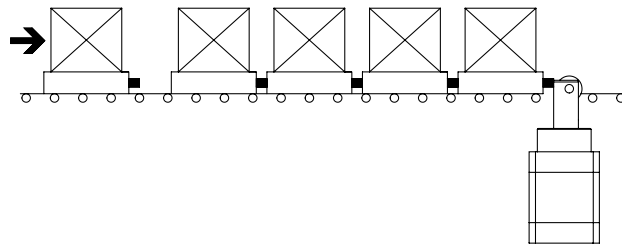

Example

Where:

Friction factor $\mu = 0.1$

Conveyor speed $v = 10 \text{ m/min}$

Pallet with workpiece $m = 40 \text{ kg}$

Operating pressure $p = 6 \text{ bar}$

Maximum number of pallets accumulating simultaneously $n_{\text{group}} = 1$

Maximum number of all queued pallets $n_{\text{queue}} = 5$


Maximum number of all advancing pallets $n_{\text{queue-1}} = 4$

Spring travel of the pallet buffer $s_F = 1 \text{ mm}$

Selection: stopper cylinder STAF-80-30-P-A-R

1. Checking the permissible load of the first pallet

The maximum permissible load at a conveyor speed of 10 m/min is 150 kg . This means that a total load of 40 kg for the pallet and the workpiece is permissible.

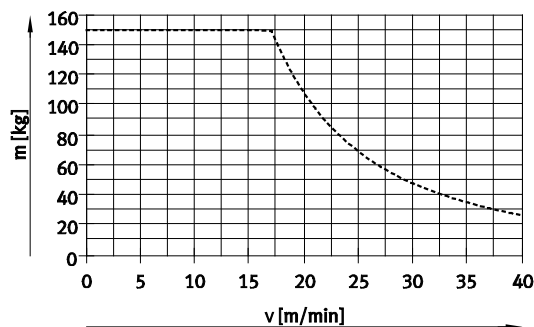

..... STAF-80-...-P-A-R

2a. Calculation of the maximum permissible impact force when pallets collide with a pallet resting against the stopper cylinder

For STAF-80, the maximum permissible impact force is 14600 N .

This means that with a total force of 1300 N , the number of pallets is permissible.

Impact force calculation:

$$F_{\text{Stoß}} = \frac{(n_{\text{Gruppe}} \cdot m) \cdot v^2}{s_F} = \frac{(1 \cdot 40 \text{ kg}) \cdot \left(10 \frac{\text{m}}{60 \text{ s}}\right)^2}{0,001 \text{ m}} = \text{ca. } 1100 \text{ N}$$

Friction force:

$$F_{\text{Reib}} = \mu \cdot (n_{\text{Ansteh}} \cdot m) \cdot g = 0,1 \cdot (5 \cdot 40 \text{ kg}) \cdot 9,81 \frac{\text{m}}{\text{s}^2} = \text{ca. } 200 \text{ N}$$

Max. total force:

$$F_{\text{ges}} = F_{\text{Stoß}} + F_{\text{Reib}} = 1100 \text{ N} + 200 \text{ N} = 1300 \text{ N}$$

Datasheet


Selection aid

2b. Checking the permissible lateral force during the switching operation

Lateral force $F_Q =$ friction force F_{friction}
 $F_{\text{friction}} = 200 \text{ N}$


The maximum permissible lateral force at an operating pressure of 6 bar is 4500 N.

This means that the lateral force of 200 N is permissible.

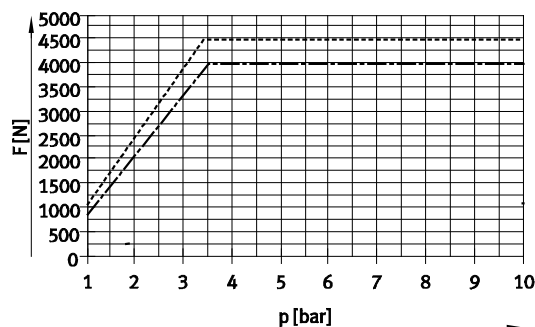


..... STAF-80-30-P-A-R
 - . - . - STAF-80-40-P-A-R

3. Separating and advancing the pallets

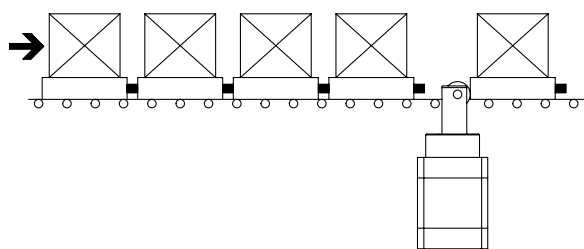

For the STAF-80-30-P-A-R, the maximum permissible load at a conveyor speed of 10 m/min is 150 kg.
 The total mass of the 4 pallets advancing on the stopper cylinder is 160 kg.

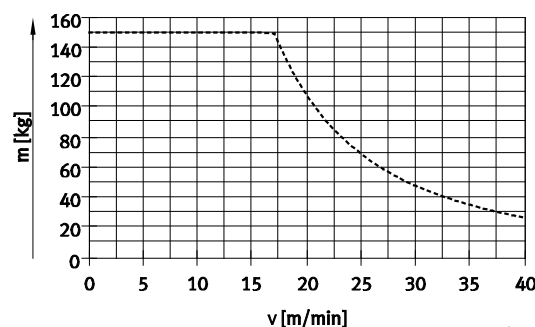

..... STAF-80-...-P-A-R

Max. total mass:

$$m_{\text{Ges}} = n_{\text{Ansteh-1}} \cdot m = 4 \cdot 40 \text{ kg} = 160 \text{ kg}$$

Results

When using the stopper cylinder STAF-80-30-P-A-R, max. 2 advancing pallets may accumulate simultaneously.

Max. total mass:

$$m_{\text{Ges}} = n_{\text{Ansteh-1}} \cdot m = 2 \cdot 40 \text{ kg} = 80 \text{ kg}$$

Accessories

Ordering data – Proximity switch for T-slot, magneto-resistive

Datasheets → Internet: smt


Ordering data	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type
N/O						
	Inserted in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-core	2.5	574335	SMT-8M-A-PS-24V-E-2.5-OE
			Plug M8x1, 3-pin	0.3	574334	SMT-8M-A-PS-24V-E-0.3-M8D
			Plug M12x1, 3-pin	0.3	574337	SMT-8M-A-PS-24V-E-0.3-M12
		NPN	Cable, 3-core	2.5	574338	SMT-8M-A-NS-24V-E-2.5-OE
			Plug M8x1, 3-pin	0.3	574339	SMT-8M-A-NS-24V-E-0.3-M8D
N/C						
	Inserted in the slot from above, flush with the cylinder profile, short design	PNP	Cable, 3-core	7.5	574340	SMT-8M-A-PO-24V-E-7.5-OE

Ordering data – Proximity switches for T-slot, magnetic reed


Datasheets → Internet: sme

Ordering data	Proximity switches for T-slot, magnetic reed	Type of mounting	Switching output	Electrical connection	Cable length [m]	Part no.	Type
N/O							
	Inserted in the slot from above, flush with the cylinder profile	Contacting	Cable, 3-core	2.5	543862	SME-8M-DS-24V-K-2.5-OE	
				5.0	543863	SME-8M-DS-24V-K-5.0-OE	
			Cable, 2-core	2.5	543872	SME-8M-ZS-24V-K-2.5-OE	
			Plug M8x1, 3-pin	0.3	543861	SME-8M-DS-24V-K-0.3-M8D	
	Inserted in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-core	2.5	150855	SME-8-K-LED-24	
			Plug M8x1, 3-pin	0.3	150857	SME-8-S-LED-24	
N/C							
	Inserted in the slot lengthwise, flush with the cylinder profile	Contacting	Cable, 3-core	7.5	160251	SME-8-O-K-LED-24	

Connecting cables NEBA, straight

	Electrical connection 1, connection technology	Electrical connection 2, connection technology	Electrical connection 2, number of pins/cores	Cable length [m]	Part no.	Type
	M8x1 A-coded to EN 61076-2-104	Open end	3	2.5	8078223	NEBA-M8G3-U-2.5-N-LE3
				5	8078224	NEBA-M8G3-U-5-N-LE3

Connecting cables NEBA, angled

	Electrical connection 1, connection technology	Electrical connection 2, connection technology	Electrical connection 2, number of pins/cores	Cable length [m]	Part no.	Type
	M8x1 A-coded to EN 61076-2-104	Open end	3	2.5	8078230	NEBA-M8W3-U-2.5-N-LE3
				5	8078231	NEBA-M8W3-U-5-N-LE3

Ordering data – Slot cover for T-slot

	Assembly	Length [m]	Part no.	Type
	Insertable	2x 0.5	151680	ABP-5-S