
Valve terminal MPA-S





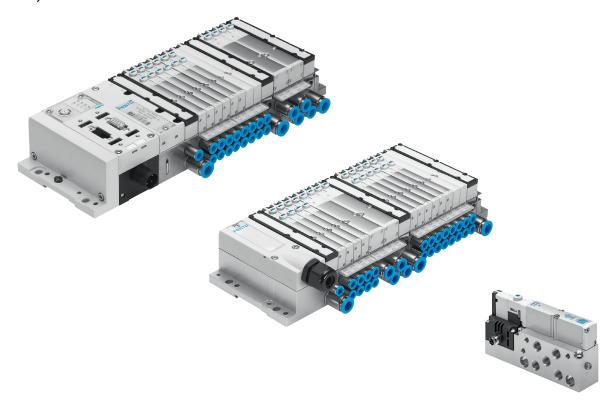

Innovative

- Flat, high-performance valves in sturdy metal housing
- MPA1: flow rates up to 360 l/min
- MPA14: flow rates up to 670 l/min
- MPA2: flow rates up to 850 l/min
- Standardised from the individual valve to the valve terminal with multi-pin plug, AS-Interface, CPI and fieldbus connection and control block
- Dream team: fieldbus valve terminal suitable for electrical peripherals CPX. This means:
 - Forward-looking internal communication system for actuating the valves and CPX modules
 - Diagnostics down to the individual valve
 - Valves can be actuated with or without (standard) separate electrical circuits
 - Also available as interface for CPX-AP-A

Versatile


- Modular system offering a range of configuration options
- Expandable with up to 128 solenoid coils
- Conversions and extensions possible at a later date
- Further sub-bases can be expanded using just three screws, sturdy separating seals on metal separator plates
- Possible to integrate innovative function modules
- Manual regulators, rotatable pressure gauges
- Proportional pressure regulator
- Air supply can be extended via additional pressure zones with supply plates
- Wide range of pressures
 -0.09 ... 1 MPa
- Wide range of valve functions
- Safety function with switchable pilot air

Reliable

- Sturdy and durable metal components
 - Valves
 - Sub-bases
 - Seals
- Fast troubleshooting with LEDs on the valves and diagnostics via fieldbus
- Extensive operating voltage range ±25%
- Easy to service thanks to replaceable valves and electronic modules
- Manual override either nondetenting, detenting or protected against unauthorised activation (concealed)
- Durable thanks to tried-andtested piston spool valves
- Large and durable labelling system, suitable for barcodes

Easy to install

- Ready-to-install and tested unit
- Reduced selection, ordering, installation and commissioning costs
- Solid wall mounting or DIN rail mounting

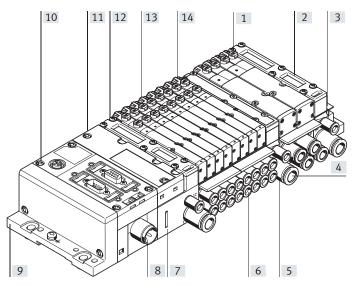

- [1] Safe operation:

 Manual override, nondetenting/detenting or
 concealed
- [2] Space-saving: Flat valves and flat plate silencer
- [3] Flexible:
 64 valve positions/128
 solenoid coils (fieldbus
 control)
 24 valve positions/24
 solenoid coils (multi-pin
 control)
- [4] Practical: Sturdy metal thread or preassembled push-in fittings
- [5] Modular: Supply plates for creating pressure zones as well as numerous additional exhaust and supply ports
- [6] Wide range of valve functions

- [7] Convenient: large inscription labels
- [8] Reliable: Operating voltage range ±25%, outputs and valves can each be switched off separately
- [9] Quick to mount: Directly using screws or on a DIN rail, automatic earthing
- [10] CPX diagnostic interface for handheld devices (channeloriented diagnostics down to the individual valve)
- [11] Straightforward electrical connection

 Multi-pin connection, fieldbus interface

 Control block, AS-Interface,
- [12] Pneumatic interface to CPX or CPX-AP-A
- [13] Width 10 mm, 14 mm and 20 mm
- [14] Reduced downtimes: twocolour on-site LED diagnostics

Equipment options

Valve functions

- 5/2-way valve, single solenoid
- 5/2-way valve, double solenoid
- 2x 3/2-way valve, normally open
- 2x 3/2-way valve, normally closed
- 2x 3/2-way valve,
 1x normally open,
 1x normally closed
- 5/3-way valve mid-position pressurised
- 5/3-way valve mid-position closed
- 5/3-way valve mid-position exhausted
- 2x2/2-way valve
 1x normally closed
 1x normally closed, reversible
- 2x 2/2-way valve normally closed
- 1x 3/2-way valve normally closed external compressed air supply
- 1x 3/2-way valve, normally open, external compressed air supply

 Proportional pressure regulators (for CPI connection, fieldbus)

All valves have the same compact dimensions with an overall length of 107 mm and a width of 10 mm, 14 mm or 20 mm.

A height of 55 mm makes them a perfect match for the electrical peripherals CPX.

Special features

Multi-pin terminal

- Max. 24 valve positions/max.
 24 solenoid coils
- Parallel, modular valve links via circuit boards
- Electronics module with integrated holding current reduction
- Any compressed air supply
- Creating pressure zones

Fieldbus terminal/control block

- Max. 64 valve positions/ max. 128 solenoid coils
- Internal CPX bus system for valve actuation
- Module for electrical valve actuation with or without separate electrical circuits
- Any compressed air supply
- Creating pressure zones

Individual valve

- Electrical M8 connection, 4-pin with screw connection
- Detachable electronics module with integrated holding current reduction

AS-Interface

 2 to 8 valves, freely configurable (max. 8 solenoid coils) with input feedback.


CPI interface

 Max. 32 valve positions/ max. 32 solenoid coils

Combinable

- MPA1: flow rates up to 360 l/min
- MPA14: flow rates up to 670 l/min
- MPA2: flow rates up to 850 l/min
- MPA1, MPA14 and MPA2 can be combined on one valve terminal

Electrical supply plate



- Increases the maximum number of valve positions possible to 64, with max. 128 solenoid coils
- Creation of separate, individually disconnectable circuits (voltage zones)
- Greater economic efficiency thanks to more valves/solenoid coils per valve terminal
- Increased safety as valve groups can be individually disconnected, e.g. for emergency-off functions

-

Note

The electrical supply plate is optionally available with M18 or 7/8" connection.

Ordering data - Product options



Configurable product This product and all its product options can be ordered using the configurator. The configurator can be found at → www.festo.com/catalogue/...
Enter the part number or the type.

Part no. Type 197330 CPX CPX-AP-A 8079933 MPA-ASI-VI 546279 MPA-CPI-VI 546280 530411 MPA-FB-VI 550808 MPA-FB-AP-VI MPA-MPM-VI 539105

Individual connection




Valves on individual sub-bases can also be used for actuators further away from the valve terminal. The electrical connection is established using a standard 4-pin M8 plug (EN 60947-5-2).

More information

→ VMPA1

Multi-pin plug connection




The signals are transmitted from the controller to the valve terminal via a pre-assembled or self-assembled multi-core cable to the multi-pin plug connection. This substantially reduces installation time.

The valve terminal can be equipped with max. 24 solenoid coils. This corresponds to 4 to 24 MPA1 or 4 to 24 MPA14 or 2 to 24 MPA2 valves, or a combination of all of these.

Variants

- Sub-D connection
- Pre-assembled multi-pin cable
- Multi-pin cable for selfassembly

AS-Interface connection



A special feature of the AS-Interface is the simultaneous transmission of data and supply power via a two-core cable. The encoded cable profile prevents connection with incorrect polarity. The valve terminal with AS-Interface is available in the following versions:


- With two to eight modular valve positions (max. 8 solenoid coils). This corresponds to 2 to 8 MPA1, 2 to 8 MPA14 or 2 to 8 MPA2 valves, or a combination of all of these.
- With all available valve functions.

The connection technology used for the inputs can be selected as with CPX: M8, M12, Sub-D, Cage Clamp (terminals to IP20).

More information

→ Internet: as-interface

Installation system CPI

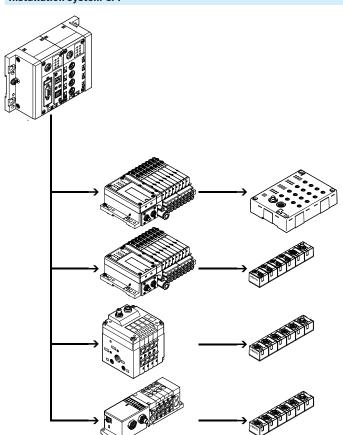

Valve terminal for installation system CPI:

The valve terminal with CP connection is provided for connection to a higher-order bus node or to control blocks. A bus node or control block additionally enables the connection of decentralised input/output units. The following bus protocols are supported:


- PROFIBUS DP
- DeviceNet®
- CANopen
- CC-LINK®
- EtherNet/IP
- PROFINET
- POWERLINK
 EtherCAT®
- Sercos III

Four strings with up to 32 inputs and outputs can be connected to a bus node or control block. The connecting cables transmit the power supply for the input modules and the load voltage for the valves as well as control signals.

More information

→ Internet: cpi

Fieldbus connection via the CPX system




An integrated bus node manages communication with a higherorder PLC. This enables spacesaving pneumatic and electronic solutions to be implemented. Valve terminals with fieldbus interfaces can be configured with up to 16 sub-bases. In combination with the MPA1 or MPA14 and 8 solenoid coils per sub-base, up to 128 solenoid coils can thus be controlled. An MPA2 with 4 solenoid coils per sub-base can actuate 64 solenoid coils.

Variants

- PROFIBUS DP
- DeviceNet[®]
- CANopen
- CC-LINK®
- EtherNet/IP
- PROFINET
- POWERLINK
- EtherCAT®
- Sercos III
- Front end controller, remote
- Front end controller
- Remote I/O
- Modbus/TCP
- CPX terminal
- → Internet: cpx

Control block connection via the CPX system



With controllers that are integrated in the Festo valve terminals, stand-alone control units to IP65 without control cabinets can be set up.

In the slave operating mode, these valve terminals can be used for intelligent preprocessing and are therefore ideal modules for designing decentralised intelligence. In the master operating mode, terminal groups can be designed with many options and functions that can autonomously control a medium-sized machine/system.


→ Internet: cpx



Note

Note possible restrictions for the IP protection class a ATEX declaration of conformity

Fieldbus interface from the CPX-AP-A system




VMPA-AP-EPL connects the MPA-S valve terminal to the modular remote IO system CPX-AP-A. It also fulfils the following basic functions:

- Standard functions of AP slave
- Mechanical adaptation between CPX-AP-A (left side) and MPA-S (right side)
- Integration of the MPA-S electronic modules (CBUS participants) into the AP system.
- Transmission AP OCBUS, depiction of CBUS participants as virtual AP participants
- Pneumatic supply and exhaust

Variants

- EtherNet/IP
- PROFINET
- EtherCAT®
- → Internet: cpx-ap-a

Modular pneumatic components

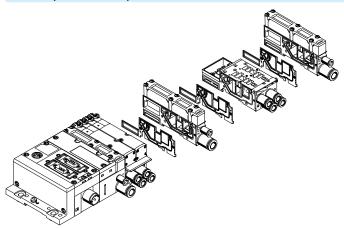

The modular design of the MPA enables outstanding flexibility right from the planning stage and offers maximum ease of service in operation. The system consists of sub-bases and valves. The sub-bases are screwed together, thus forming the support system for the valves. They contain the ducts for supplying compressed air to and exhausting from the valve terminal as well as the working ports for the pneumatic drives for

each valve. Each sub-base is connected to the next using three screws.

Individual valve terminal sections can be isolated and further blocks can be inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.

Modular electrical peripherals

The valves are actuated differently depending on whether a multi-pin terminal or fieldbus terminal is used.

The MPA with a CPX interface is based on the internal bus system of the respective CPX terminal and uses this communication system for all solenoid coils and a range of electrical input and output functions.


The valve terminal MPA-S is available with CPX interface as well as with CPX-AP-A interface.

Serial links enable the following:


- Transmission of switching information
- High valve density
- Compact design
- Diagnostics related to valve position

- Separate power supply for valves
- Flexible conversion without address shifting
- Transmission of status, parameter and diagnostic data
- → Internet: cpx, cpx-ap-a
- Option of CP interface
- CPX-CEC as stand-alone controller with access via Ethernet and web server

MPA with electrical peripherals CPX

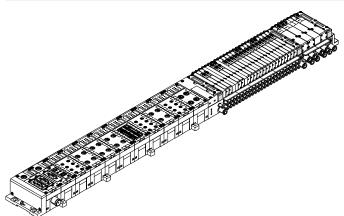

Modularity with electrical peripherals CPX

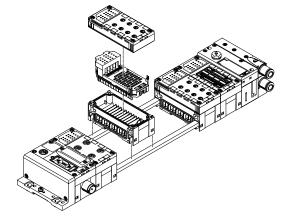


Individual sub-base

Ordering:

• Using individual part numbers

Individual sub-bases can be equipped with any valve (VMPA... of the corresponding width).

The electrical connection is established using a standard 4-pin M8 plug (EN 60947-5-2).

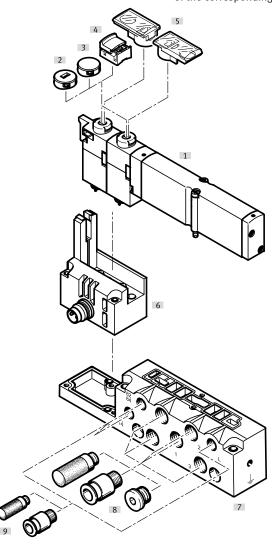


Designation		Description	→ Page/Internet
[1]	Solenoid valve	Width 10 mm, 14 mm, 20 mm	VMPA1
[2]	Cover cap, coded	After fitting the cover cap, the manual override is non-detenting only	VMPA1
[3]	Cover cap, concealed	After fitting the cover cap, the manual override is blocked	VMPA1
[4]	Cover cap, manual override detenting	After fitting the cover cap, the manual override is detenting and can be operated without tools	VMPA1
[5]	Inscription label holder	Can be pushed onto the manual override	VMPA1
[6]	Electrical connection M8	4-pin	VMPA1
[7]	Sub-base	For individual valve VMPA	VMPA1
[8]	Fittings, silencers or blanking plugs	For working ports (2, 4) and working air/exhaust ports (1, 3, 5)	VMPA1
[9] Fittings and/or silencers		For pilot air supply/pilot exhaust air (12/14, 82/84) and pressure compensation	VMPA1

Pneumatic components of the valve terminal – Multi-pin plug, AS-Interface

The sub-bases are prepared for either

- 2 or 4 single solenoid valves
- 2 or 4 double solenoid valves depending on the size.
- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves.

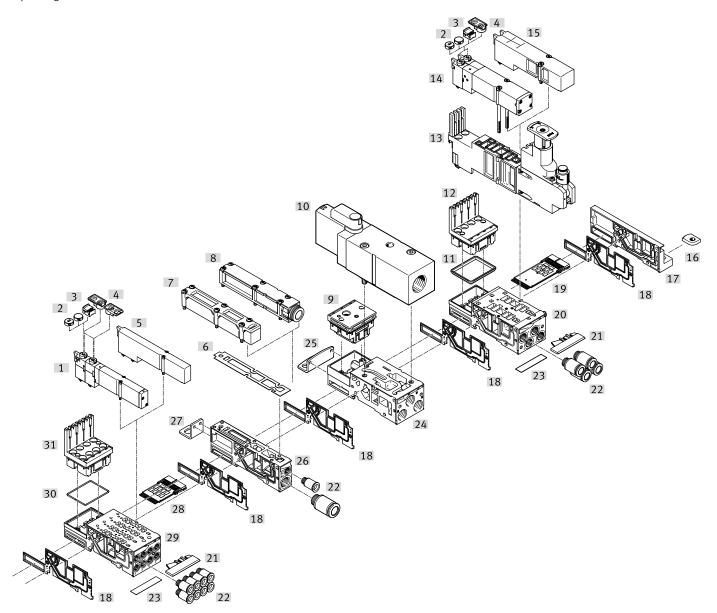

Valve terminal MPA-S


Peripherals overview

Designation		Description	→ Page/Internet	
[1]	Solenoid valve	Width 10 mm, 14 mm	91,96	
[2]	Cover cap, coded	After fitting the cover cap, the manual override is non-detenting only	106	
[3]	Cover cap, concealed	After fitting the cover cap, the manual override is blocked	106	
[4]	Cover cap, manual override detenting	After fitting the cover cap, manual override is detenting and can be operated without tools	106	
[5]	Cover plate	For unused valve position (vacant position), width 10 mm, 14 mm	91,96	
[6]	Mounting	Optional for valve terminal mounting (on supply plate)	109	
[7]	Flat plate silencer	-	_	
[8]	Exhaust air plate	For ducted exhaust air	107	
[9]	Electronics module	Electronic module for soft-start /quick exhaust valve	104	
[10]	Soft-start/exhaust valve	-	85	
[11]	Seal	-	_	
[12]	Electronics module	For connecting valves	95, 99, 103	
[13]	Regulator plate	Vertical stacking (pressure regulator, vertical pressure shut-off plate, vertical pressure supply plate)	92	
[14]	Solenoid valve	Width 20 mm	100	
[15]	Cover plate	For unused valve position (vacant position), width 20 mm	100	
[16]	DIN rail mounting	-	109	
[17]	Right end plate	-	105	
[18]	Separating seal	For sub-base	106	
[19]	Electrical interlinking module	For multi-pin plug connection, for AS-Interface, for a sub-base with pneumatic supply plate (on the left next to the sub-base), width 10 mm, 14 mm, 20 mm	95, 99, 103	
[20]	Sub-base	For two valve positions width 20 mm	102	
[21]	Inscription labels	Inscription label holder for paper foil label	102	
[22]	Fittings	For working connections, for pneumatic supply plate	108	
[23]	Paper foil label	For inscription label holder	-	
[24]	Sub-base	For soft-start/quick exhaust valve	104	
[25]	Mounting	Optional for valve terminal mounting (on supply plate)	109	
[26]	Supply plate	-	107	
[27]	Mounting	Optional for valve terminal mounting (on supply plate)	109	
[28]	Electrical interlinking module	For width 10 mm, 14 mm, 20 mm	95, 99, 103	
[29]	Sub-base	For four valve positions width 10 mm, 14 mm	94, 98	
[30]	Seal	-	_	
[31]	Electronics module	For connecting valves	95, 99, 103	

Pneumatic components of the valve terminal – CPI connection, fieldbus

The sub-bases are prepared for either

- 2 or 4 single solenoid valves
- 2 or 4 double solenoid valves depending on the size.
- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves.

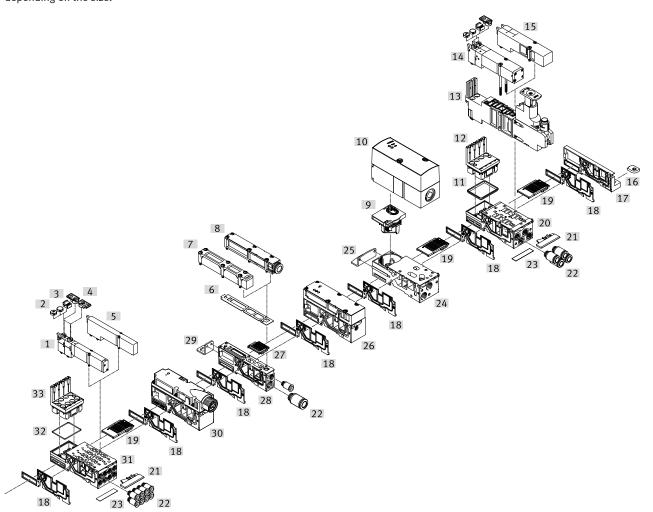

Valve terminal MPA-S

Peripherals overview

Designation Description		Description	→ Page/Internet
[1]	Solenoid valve	Width 10 mm, 14 mm	91, 96
2]	Cover cap, coded	After fitting the cover cap, the manual override is non-detenting only	106
3]	Cover cap, concealed	After fitting the cover cap, the manual override is blocked	106
4]	Inscription label holder	Can be pushed onto the manual override	102
5]	Cover plate	For unused valve position (vacant position), width 10 mm, 14 mm	91, 96
6]	Seal	-	_
7]	Flat plate silencer	-	-
3]	Exhaust air plate	For ducted exhaust air	107
9]	Electronics module	For proportional pressure regulator	104
		For soft-start/quick exhaust valve	104
10]	Proportional pressure regulator	-	104
	Soft-start/exhaust valve	-	85
11]	Seal	-	-
12]	Electronics module	For connecting valves	95, 99, 103
13]	Regulator plate	Vertical stacking (pressure regulator, vertical pressure shut-off plate, vertical pressure supply plate)	101
14]	Solenoid valve	Width 20 mm	100
15]	Cover plate	For unused valve position (vacant position), width 20 mm	106
16]	DIN rail mounting	-	109
17]	Right end plate	-	105
18]	Separating seal	For sub-base	106
19]	Electrical interlinking module	For fieldbus connection, for proportional pressure regulator, width 10 mm, 14 mm, 20 mm	95, 99, 103
20]	Sub-base	For two valve positions width 20 mm	102
21]	Paper foil label	For inscription label holder	_
22]	Fittings	For working ports	108
	Fittings	For pneumatic supply plate	108
23]	Paper foil label	For inscription label holder	-
24]	Sub-base	For soft-start/quick exhaust valve	104
25]	Mounting	Optional for valve terminal mounting (on sub-base of the soft-start/quick exhaust valve)	109
26]	Pressure sensor	-	106
27]	Electrical interlinking module	For fieldbus connection, for proportional pressure regulator, width 10 mm, 14 mm, 20 mm	95, 99, 103
28]	Supply plate	-	107
<u>.</u> 29]	Mounting	Optional for valve terminal mounting (on supply plate)	109
30]	Electrical supply plate	For auxiliary voltage supply for large valve terminals	106
31]	Sub-base	For four valve positions width 10 mm, 14 mm	94, 98
32]	Seal		<u> </u>
331	Electronics module		95, 99, 103

Valve terminal with multi-pin plug connection:

Order code:


- 32P-... for the pneumatic components
- 32E-... for the electrical components

MPA valve terminals with multipin plug connection can be expanded by up to 24 solenoid coils. The multi-pin plug connection is designed as a removable 25-pin Sub-D connection to IP65.

The cable can be selected when ordering:

- 2.5 m
- 5 m
- 10 m

In each case for max. 8 or 24 valves

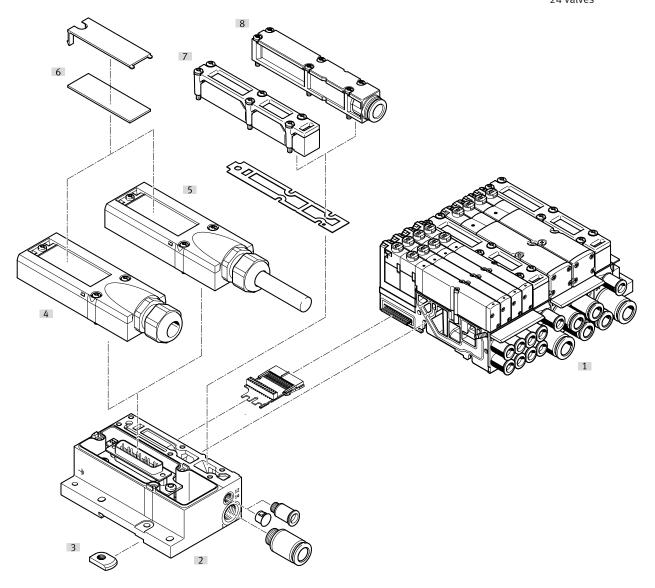

Desi	gnation	Description	→ Page/Internet
[1]	Valve terminal	With multi-pin plug connection	_
[2]	Electrical interface	For multi-pin plug	105
[3]	DIN rail mounting	-	109
[4]	Multi-pin plug connection	For self-assembly	107
[5]	Multi-pin plug connection	With multi-pin cable	107
[6]	Inscription labels	Large, for multi-pin plug connection	_
[7]	Flat plate silencer	For pneumatic interface	_
[8]	Exhaust air plate	For ducted exhaust air	107


Valve terminal with AS-Interface connection

Order code:

• 32P-... for the pneumatic components

• 52E-... for the electrical components

MPA valve terminals with AS-Interface can be expanded by up to 8 solenoid coils.

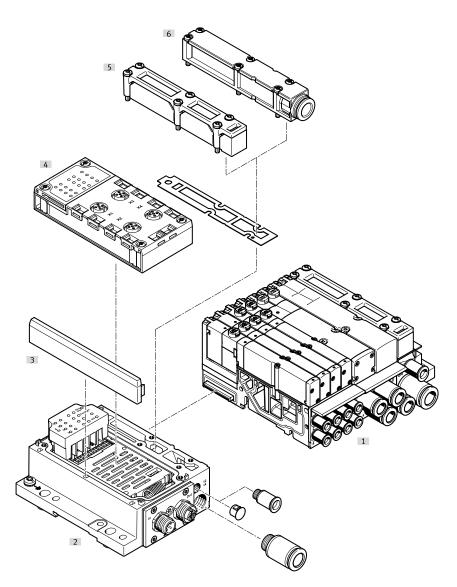


Designation		Description	→ Page/Internet
[1]	Valve terminal	with AS-interface connection	-
[2]	Electrical interface	-	105
[3]	Cover	-	_
[4]	Manifold block	_	105
[5]	Flat plate silencer	For pneumatic interface	_
[6]	Exhaust air plate	For ducted exhaust air	107

Valve terminal with CPI connection

Order code:

- 32P-... for the pneumatic components
- 56E-... for the electrical
- peripherals

MPA valve terminals with CPI connection can be expanded by up to 32 solenoid coils.

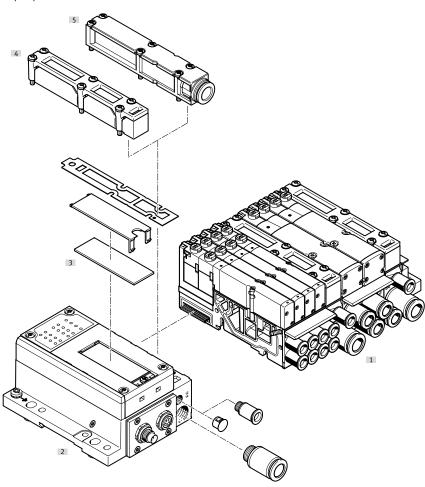

Desi	gnation	Description	→ Page/Internet
[1]	Valve terminal MPA	-	-
[2]	Electrical interface	-	105
[3]	Inscription labels	Large for CPI electrical interface	_
[4]	Flat plate silencer	For pneumatic interface	_
[5]	Exhaust air plate	For ducted exhaust air	107

Valve terminal with fieldbus interface, control block (electrical peripherals CPX)

Order code:


- 32P-... for the pneumatic components
- 50E-... for the electrical
- peripherals

Valve terminals with fieldbus interfaces can be configured with up to 16 sub-bases. In combination with MPA1 or MPA14 and 8 solenoid coils per sub-base, up to 128 solenoid coils can thus be used. An MPA2 with 4 solenoid coils per sub-base can actuate 64 solenoid coils.

Each valve position can be equipped with any valve or a cover plate. The rules for CPX apply to the equipment that can be used with the electrical peripherals CPX.

In general:

- Digital inputs/outputs
- Analogue inputs/outputs
- Parameterisation of inputs and outputs
- Integrated, convenient diagnostics
- Preventive maintenance concepts

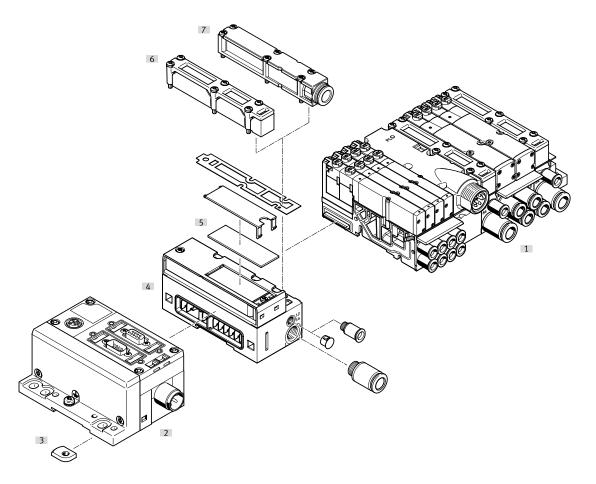

Designation		Description	→ Page/Internet
[1]	Valve terminal MPA	-	-
[2]	CPX modules	-	-
[3]	DIN rail mounting	-	109
[4]	Pneumatic interface	For CPX modules	105
[5]	Inscription labels	Large, for pneumatic interface CPX	-
[6]	Flat plate silencer	For pneumatic interface	-
[7]	Exhaust air plate	For ducted exhaust air	107

Valve terminal with fieldbus interface, control block (electrical peripherals CPX-AP-A)

Order code:


- 32P-... for the pneumatic components
- 50E-... for the electrical
- peripherals

Valve terminals with fieldbus interfaces can be configured with up to 16 sub-bases. In combination with MPA1 or MPA14 and 8 solenoid coils per sub-base, up to 128 solenoid coils can thus be used. An MPA2 with 4 solenoid coils per sub-base can actuate 64 solenoid coils.

Each valve position can be equipped with any valve or a cover plate. The rules for CPX apply to the equipment that can be used with the electrical peripherals CPX.


In general:

- Digital inputs/outputs
- Analogue inputs/outputs
- Parameterisation of inputs and outputs
- Integrated, convenient diagnostics
- Preventive maintenance concepts

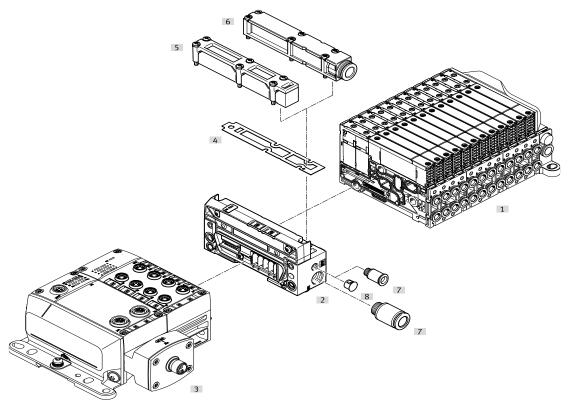

Desig	nation	Description	→ Page/Internet
[1]	Control block	CPX-AP-A	105
[2]	Pneumatic interface	For CPX modules	105
[3]	CPX modules	_	_
[4]	Seal	_	-
[5]	Flat plate silencer	For pneumatic interface	_
[6]	Exhaust air plate	For ducted exhaust air	107
[7]	Push-in fitting	-	108
[8]	Blanking plug	-	108

Sub-base valve



MPA offers a comprehensive range of valve functions. All valves have a patented sealing system, which ensures efficient sealing, a broad pressure range and a long service life. They have a pneumatic pilot control for optimising performance.

Compressed air is supplied via a pilot air supply port.

Sub-base valves can be replaced quickly since the tubing connections remain on the sub-base.

This design is also particularly flat.

Whatever valve function is required, there are sub-base valves with one solenoid coil (single solenoid) or with two solenoid coils (double solenoid or two single solenoid valves in one housing).

Design

Replacing valves

The valves are attached to the metal sub-base using two screws,

which means that they can be easily replaced. The mechanical sturdiness of the sub-base guarantees good long-term sealing.

Extension

Blanking plates can be replaced by valves at a later date. The dimensions, mounting points and existing pneumatic installations remain unchanged during this process. The valve code (M, MS, MU, J, N, NS, NU, K, KS, KU, H, HS, HU, B, G, E, X, W, D, DS, I) is located on the front of the valve beneath the manual override.

5/2-way	5/2-way valve				
Code	Circuit symbol	Valve size [mm]	Description		
M	14 4 2 12 12 14 5 1 3	10, 14, 20	 Single solenoid Pneumatic spring return Reversible Operating pressure -0.09 +1 MPa 		
MS	14 4 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10, 14, 20	 Single solenoid Mechanical spring return Reversible Operating pressure -0.09 +0.8 MPa 		
MU	14 4 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10	 Single solenoid Polymer poppet valve Mechanical spring return Reversible Operating pressure –0.09 +1 MPa 5/2-way function is achieved using two mechanically separate switching elements 		
J	14 4 2 12 7 T T T T T T T T T T T T T T T T T T T	10, 14, 20	 Double solenoid Reversible Operating pressure -0.09 +1 MPa 		

2x 3/2-	way valve		
Code	Circuit symbol	Valve size [mm]	Description
N	12/14 82/84 1 5 3	10, 14, 20	 Single solenoid Normally open Pneumatic spring return Operating pressure 0.3 1 MPa
NS	10 T T T T T T T T T T T T T T T T T T T	10, 14, 20	 Single solenoid Normally open Mechanical spring return Reversible Operating pressure -0.09 +0.8 MPa
NU	10 10 10 T T T T T T T T T T T T T T T T	10	 Single solenoid Polymer poppet valve Normally open Mechanical spring return Reversible Operating pressure -0.09 +1 MPa
K	12/14 1 5 82/84 3	10, 14, 20	Single solenoid Normally closed Pneumatic spring return Operating pressure 0.3 1 MPa
KS	12/14 82/84 1 5 3	10, 14, 20	 Single solenoid Normally closed Mechanical spring return Reversible Operating pressure -0.09 +0.8 MPa
KU	12/14 82/84 1 5 3	10	Single solenoid Polymer poppet valve Normally closed Mechanical spring return Reversible Operating pressure -0.09 +1 MPa
Н	12/14 82/84 1 5 3	10, 14, 20	 Single solenoid Normal position 1x normally closed 1x normally open Pneumatic spring return Operating pressure 0.3 1 MPa
HS	14 2 10 T T W 12/14 82/84 1 5 3	10, 14, 20	 Single solenoid Normal position 1x normally closed 1x normally open Mechanical spring return Reversible Operating pressure -0.09 +0.8 MPa
ни	12/14 82/84 1 5 3	10	 Single solenoid Polymer poppet valve Normal position 1x normally closed 1x normally open Mechanical spring return Reversible Operating pressure -0.09 +1 MPa

5/3-way	5/3-way valve				
Code	Circuit symbol	Valve size [mm]	Description		
В	14 W 12 W 12 14 84 5 1 3 82 12	10, 14, 20	 Mid-position pressurised¹⁾ Mechanical spring return Reversible Operating pressure –0.09 +1 MPa 		
G	14 W 4 2 W 12 14 84 5 1 3 82 12	10, 14, 20	Mid-position closed ¹⁾ Mechanical spring return Reversible Operating pressure –0.09 +1 MPa		
E	14 W 12 W 12 14 84 5 1 3 82 12	10, 14, 20	Mid-position exhausted ¹⁾ Mechanical spring return Reversible Operating pressure –0.09 +1 MPa		

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both coils are energised at the same time, the valve remains in the previously assumed switching position.

3/2-way v	alve		
Code	Circuit symbol	Valve size [mm]	Description
W	20(14) 4 2 2 20(14) 84 2 5	10, 14, 20	Single solenoid Normally open External pressure supply Pneumatic spring return Reversible Operating pressure –0.09 +1 MPa Pressure supplied at working port 2 (–0.09 +1 MPa) can be switched with both internal and external pilot air supply.
X	42 (14) 2 	10, 14, 20	Single solenoid Normally closed External pressure supply Pneumatic spring return Reversible Operating pressure –0.09 +1 MPa Pressure supplied at working port 4 (–0.09 +1 MPa) can be switched with both internal and external pilot air supply.


2x 2/2-	2x 2/2-way valve					
Code	Circuit symbol	Valve size [mm]	Description			
D	12/14 82/84 1	10, 14, 20	 Single solenoid Normally closed Pneumatic spring return Operating pressure 0.3 1 MPa 			
DS	12/14 82/84 1	10, 14, 20	 Single solenoid Normally closed Mechanical spring return Reversible Operating pressure -0.09 +0.8 MPa 			
I	12/14 82/84 5 1	10, 14, 20	 Single solenoid 1x normally closed 1x normally closed, reversible only Pneumatic spring return Operating pressure 0.3 1 MPa Vacuum at port 3/5 only 			

- 🏺 - Note

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

Pilot air	Pilot air switching valve				
Code	Circuit symbol	Valve size [mm]	Description		
IS	12 (14)2 1 3(4)	10, 14	 Single solenoid Normally closed Mechanical spring return Operating pressure 0.3 0.8 MPa With internal power supply 		
IU	12 (14)2	10,	Single solenoid Normally closed Mechanical spring return Operating pressure 0.3 0.8 MPa With internal power supply With external sensor M8 plug connector		
ES	12 (14)2 (2)1 3(4)	10,	 Single solenoid Normally closed Mechanical spring return Operating pressure 0.3 0.8 MPa With external power supply 		
EU	12 (14)2 (2)1 3(4)	10,	 Single solenoid Normally closed Mechanical spring return Operating pressure 0.3 0.8 MPa With external power supply With external sensor M8 plug connector 		

Vertical stacking




Additional functional units can be added to each valve position between the sub-base and the valve.

These functions are known as vertical stacking modules and enable special functions or

control of an individual valve position.

Pressure regulator plate



An adjustable pressure regulator can be installed between the sub-base and the valve in order to control the force of the triggered actuator.

This pressure regulator maintains a constant output pressure (secondary side) independent of


pressure fluctuations (primary side) and air consumption.
Standard version:

- For pressure regulation up to 6 bar or up to 10 bar
- Without pressure gauge (optional, rotatable, M5 connection with MPA1,

cartridge connection with MPA2)

- MPA2: Regulator head with 3 positions (locked, reference position, idle running)
- MPA1: Set using screwdriver

Vertical pressure shut-off plate for MPA1




The vertical pressure shut-off plate can be used to hot swap individual valves without switching off the overall air supply.

The working pressure for the individual valve can be switched off manually via the vertical pressure shut-off plate using the actuating element.

Vertical stacking

Vertical pressure supply plate for MPA2



This vertical pressure supply plate enables an individual valve to be supplied with individual operating pressure independently of the operating pressure of the valve terminal.

The exhaust and pilot air supply of the valve are still provided via the central ports of the valve terminal.

Check valve



The check valves prevent the air (back pressure) from exhaust ducts 3 and 5 from entering the solenoid valve,

preventing the back pressure from having a disruptive effect on other connected actuators.

The check valves are integrated into ducts 3 and 5 of the sub-bases designed specifically for this.

Please see the relevant assembly instructions:

→ www.festo.com/catalogue/ mpa → Support/Downloads. This function makes it possible to effectively protect single-acting process valves from the effects of back pressure.


This ensures reliable and feedback-free switching operations, especially in the case of rapid switching operations.

· 🖥 - Note

- Special sub-bases are available for use with check valves
- Standard sub-bases cannot be retrofitted with check valves.
- Pre-assembled sub-bases with integrated check valves are available.
- Check valves and fixed flow restrictors cannot be used at the same time (in the same duct).


Vertical stacking

Vertical stacking components, valve size 10 mm

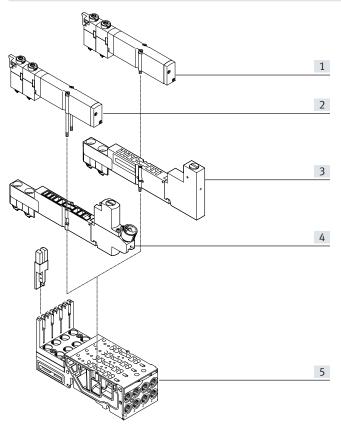


- [1] Valve VMPA1
- [2] Valve VMPA1, retaining screws replaced by long version (included in the scope of delivery of the regulator plate)
- [3] Vertical pressure shut-off plate VMPA1-HS
- [4] Regulator plate VMPA1
- [5] Sub-base

Vertical stacking components, valve size 20 mm

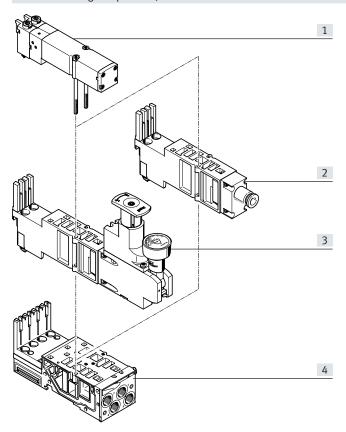

- [1] Valve VMPA2
- [2] Vertical pressure supply plate
- 3] Regulator plate VMPA2
- [4] Sub-base

Fixed flow restrictor for manifold sub-bases MPA1

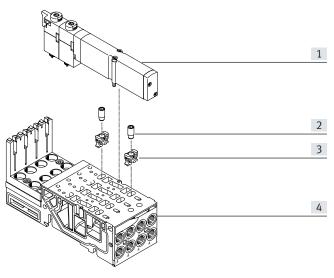


The fixed flow restrictor can be used to permanently set the exhaust flow rate in ducts 3 and 5. To be able to screw the restrictor into the sub-base, the retaining bracket is first pressed into the exhaust openings on the sub-base as far as the stop.

The fixed flow restrictor can then be screwed in flush with the top side of the retaining bracket. The restrictor screw cuts a thread into the retaining bracket as it is screwed in. As the restrictor is being screwed in, two hooks on the retaining bracket also deform to secure it into the sub-base.

- [1] Valve VMPA1
- [2] Fixed flow restrictor
- [3] Retaining bracket
- [4] Sub-base

Vertical stacking

Check valve

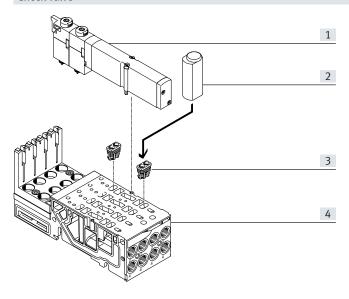

- [1] Valve VMPA14
- [2] Assembly tool
- [3] Check valve
- [4] Sub-base

Festo check valves can only be used in combination with the sub-bases designed specifically for this purpose.

The check valves should be installed according to the specifications using the enclosed assembly tool. Once installed, the check valves cannot be removed.

Please see the relevant assembly instructions:

→ www.festo.com/catalogue/ mpa → Support/Downloads.

There are special sub-bases available that facilitate the installation of check valves for widths 14 mm and 20 mm.




Note

- Special sub-bases are available for use with check valves.
- Standard sub-bases cannot be retrofitted with check valves.
- Pre-assembled sub-bases with integrated check valves are available.
- Check valves and fixed flow restrictors cannot be used at the same time (in the same duct).

Vertical stacking

Mode of operation of the pressure regulator plate (P regulator) for port 1; code: PA, PF



This pressure regulator regulates the pressure upstream of the valve in duct 1. Ducts 2 and 4 thus have the same regulated pressure. During exhausting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5.

Advantages


- The pressure regulator is not affected by exhausting, since the pressure is regulated upstream of the valve.
- The pressure regulator can always be adjusted, since the

pressure from the valve terminal is always present.

Application examples

- An equal working pressure is required at working ports 2 and 4.
- A working pressure (e.g. 3 bar) lower than the operating pressure at the valve terminal (e.g. 8 bar) is required.

Operating mode of the pressure regulator plate (B regulator) for port 2; code: PC, PH



This pressure regulator regulates the pressure in duct 2 after the pressure medium flows through the valve. During exhausting, the air flow in the valve is exhausted from duct 2 to duct 3 via the pressure regulator.

Constraints

The pressure regulator can only be adjusted in the switched state

(e.g. the valve has switched to 2 and exhausts from 4 to 5).


Application example

The pressure regulator facilitates the reduction of pressure at port 2 of an individual valve rather than

the operating pressure of the valve terminal

Vertical stacking

Operating mode of the pressure regulator plate (A regulator) for port 4; code: PB, PK



This pressure regulator regulates the pressure in duct 4 after the pressure medium flows through the valve. During exhausting, the air flow in the valve is exhausted from duct 4 to duct 5 via the pressure regulator.

Constraints

The pressure regulator can only be adjusted in the switched state


(e.g. the valve has switched to 4 and exhausts from 2 to 3).

Application example

If different working pressures are required at ports 4 and 2. The

pressure from duct 1 is present at port 2.

Operating mode of the pressure regulator plate (B regulator, reversible) for port 2, reversible; code: PL, PN



The reversible B regulator splits the supply air in duct 1 and regulates the pressure upstream of the valve in duct 3 (the unregulated pressure from duct 1 is in duct 5). The regulated air is then routed to duct 2. The valve is thus operated in reverse mode.

During exhausting, the exhaust flow in the valve is from duct 2 to duct 1 and the air is returned to duct 3 via the intermediate plate.

Application examples

- If a different pressure than the operating pressure of the valve terminal is required in duct 2.
- When fast exhausting is required.
- When the pressure regulator must always be adjustable.

- N

Reversible pressure regulator plates should only be combined with valves that can be operated in reverse mode.

Advantages


- Fast cycle times
- 50% higher exhaust flow rate, as air is not exhausted via the pressure regulator. The load on the pressure regulator is also reduced.
- No quick exhaust valves are required.
- Operating pressure is always present at the pressure regulator, as the pressure is regulated upstream of the valve, i.e. the regulator can always be adjusted.

Constraints

2x 3/2-way valves (code N, K,
 H) cannot be used, as pressure is present at ports 3 and 5.

Vertical stacking

Operating mode of the pressure regulator plate (A regulator, reversible) for port 4, reversible; code: PK, PM



The reversible A regulator splits the working air in duct 1 and regulates the pressure upstream of the valve in duct 5 (the unregulated pressure from duct 1 is in duct 3). The regulated air is then routed to duct 4. The valve is thus operated in reverse mode.

During exhausting, the exhaust flow in the valve is from duct 4 to duct 1 and the air is returned to duct 5 via the intermediate plate.

Application examples

- If a different pressure than the operating pressure of the valve terminal is required in duct 4.
- When fast exhausting is
- required.

Advantages

- Fast cycle times
- 50% higher exhaust flow rate, as air is not exhausted via the pressure regulator. The load on the pressure regulator is also reduced.
- No quick exhaust valves are required.
- Operating pressure is always present at the pressure regulator, as the pressure is regulated upstream of the valve, i.e. the regulator can always be adjusted.

• When the pressure regulator

must always be adjustable.

- **.**

Note

Reversible pressure regulator plates should only be combined with valves that can be operated in reverse mode.

Constraints

2x 3/2-way valves (code N, K,
 H) cannot be used, as pressure is present at ports 3 and 5.

Vertical	stacking – Pressure regulator p	late		
Code		Width	Control range	Description
		[mm]		
Pressure	e regulator plate for port 1 (P re	gulator)		
PA	5-	10	Up to max. 8.5 bar	Regulates the operating pressure in duct 1 upstream of the directional control valve
		14		
	1 1	20		
PF	 	10	Up to max. 6 bar	
	7	14		
		20		
Pressure	e regulator plate for port 2 (B re	gulator)		
PC		10	Up to max. 8.5 bar	Regulates the operating pressure in duct 2 downstream of the directional control
		14	'	valve
	1 2	20		
PH	-	10	Up to max. 6 bar	-
		14	op to maxii o za.	
		20		
	regulator plate for port 4 (A re	gulator)		
PB	(≥ -	10	Up to max. 8.5 bar	Regulates the operating pressure in duct 4 downstream of the directional control
	1 4	14		valve
		20		
PG		10	Up to max. 6 bar	
		14		
		20		
Pressure	e regulator plate for port 2, reve	rsible (B regi	ulator)	
PL		20	Up to max. 8.5 bar	Reversible pressure regulator for port 2
PN	┦│≹(╲)│	20	Up to max. 6 bar	1
	$ _1 $ $ _2$		'	
	│ ▔│▐<mark>▀▗▀</mark>▎▖▎▔			
Pressure	e regulator plate for port 4, reve	rsible (A regu	ılator)	
PK	5-0	20	Up to max. 8.5 bar	Reversible pressure regulator for port 4
PM		20	Up to max. 6 bar	1
	1 4		'	

Description of proportional pressure regulator

The proportional pressure regulator VPPM-... is used to regulate pressure proportional to a specified setpoint value.

A built-in pressure sensor records the pressure at the working port and compares this value with the setpoint value. If there are deviations between the setpoint

value and actual value, the valve regulates until the output pressure has reached the setpoint value. For a constant pressure supply, which is required for high control quality, the proportional pressure regulator has an additional supply port.

The proportional pressure regulator can be configured via the PLC or on-site via the interface for CPX-FMT. The proportional pressure regulator can be used for CPI connection and fieldbus.



Note


The output pressure will be unregulated if there is a break in the power supply cable.

Proportional pressure regi	ulator				
Illustration	Code	Туре	Linearity error full-scale [%]	Input pressure 1 [MPa]	Pressure regulation range [MPa]
	QA	VPPM-6TA-L-1-F-0L2H	2	0 0.4	0.002 0.2
	QB	VPPM-6TA-L-1-F-0L6H	2	0 0.8	0.006 0.6
	QC	VPPM-6TA-L-1-F-0L10H	2	0 1.1	0.01 1
	> QD	VPPM-6TA-L-1-F-0L2H-S1	1	0 0.4	0.002 0.2
	QE	VPPM-6TA-L-1-F-0L6H-S1	1	00.8	0.006 0.6
	QF	VPPM-6TA-L-1-F-0L10H-S1	1	0 1.1	0.01 1
	QG	VPPM-8TA-L-1-F-0L2H-C1	2	0 0.4	0.002 0.2
	QH	VPPM-8TA-L-1-F-0L6H-C1	2	0 0.8	0.006 0.6
\checkmark	QK	VPPM-8TA-L-1-F-0L10H-C1	2	0 1.1	0.01 1
	QL	VPPM-8TA-L-1-F-0L2H-S1C1	1	0 0.4	0.002 0.2
	QM	VPPM-8TA-L-1-F-0L6H-S1C1	1	0 0.8	0.006 0.6
	QN	VPPM-8TA-L-1-F-0L10H-S1C1	1	0 1.1	0.01 1

Soft-start/exhaust valve			
Illustration	Code	Туре	
	_	VABF-S6-1-P5A4S2YE-G12-1T1L-PZ	
9	_	VABF-S6-1-P5A4S1YE-G12-1T1L-PZ	
	-	VABF-S6-1-P5A4S2S-G12-1T1L-PZ	
	_	VABF-S6-1-P5A4S1S-G12-1T1L-PZ	


Terms related to the proportional-pressure regulator

Hysteresis




There is always a linear relationship within a certain tolerance between the setpoint value entered and the pressure output. Nevertheless, it makes a difference whether the setpoint value is entered as rising or falling. The difference between the maximum deviations is referred to as hysteresis.

Linearity error



A perfectly linear progression of the control characteristic of the output pressure is theoretical. The maximum percentage deviation from this theoretical control characteristic is referred to as the linearity error. The percentage value refers to the maximum output pressure (full scale).


Response sensitivity



The response sensitivity of the device determines how sensitively one can change, i.e. adjust, a pressure.


The smallest setpoint value difference that results in a change in the output pressure is referred to as the response sensitivity. In this case, 0.01 bar.

Repetition accuracy (reproducibility)



The repetition accuracy is the margin within which the fluidic output variable is scattered when the same electrical input signal coming from the same direction is repeatedly adjusted. The repetition accuracy is expressed as a percentage of the maximum fluidic output signal.

Zero point suppression



In practice, there can be a residual voltage or residual current at the setpoint input of the VPPM via the setpoint generator.

Zero point suppression is used so the valve is reliably exhausted at a setpoint value of zero.

Cover plate




Plate without valve function for reserving valve positions on a valve terminal.

Valve and cover plates are attached to the sub-base using two screws.

Valve function					
Code	Circuit symbol	Width	Description		
		[mm]			
L	-	10,	For valve terminal only: cover plate for valve position		
		14,			
		20			

Compressed air supply and exhaust

Pneumatic interface




The valve terminal MPA can be supplied with air at one or more points. This ensures that the valve terminal will always have an adequate air supply and exhaust, even with large-scale expansions. The main supply to the valve terminal is located on the pneumatic interface, which links

the electrical and pneumatic parts. Additional provision is made for several supply plates.

Exhausting is either via integrated flat plate silencers or common lines for ducted exhaust air.
These exhausts are located on the pneumatic interface as well as on

the supply plates and on the right end plate (VMPA-EPR-G).


Supply plate



When there is a need to increase the air supply, additional supply plates can be provided. Exhausting is either via integrated flat plate silencers or common lines for ducted exhaust air.
In the case of ducted exhaust air, at least one additional supply

plate is required, which is used to exhaust the air from the pilot air supply (port 82/84) (when using a right end plate without port 82/84).

Vertical pressure supply plate



The individual compressed air supply of a single valve with a width of 20 mm can be realised using the vertical pressure supply plate VMPA2-VSP-

End plate, right



The exhaust air can be ducted using the right end plate with port 82/84.



Pilot air supply

The port for the main pneumatic supply is located on the pneumatic interface.

The ports differ for the following types of pilot air supply:

- Internal
- External

Internal pilot air supply

Internal pilot air supply can be selected if the required working pressures are between 0.3 and 0.8 MPa.

The pilot air supply is then branched from the working air 1 in the pneumatic interface using an internal connection. Port 12/14 is sealed with a blanking plug.

External pilot air supply

If the supply pressure is less than 0.3 MPa or greater than 0.8 MPa, you must operate your MPA valve terminal with external pilot air supply.

In this case, the pilot air is additionally supplied via port 12/14 on the pneumatic interface.

- 📗

Note

If a gradual pressure build-up in the system using a soft-start valve is chosen, an external pilot air supply should be connected so that the pilot pressure applied during switch-on is already very high.

Pilot air switching valve

Internal pilot air supply

Normal position:

The pilot air switching valve supplies the downstream valves in a pressure zone with pilot air (12/14). The pilot air switching valve can be used to implement the safety function "Protection against unexpected start-up".

• Pressure is supplied via duct 1.

sealed with a blanking plug.

• Operating pressure of 0.3...0.8

• Duct 2 on the sub-base is

MPa required in duct 1.

• In the normal position of the

valve, duct 14 is exhausted to

atmosphere via port 4 of the

switching valve can be supplied either internally via duct 1 of the valve terminal (or pressure zone) or externally via port 2 of the subbase on which the pilot air switching valve is located.

The compressed air to the pilot air

Switching status:

- In the switched position, duct 12/14 of the valve terminal is supplied with pressure from duct 1 via the pilot air switching
- The integrated pressure sensor indicates the presence of pressure in duct 12/14.

In the case of internal pressure supply from duct 1, vacuum operation (in duct 1) is not possible.

External pilot air supply

Normal position:

- Pressure is supplied via duct 2.
- The connection between duct 1 and the valve is closed.
- No restriction on the operating pressure in duct 1.
- In the normal position of the valve, duct 14 is exhausted to atmosphere via port 4 of the sub-base (silencer).

When configuring the compressed air supply, please ensure that the pilot air switching valve has a working pressure of 0.3...0.8 MPa. Like all valves MPA, the pilot air switching valve has a manual override.

Switching status:

- In the switched position, duct 12/14 of the valve terminal is supplied with pressure from duct 2 via the pilot air switching valve.
- The integrated pressure sensor indicates the presence of pressure in duct 12/14.


Soft-start valve


sub-base (silencer).

The soft-start/quick exhaust valve is used for slow and safe build-up of the supply pressure and quick exhausting of duct 1 of the valve terminal.

Pilot air to the valve terminal can be supplied either via the softstart valve with internal pilot air or via the various end plate variants with external pilot air. The switching on process takes place step by step:

- For valves with pilot air supply, the valve switches the full operating pressure to duct 12/14 when the control signal is applied
- The working pressure provided for duct 1 increases slowly; the flow can be adjusted using the flow control screw.
- Once the working pressure in duct 1 reaches half the operating pressure, the softstart valve switches to full operating pressure at duct 1 of the valve terminal.

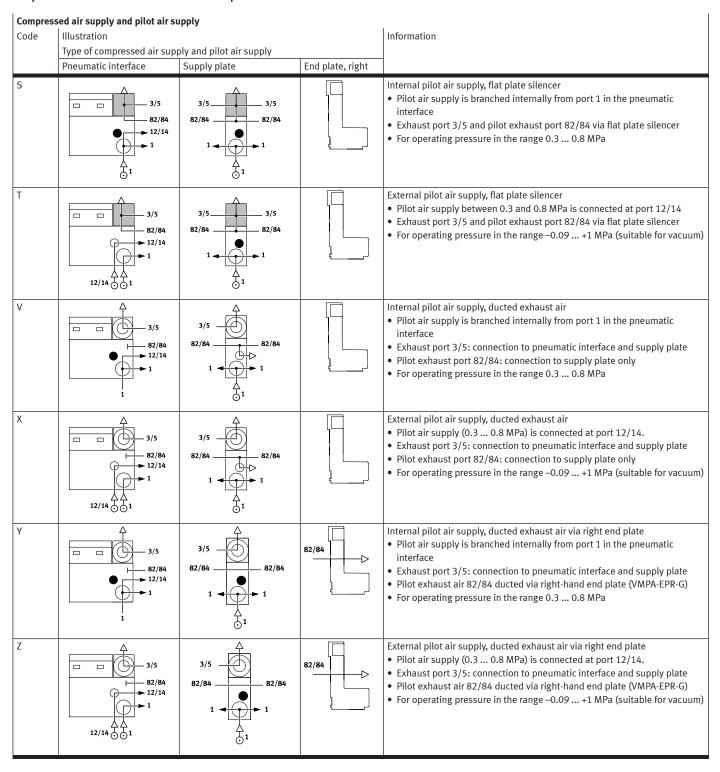

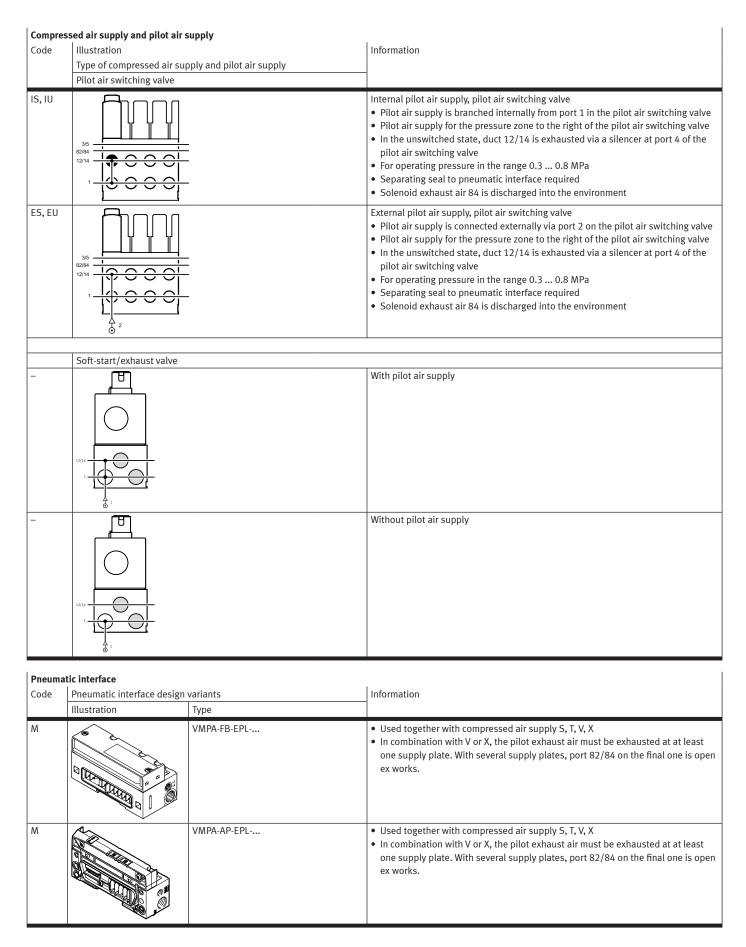

Supply plate

Additional supply plates can be used for larger terminals or to create pressure zones.

If several valves are to be operated simultaneously at full flow rate, it is recommended that a supply plate be positioned after every 8 valves (MPA1 or MPA14), or every 4 valves (MPA2).

Supply plates can be configured at any point upstream or downstream of sub-bases.

This applies to the following interfaces:

- MPA with CPX
- MPA with multi-pin plug connection
- MPA with AS-Interface connection
- MPA with CPI connection

MPA with ducted exhaust air

When using a right end plate without port 82/84, it is essential that a supply plate for ducted exhaust air is used. Alternatively, an end plate with port 82/84 (VMPA-EPR-G) can be used for ducted exhaust air. In this case, no supply plate is required.

Supply plates contain the ports:

- Compressed air supply (1)
- Exhaust for the pilot air supply (82/84) and pressure compensation
- Exhaust air (3/5)
 Depending on your order, the exhaust ducts are either ducted or vented via the flat plate silencer.

The supply plate is configured using the code letter U if no directly adjoining separating seal is required.

If a separating seal (S, T or R) is selected directly to the right or left of the supply plate, then the code letter V or W identifies the position of the left or right separating seal. The code for the separating seal (S, T or R) is placed in front of the code for the supply plate (V or W).

Code ¹⁾	Illustration	Туре	Information	
U		VMPA1SP	Supply plate without separating seal (no R, S or T selected)	
V		VMPA1SP	Supply plate with separating seal on left, if R, S or T selected	
W		VMPA1SP	Supply plate with separating seal on right, if R, S or T selected	

¹⁾ Depending on the air supply code S, T, V, X, the supply plate is equipped with a silencer or an exhaust plate.

Creating pressure zones and separating exhaust air



MPA offers a number of options for creating pressure zones if different working pressures are required. Depending on the electrical interface, up to 16 pressure zones are possible. A pressure zone is created by isolating the internal supply ducts between the sub-bases using an appropriate separating seal or using a separator that is permanently integrated in the sub-base (code I or code III).

Compressed air is supplied and exhausted via a supply plate. The position of the supply plates and separating seals can be freely selected with the valve terminal MPA.

Separating seals are integrated ex-works as per your order.
Separating seals can be recognised by their coding, even when the valve terminal is assembled.



Note

The following must be taken into account for expansion or conversions at a later date: Different separating seals are required for operation with ducted exhaust air and operation with flat plate silencers.

Code	For operation with flat plate silencer		For operation with ducted exhaust air	Information	
	Illustrated examples	Coding	Illustrated examples	Coding	
-	VMPADPU		VMPADP		No duct separation
T	VMPADPU-P		5 1 3 VMPADP-P		Duct 1 separated
S	VMPADPU-PRS		VMPADP-PRS		Duct 1 and 3/5 separated
R	VMPADPU-RS		VMPADP-RS		Duct 3/5 separated

Creating	Creating pressure zones – using a separating seal						
Code	For operation with pilot air switching v	ralve	Information				
	Illustrated examples	Coding					
К	5 1 3		Seal with duct separation 12/14 and 1, 3, 5 Coding with yellow mark				
N ¹⁾	5 1 3		Seal with duct separation 12/14 Coding with black mark				

¹⁾ Only in combination with additional feed/supply plate

Creating	pressure zones – via sub-base		
Code	For operation with flat plate silencer or with	ducted exhaust air	Information
	Illustrated examples	Coding	
I	5 1 3 0		Duct 1 separated (short mark)
III	5 1 3 0		Duct 1 and 3/5 separated (long mark)



Duct separation cannot be removed at a later date and takes place in the centre of the sub-base:


- Between valve 2 and 3 for width 10 mm
- Between valve 2 and 3 for width 14 mm
- Between valve 1 and 2 for width 20 mm


Examples: Compressed air supply and pilot air supply

Internal pilot air supply, flat plate silencer

Pneumatic supply to the valve terminal: code S

The illustration on the right shows an example of the configuration and connection of the air supply with internal pilot air supply. Port 12/14 on the pneumatic interface or on the electrical interface (multi-pin) is tightly sealed. Ports 3/5 and 82/84 are exhausted via the flat plate silencers. Port 82/84 is tightly sealed. Separating seals can optionally be used to create pressure zones.



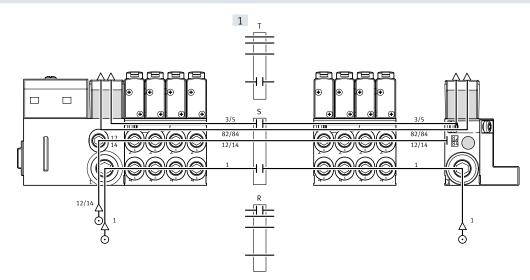


External pilot air supply, flat plate silencer

Pneumatic supply to the valve terminal: code T

The illustration on the right shows an example of how the compressed air supply is configured and connected when using external pilot air supply. Port 12/14 on the pneumatic interface or the electrical interface (multi-pin) is therefore equipped with a fitting. Ports 3/5 and 82/84 are exhausted via the flat plate silencers. Port 82/84 is tightly sealed. Separating seals can optionally be used to create pressure zones.

[1] Optional separating seal

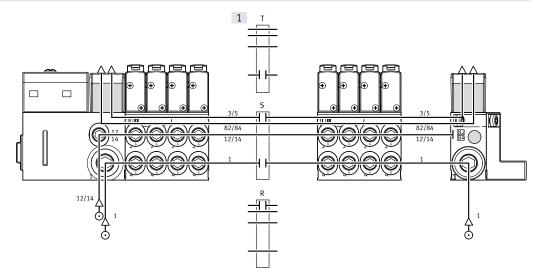


Examples: Compressed air supply and pilot air supply

Internal pilot air supply, ducted exhaust air

Pneumatic supply to the valve terminal: code V

The illustration on the right shows an example of the configuration and connection of the compressed air supply with internal pilot air supply. Port 12/14 on the pneumatic interface or on the electrical interface (multi-pin) is tightly sealed. Exhaust ports 3/5 and 82/84 are exhausted via the appropriate connections. Separating seals can optionally be used to create pressure zones.



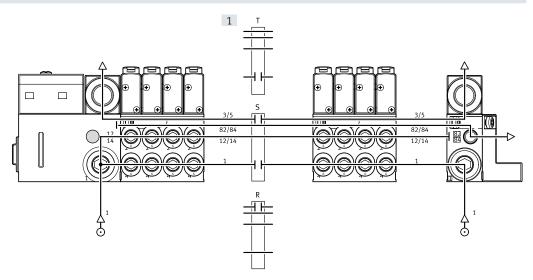


External pilot air supply, ducted exhaust air

Pneumatic supply to the valve terminal: code X

The illustration on the right shows an example of the configuration and connection of the compressed air supply in the case of external pilot air supply. Port 12/14 on the pneumatic interface or the electrical interface (multipin) is therefore equipped with a fitting. Exhaust ports 3/5 and 82/84 are exhausted via the appropriate connections. Separating seals can optionally be used to create pressure zones.

[1] Optional separating seal

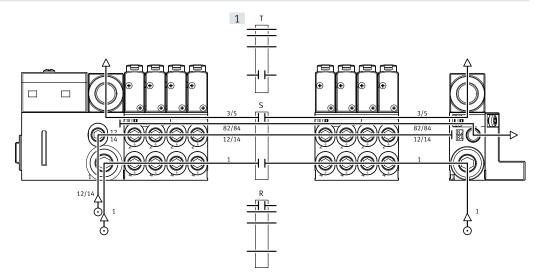


Examples: Compressed air supply and pilot air supply

Internal pilot air supply, ducted exhaust air 82/84 via right end plate

Pneumatic supply to the valve terminal: code Y

The illustration on the right shows an example of the configuration and connection of the compressed air supply with internal pilot air supply. Port 12/14 on the pneumatic interface or on the electrical interface (multi-pin) is tightly sealed. The exhaust port 3/5 is exhausted via the corresponding ports. The exhaust air from port 82/84 is ducted via the right end plate (VMPA-EPR-G). In this case, there is no need for a power supply module for exhausting the ducted exhaust air 82/84. Separating seals can optionally be used to create pressure zones.

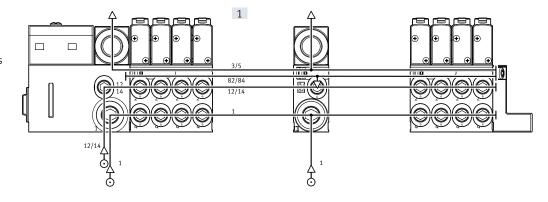


[1] Optional separating seal

External pilot air supply, ducted exhaust air 82/84 via right end plate

Pneumatic supply to the valve terminal: code Z

The illustration on the right shows an example of the configuration and connection of the compressed air supply in the case of external pilot air supply. Port 12/14 on the pneumatic interface or the electrical interface (multipin) is therefore equipped with a fitting. The exhaust port 3/5 is exhausted via the corresponding ports. The exhaust air from port 82/84 is ducted via the right end plate (VMPA-EPR-G). In this case, there is no need for a power supply module for exhausting the ducted exhaust air 82/84. Separating seals can optionally be used to create pressure zones.

[1] Optional separating seal

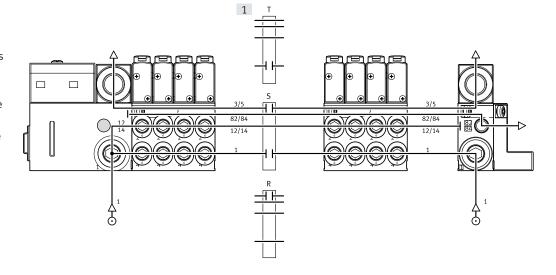

Examples: Compressed air supply and pilot air supply


Pilot air switching valve for internal pilot air supply

Pneumatic supply to the valve terminal with internal pilot air.

Second pressure zone with pilot air switching valve with internal pilot air supply: code IU, IS

The illustration on the right shows an example of the configuration and connection of the compressed air supply with internal pilot air supply. Port 12/14 on the pneumatic interface or on the electrical interface (multi-pin) and on the pilot air switching valve is tightly sealed. Exhaust ports 3/5 and 82/84 are exhausted via the appropriate connections. The separating seal is essential when using the pilot air switching valve. Pilot air supply for the pressure zone to the right of the pilot air switching valve can be individually switched off by the pilot air switching valve of duct 1 of this pressure zone.

- [1] Separating seal, specifically for pilot air switching valve with separation of duct 12/14
- [2] Pilot air switching valve for internal pilot air supply

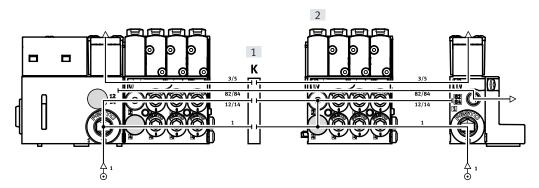

Examples: Compressed air supply and pilot air supply


Pilot air switching valve for external pilot air supply

Pneumatic supply to the valve terminal with external pilot air.

Second pressure zone with pilot air switching valve with external pilot air supply: code EU, ES


The illustration on the right shows an example of the configuration and connection of the compressed air supply in the case of external pilot air supply. Port 12/14 on the pneumatic interface or the electrical interface (multipin) is therefore equipped with a fitting. Exhaust ports 3/5 and 82/84 are exhausted via the appropriate connections. A separating seal with separation of duct 12/14 is essential when using the pilot air switching valve. Pilot air supply for the pressure zone to the right of the pilot air switching valve can be individually switched off by the pilot air switching valve. The pilot air switching valve obtains the compressed air supply for the pilot air from port 2 of the subbase.

- [1] Separating seal, specifically for pilot air switching valve with separation of duct 12/14
- [2] Pilot air switching valve for external pilot air supply

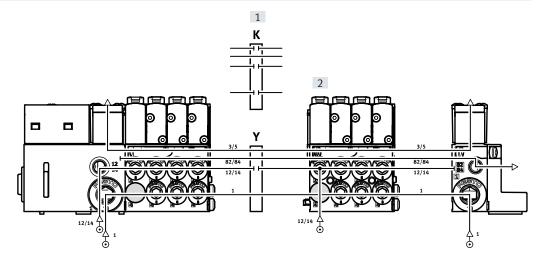


Examples: Compressed air supply and pilot air supply

Soft-start/quick exhaust valve with pilot air supply

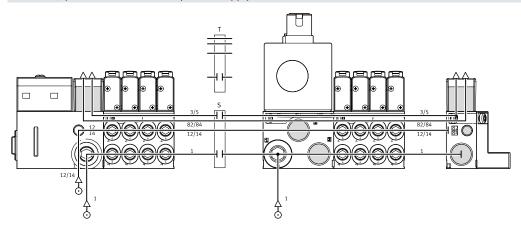

Examples: Compressed air supply and pilot air supply

Soft-start/quick exhaust valve without pilot air supply

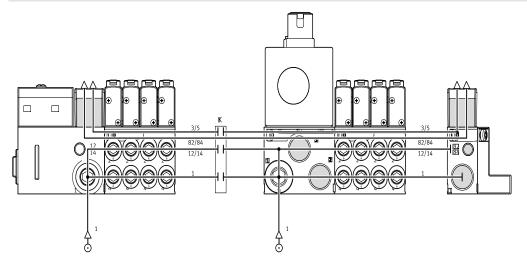


Examples: Creating pressure zones

MPA with CPX terminal connection

The illustration shows an example of the configuration and connection of three pressure zones using separating seals – with external pilot air supply.


- [1] Zone 1
- [2] Zone 2
- [3] Zone 3
- [4] Pilot air supply
- [5] P1
- [6] P2
- [7] P3

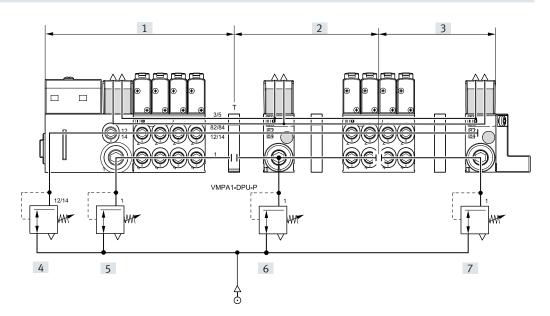

MPA with multi-pin plug connection

The illustration shows an example of the configuration and connection of the pressure zones – with external pilot air supply.

- [1] Zone 1
- [2] Zone 2
- [3] Pilot air supply
- [4] P1
- [5] P2

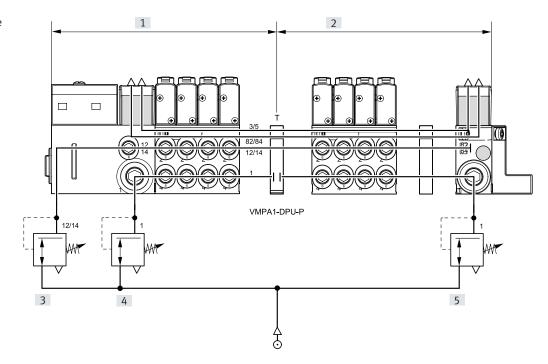


Examples: Creating pressure zones

MPA with CPX-AP-A terminal connection

The illustration shows an example of the configuration and connection of three pressure zones using separating seals – with external pilot air supply.

- [1] Zone 1
- [2] Zone 2
- [3] Zone 3
- [4] Pilot air supply
- [5] P1
- [6] P2
- [7] P3

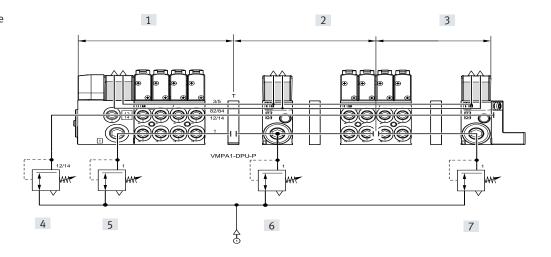

Examples: Creating pressure zones


Sub-base with pressure zone separation in duct 1

Another option for pressure zone separation can be achieved by using sub-bases with pressure zone separation.

The illustration on the right shows the variant with pressure zone separation in duct 1.

Pilot air supply

- [1] Zone 1
- [2] Zone 2
- [3] Pilot air supply
- [4] P1
- [5] P2

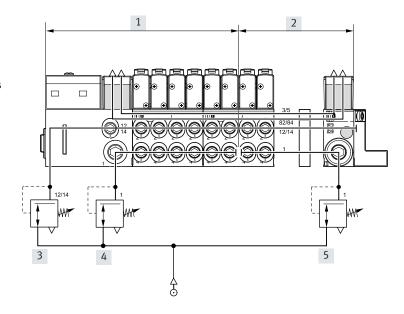


Sub-base with pressure zone separation in duct 1 and duct 3/5


The illustration on the right shows the variant with pressure zone separation in duct 1 and duct 3/5.

Pilot air supply

- [1] Zone 1
- [2] Zone 2
- [3] Pilot air supply
- [4] P1
- [5] P2

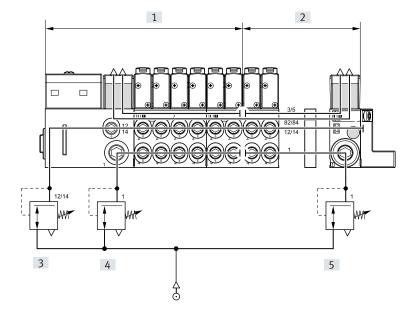

Sub-base



MPA is based on a modular system consisting of sub-bases and valves. The sub-bases are screwed together, thus forming the support system for the valves. They contain the ducts for supplying compressed air to and exhausting the valve terminal as

well as the working ports for the pneumatic drives for each valve. Each sub-base is connected to the next using three screws. Individual valve terminal sections can be isolated and further blocks can be inserted by loosening these screws. This ensures that

the valve terminal can be rapidly and reliably extended.

Sub-bas	se variants				
Code	Illustration	Туре	Width [mm]	Number of valve positions (solenoid coils)	Information
	se for multi-pin plug/fieldbus co	nnection			
A, C ¹⁾		VMPA1-FB-AP-4-1	10	4 (8/4¹)	Working ports (2, 4) on the sub-base • Connection sizes: MPA1: M7, QS4, QS6
AI, CI ¹⁾		VMPA1-FB-AP-4-1-T1			Code I: duct 1 separated in the sub- base Code III: duct 1 and duct 3/5
AIII, CIII ¹⁾	, v	VMPA1-FB-AP-4-1-S1			separated in the sub-base
E, F ¹⁾	20 20 20 20 20 20 20 20 20 20 20 20 20 2	VMPA14-FB-AP-4-1	14	4 (8/41)	Working ports (2, 4) on the sub-base • Connection sizes MPA14: G1/8, QS6, QS8
EI, FI ¹⁾		VMPA14-FB-AP-4-1-T1			Code I: duct 1 separated in the subbase Code III: duct 1 and duct 3/5
EIII, FIII	1)	VMPA14-FB-AP-4-1-S1			separated in the sub-base
B, D ¹⁾		VMPA2-FB-AP-2-1	20	2 (4/2 ¹⁾)	Working ports (2, 4) on sub-base • Connection sizes MPA2: G1/8, QS6, QS8
BI, DI ¹⁾		VMPA2-FB-AP-2-1-TO			Code I: duct 1 separated in the subbase Code III: duct 1 and duct 3/5
BIII, DIII ¹⁾	*	VMPA2-FB-AP-2-1-SO			separated in the sub-base
Sub-bas	se for pilot air switching valve, fo	or fieldbus connection			
QA		VMPA1-AP-4-EMG-8-S	10	1+3 (2+6/3)	Working ports (2, 4) on the sub-base
		VMPA1-AP-4-EMG-D2-8-S		Pilot air switching valve + valves	Connection sizes: MPA1: M7, QS4, QS6 Including electronics module
QE		VMPA-14-AP-4-EMG-8-S VMPA14-AP-4-EMG-D2-8-S	14	1+3 (2+6/3) Pilot air switching valve + valves	Working ports (2, 4) on sub-base Connection sizes MPA14: G1/8, QS6, QS8 Including electronics module

¹⁾ Only possible with multi-pin plug connection


Sub-base variants					
Code	Illustration	Туре	Width	Number of valve	Information
			[mm]	positions (solenoid coils)	
Sub-base for pilot	air switching valve, for multi-pin plug	connection			
QA		VMPA-1-AP-4-EMM-8-SK VMPA1-AP-4-EMM-8-SL	10	1+3 (2+6/3) Pilot air switching valve + valves	Working ports (2, 4) on the sub-base Connection sizes: MPA1: M7, QS4, QS6 Including electronics module
QE		VMPA14-AP-4-EMM-8-SK VMPA14-AP-4-EMM-8-SL	14	1+3 (2+6/3) Pilot air switching valve + valves	Working ports (2, 4) on sub-base Connection sizes MPA14: G1/8, QS6, QS8 Including electronics module
Sub-base for soft-	start valve, for multi-pin connection				
QR, QS, QT, QU for multi-pin/ fieldbus interface		VMPA-FB-AP-1-P5 VMPA-FB-AP-1-EMG-P5 VMPA-FB-AP-1-EMM-P5-SK VMPA-FB-AP-1-EMM-P5-SL	_	1 soft-start/quick exhaust valve	Pressure supply connection G1/4 1-P5 has no electronic module 1-EMG-P5 has an electronic module for a fieldbus interface 1-EMM-P5-SK has an electronic module for multi-pin plug connection, short link 1-EMM-P5-SL has an electronic module for multi-pin plug connection, long link
Sub-base plate for	soft-start valve, for fieldbus interface				
QR, QS, QT, QU for multi-pin/ fieldbus interface PR, PS, PT, PU for fieldbus interface		VMPA-FB-AP-1-P5 VMPA-FB-AP-1-EMG-P5 VMPA-FB-AP-1-EMM-P5-SK VMPA-FB-AP-1-EMM-P5-SL	_	1 soft-start/quick exhaust valve	Pressure supply connection G1/4 1-P5 has no electronic module 1-EMG-P5 has an electronic module for a fieldbus interface 1-EMM-P5-SK has an electronic module for multi-pin plug connection, short link 1-EMM-P5-SL has an electronic module for multi-pin plug connection, long link

maintained

reached

display

Pressure sensor

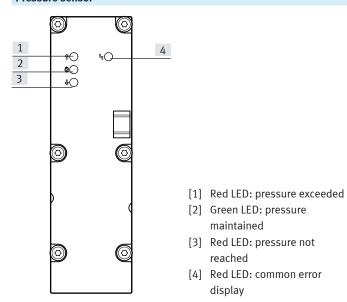

applied pressure exceeds, conforms to or hasn't reached the setpoint value. An additional LED indicates common errors (limit exceeded or not reached). The limits for pressure monitoring are set through parameterisation. The pressure sensor plate can be parameterised via the PLC or the

interface for CPX-FMT.

The pressure sensor uses three

LEDs to indicate whether the

Alternatively, the pressure in the exhaust duct (3/5) and the process pressure (external) can be measured. Pressure measurement in the exhaust duct is used for monitoring the operating pressure during reverse operation (supply to (3/5).

Pressure	Pressure sensor versions							
Code	Illustration	Туре	Use					
PE	See The second s	VMPA-FB-PS-1	Monitoring the operating pressure in duct 1					
PF		VMPA-FB-PS-3/5	Monitoring the pressure in exhaust ducts 3 and 5 (Monitoring the exhaust performance or monitoring the pressure for a reversibly operated valve terminal)					
PG		VMPA-FB-PS-P1	Monitoring an external process pressure					

	l interface versions	I	1	1	T
Code	Illustration	Туре	Width [mm]	Number of valve positions (solenoid coils)	Information
Electroni	cs module for multi-pin plug (N	IPM)			
A, C		VMPA1-MPM-EMM-8 VMPA1-MPM-EMM-4	10	4 (8) 4 (4)	Each solenoid coil is assigned to a specific pin of the multi-pin plug for the valves to be actuated. Regardless of whether valve positions are fitted with cover plates or valves, they are used to control:
E, F		VMPA14-MPM-EMM-8 VMPA14-MPM-EMM-4	14	4 (8) 4 (4)	One address for a single coil Two addresses for a double coil
B, D		VMPA2-MPM-EMM-4 VMPA2-MPM-EMM-2	20	2 (4) 2 (2)	
Electroni	cs module for fieldbus with sta	ndard diagnostics			
А, Н		VMPA1-FB-EMS-8 VMPA1-FB-EMG-8	10	4 (8)	The electronics module includes serial communication and facilitates: Transmission of switching information Actuation of up to 8 solenoid coils Position-based diagnostics
E, H		VMPA14-FB-EMS-8 VMPA14-FB-EMG-8	14	4 (8)	Separate voltage supply for valves Transmission of status, parameter and diagnostic data There are different versions: Without separate circuit
B, QB, H		VMPA2-FB-EMS-4 VMPA2-FB-EMG-4	20	2 (4)	(VMPAFB-EMS) • With separate circuit (VMPAFB-EMG) Diagnostic function: • Fault: valve load voltage
Electroni	cs module for fieldbus with enh	nanced diagnostic function			
А, Н		VMPA1-FB-EMS-D2-8 VMPA1-FB-EMG-D2-8	10	4 (8)	The electronics module with enhanced diagnostic function includes the same functions as the electronics module with standard diagnostics. The diagnostic function is further enhanced:
E, H		VMPA14-FB-EMS-D2-8 VMPA14-FB-EMG-D2-8	14	4 (8)	Fault: valve load voltage Fault: wire break (open load) Fault: short-circuit valve load voltage Message: condition monitoring
B, QB, H		VMPA2-FB-EMS-D2-4 VMPA2-FB-EMG-D2-4	20	2 (4)	



Note

- Multi-pin with modular links
- Sub-bases VMPA1, VMPA14 and VMPA2 can be combined as required
- Positive- or negative-switching control is possible (mixed operation is not permitted)
- Double solenoid valves cannot be mounted on single solenoid electronics modules
- Single solenoid valves can be mounted on double solenoid electronics modules

Electrical	interface versions				
Code	Illustration	Туре	Width [mm]	Number of valve positions (solenoid coils)	Information
Electronic	s module for pilot air switchin	g valve, for fieldbus			
_		VMPA1-FB-EMG-8-S	10	1+3 (2+6/3) Pilot air switching valve + valves	The electronics module includes serial communication and facilitates: Transmission of switching information Actuation of 1 pilot air switching valve plus up to 3 further valves (with max. 6 solenoid coils) Position-based diagnostics Separate voltage supply for valves Transmission of status, parameter and diagnostic data With separate circuit
_		VMPA1-FB-EMG-D2-8-S			The electronics module with enhanced diagnostics function includes the same functions as the electronics module with standard diagnostics. The diagnostics function is further enhanced: • Fault: valve load voltage • Fault: wire break (open load) • Fault: short-circuit valve load voltage • Message: condition monitoring • Actuation of 1 pilot air switching valve plus 3 further valves (with max. 6 solenoid coils)
-		VMPA14-FB-EMG-8-S	14	1+3 (2+6/3) Pilot air switching valve + valves	The electronics module includes serial communication and facilitates: Transmission of switching information Actuation of 1 pilot air switching valve plus up to 3 further valves (with max. 6 solenoid coils) Position-based diagnostics Separate voltage supply for valves Transmission of status, parameter and diagnostic data With separate circuit
-		VMPA14-FB-EMG-D2-8-S			The electronics module with enhanced diagnostics function includes the same functions as the electronics module with standard diagnostics. The diagnostics function is further enhanced: • Fault: valve load voltage • Fault: wire break (open load) • Fault: short-circuit valve load voltage • Message: condition monitoring • Actuation of 1 pilot air switching valve plus 3 further valves (with max. 6 solenoid coils)
Electronic	module for soft-start valve, fo	r multi-pin			
-		VMPA1-MPM-EMM-P5	-	1 Soft-start/quick exhaust valve (2)	Electronic module for actuating a soft-start/ quick exhaust valve via multi-pin
Electronic	: module for soft-start valve, fo	or fieldbus			
-		VMPA1-FB-EMG-P5	-	1 Soft-start/quick exhaust valve (2)	Electronic module for actuating a soft-start/ quick exhaust valve via fieldbus

Supply ar	nd exhaust ports						
Code		Connecti	on	Designation	Code L Push-in connector Large	Code K Push-in connector Small	Code D Thread for supply
S		Internal	pilot air supply, silencer				
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Flat plate silencer	-	-	-
		12/14	Pilot air supply	_	_	_	_
		82/84	Pilot exhaust air	Flat plate silencer	_	_	_
	630		Pressure compensation port	Exhausts via silencer to at	mosphere		
Т		External	pilot air supply, silencer				
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Flat plate silencer	_	_	_
		12/14	Pilot air supply	Push-in fitting	QSM-M7-6-I	QSM-M7-6-I	M7
		82/84	Pilot exhaust air	Flat plate silencer	-	_	_
			Pressure compensation port	Exhausts via silencer to at	mosphere		
V		Internal	pilot air supply, ducted ex	haust air			
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Push-in fitting	QS-10	QS-10	QS-10
		12/14	Pilot air supply	-	_	_	_
		82/84	Pilot exhaust air	Push-in fitting	QSM-M7-6-I	QSM-M7-6-I	M7
			Pressure compensation port	Exhausts into duct 82/84			
Х	-	External	pilot air supply, ducted ex	khaust air			
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Push-in fitting	QS-10	QS-10	QS-10
		12/14	Pilot air supply	Push-in fitting	QSM-M7-6-I	QSM-M7-6-I	M7
		82/84	Pilot exhaust air	Push-in fitting	QSM-M7-6-I	QSM-M7-6-I	M7
			Pressure compensation port	Exhausts into duct 82/84			
Υ		Internal	pilot air supply, ducted ex	haust air via right end plat	e (VMPA-EPR-G)		
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Push-in fitting	QS-10	QS-10	QS-10
		12/14	Pilot air supply		_	_	_
		82/84	Pilot exhaust air	Push-in fitting	QSM-M5-3-I	QSM-M5-3-I	M5
			Pressure compensation port	Exhausts into duct 82/84			
Z	1	External	pilot air supply, ducted ex	khaust air via right end plat	te (VMPA-EPR-G)		
		1	Working air/vacuum supply	Push-in fitting	QS-G1/4-10-I	QS-G1/4-8-I	G1/4
		3/5	Exhaust air	Push-in fitting	QS-10	QS-10	QS-10
		12/14	Pilot air supply	Push-in fitting	QSM-M7-6-I	QSM-M7-6-I	M7
		82/84	Pilot exhaust air	Push-in fitting	QSM-M5-3-I	QSM-M5-3-I	M5
			Pressure compensation port	Exhausts into duct 82/84			

Key features - Mounting

Valve terminal mounting

Sturdy terminal mounting via:


- Four through-holes for wall mounting
- Additional mounting brackets
- DIN rail mounting



Note

When wall mounting valve terminals MPA with more than 4 sub-bases, use additional mounting brackets type VMPA-BG-RW to prevent damaging the valve terminal. The mounting brackets can be mounted on the pneumatic supply plates.


Wall mounting - Multi-pin plug connection, AS-Interface and CPI connection

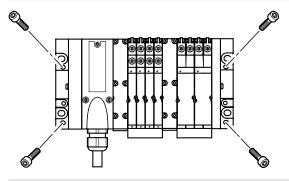


The MPA valve terminal is screwed onto the mounting surface using four M4 or M6 screws. The mounting holes are on the

pneumatic interface and on the right end plate.
Optional mounting brackets are also available.

Wall mounting – Fieldbus connection






The MPA valve terminal is screwed onto the mounting surface using six M4 or M6 screws. The mounting holes are on the left end plate (CPX) and on the right end plate MPA.

The pneumatic interface also provides further mounting holes as well as optional mounting brackets.

DIN rail mounting



The valve terminal MPA is hooked onto the DIN rail a arrow [1]. The valve terminal MPA is then swivelled onto the DIN rail and secured in place with the clamping piece a arrow [2].

The following MPA mounting kit is required for DIN rail mounting of the valve terminal:

• CPX-CPA-BG-NRH
This enables the valve terminal to be mounted on a DIN rail to EN 60715.



Note

More information about mounting solenoid valves on individual sub-bases can be found at

→ VMPA1

Key features – Display and operation

Display and operation

Every solenoid coil is assigned to an LED that indicates its signal status.

- Indicator 12 shows the signal status of the coil for output 2
- Indicator 14 shows the signal status of the coil for output 4

Manual override


The manual override (MO) enables the valve to be switched when not electrically activated or energised.

The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override (code R).


Alternatives:

- The cover cap (code N or as an accessory) prevents the manual override from being locked. The manual override can then only be activated by pushing it.
- The cover cap (code V or as an accessory) can prevent the manual override from being accidentally activated.
- The cover cap (code Y or as an accessory) can be used to operate the manual override in detenting mode without additional tools.

Pneumatic connection and control elements

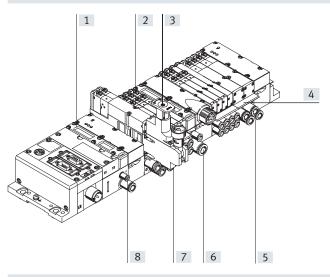

[1] Flat plate silencer for exhaust port 3/5




- [3] Adjusting knob for optional pressure regulator plate
- [4] Inscription label holder for sub-base
- [5] Working ports 2 and 4, per valve position
- [6] Supply port 1
- [7] Pressure gauge (optional)
- [8] Ports 12 and 14 for supplying the external pilot air

- Note

A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

Electrical connection and display components on the AS-Interface

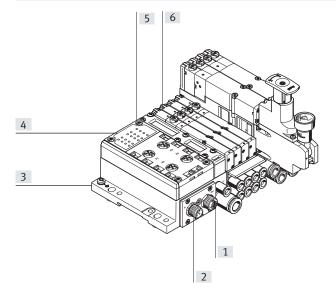


- M12 socket for AS-Interface bus and additional supply (AS-i Out)
- [2] M12 plug for AS-Interface bus and auxiliary power supply (AS-i In)
- [3] Earth connection
- [4] Status LEDs for inputs
- [5] Status LEDs for AS-Interface
- [6] Diagnostic LEDs for valves

Key features - Display and operation

Manual override

MO with automatic return (non-detenting)




 Press in the plunger of the MO with a pointed object or screwdriver.
 The pilot valve switches and actuates the main valve.

[2] Remove the pointed object or

screwdriver.
The spring force pushes the plunger of the manual override back.
The pilot valve returns to its normal position as does the single solenoid main valve (not the case with double solenoid valve code J).

MO with latch (detenting)




- [1] Press in the plunger of the MO with a pointed object or screwdriver until the valve switches and then turn the plunger 90° clockwise until the stop is reached.

 The valve remains in the switching position
- [2] Turn the plunger 90° anticlockwise until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back.

 The valve returns to its normal position (not with double solenoid valve code J).

MO with automatic return (non-detenting)



MO is actuated by pushing it with a pointed object or screwdriver and reset by spring force (detenting position prevented by coded cover cap).

Valves can be ordered with a fitted cover cap in the valve terminal configurator using the selection menu "Manual override" (code N).

MO with latch - Assembly



Turn MO with latch to clip it onto the pilot valve.

The cap for the MO can then be operated (detenting) without tools.

Valves can be ordered with a fitted cover cap in the valve terminal configurator using the selection menu "Manual override" (code N).

MO with latch – Actuation



Sliding the cap for the MO with latch in the direction of the arrow results in:

- Cap locks into the end position
- The pilot valve switches and actuates the main valve.

MO with latch - Actuation




Sliding the cap for the MO with latch in the direction of the arrow results in:

- Cap locks into the end position
- The spring force pushes the plunger of the manual override back.
- The pilot valve returns to its normal position as does the main single solenoid valve (not the case with double solenoid valve code J).

Key features – Display and operation

Inscription system

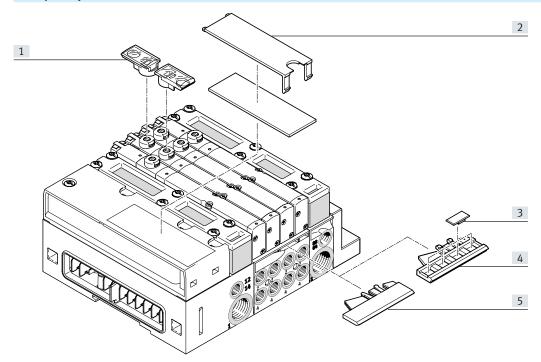

- [1] Inscription label holder ASLR-D-L1
- [2] Inscription label on the flat plate silencer of the pneumatic interface
- [3] Inscription labels IBS-6x10
- [4] Inscription label holder for sub-base VMPA...-ST-2-4, 4-fold, for IBS-6x10 inscription labels
- [5] Inscription label holder for sub-base VMPA...-ST-1-4, transparent, for paper foil labels

To label the valve, an inscription label holder VMPA1-ST-1-4 (for paper foil labels) or VMPA1-ST-2-4 (for inscription labels IBS-6x10) can be mounted on every subbase size 10 or 20.

The sub-base for width 14 is wider. Separate inscription label holders VMPA14-ST-1-4 (for paper labels) or VMPA14-ST-2-4 (for inscription labels IBS-6x10) are therefore available for width 14.

The inscription label holder ASLR-D-L1 can be pushed onto the manual override.
Inscription label holders/inscription labels that can be ordered individually a page 102.

Large inscription labels can be attached to the flat plate silencer as an alternative or in addition to the smaller labels.
Labelling templates can be downloaded from the online portal:

More information: www.festo. com/catalogue/mpa d Support/ Downloads.

Key features – Electrical components

Electrical power as a result of current reduction

Each MPA solenoid coil is protected with a spark arresting protective circuit as well as against polarity reversal. In addition, all valve types have integrated current reduction.

MPA valves are supplied with operating voltage in the range 18 ... 30 V (24 V +/-25%). This high tolerance is made possible by the integrated control electronics and offers additional safety, e.g. in the case of a drop in operating voltage.

Individual valve

Valves on individual sub-bases can also be used for actuators that are further away from the valve terminal.

- Detachable electronics module with integrated holding current reduction
- Electrical M8 connection, 4-pin with screw connection

- Note

More information about the individual valve interface can be found at

→ VMPA1

Electrical multi-pin plug connection

The following multi-pin plug connection is offered for the valve terminal MPA:

 Sub-D multi-pin plug connection (25-pin)

Pin 1 ... 24 are used for addresses 1 ... 24 in order.

If fewer than 24 addresses are used for the valve terminal, the remaining pins to 24 are left free.

Pin 25 is reserved for the neutral conductor.

The valves are switched by positive or negative logic (PNP or NPN). Mixed operation is not permitted.

Each pin on the multi-pin plug can actuate exactly one solenoid coil. If the maximum configurable number of valve positions is 24, this means that 24 valves can be

addressed, each with a single solenoid coil.

With 12 or fewer valve positions, 2 solenoid coils per valve can be addressed. With 12 or more valve positions, the number of available valve positions for valves with two solenoid coils decreases.

· 🖟 - Note

If a single solenoid valve is mounted on a double solenoid valve position, the second address is also occupied and cannot be used.

Guidelines on addressing for valves/solenoid coils

- The maximum possible number of addresses for multi-pin plug connection is 24.
- Each sub-base/electronics module occupies a specific number of addresses/pins:
 - Sub-base MPA1 for 4 single solenoid valves: 4
 - Sub-base MPA1 for 4 double solenoid valves: 8
- Sub-base MPA14 for 4 single solenoid valves: 4
- Sub-base MPA14 for 4 double solenoid valves: 8
- Sub-base MPA2 for 2 single solenoid valves: 2
- Sub-base MPA2 for 2 double solenoid valves: 4
- The addresses are numbered from left to right in ascending order. The following applies for individual valve positions: address x for coil 14 and address x+1 for coil 12.
- If single solenoid valves are mounted on sub-bases for double solenoid valves, the address of coil 12 and the assigned pin will remain unused.

Key features - Electrical components

AS-Interface® fieldbus connection

The AS-Interface allows individual components or small component groups to be widely distributed in terms of space.

The AS-Interface connection of valve terminal MPA-S can be used to control up to 8 solenoid coils. The electrical interface of the valve terminal contains the LEDs that indicate the signal status and

the protective circuit for the valves.

- 🏺 -

Note

More information can be found at

→ Internet: as-interface

Fieldbus connection CPI

All CP valve terminals and CP modules are connected using a ready-to-install CP cable, and are attached to the CP interface.
4 modules, for example one CPV

valve terminal and one to three CP input modules, make up an installation string that ends at the CP interface. The installation system supports a maximum of 4

installation strings that can be connected to a CP bus node.

- 🛔

Note

More information can be found at

→ Internet: cpi

Fieldbus connection CPX

All functions and features of the electrical peripherals CPX are permitted in connection with the CPX interface. This means that:

 The valves and electrical outputs are supplied via the operating voltage connection CPX The valves are supplied and switched off independently via a separate valve connection on the CPX (code V)

- 🛊

Note

More information can be found at

→ Internet: cpx

Fieldbus interface CPX-AP-A

All functions and features of the electrical peripherals CPX-AP-A are permitted in connection with the CPX interface.

This means that:

 The valves and electrical outputs are supplied via the operating voltage connection CPX-AP-A The valves are supplied and switched off independently via a separate valve connection on the CPX-AP-A (code V)

-

Note


More information can be found at

→ Internet: cpx-ap-a

Key features - Electrical components

Pin allocation – Sub-D socket, cable									
	Pin	Address/coil	Wire colour ²⁾		Pin	Address/coil	Wire colour ²⁾		
	1	0	WH		17	16	WH PK		
13(0000000000000)1 25\00000000000000014	2	1	GN		18	17	PK BN		
25(0000000000)14	3	2	YE		19	18	WH BU		
	4	3	GY		20	19	BN BU		
	5	4	PK		21	20	WH RD		
	6	5	BU		22	21	BN RD		
	7	6	RD		23	22	WH BK		
	8	7	VT		24	23	BN		
	9	8	GY PK		25	0 V ¹⁾	ВК		
	10	9	RD BU		- Note The drawing shows a view of the Sub-D				
	11	10	WH GN						
	12	11	BN GN						
	13	12	WH YE						
	14	13	YE BN		socket on the multi-pin plug cable VMPA-				
	15	14	WH GY		KMS1				
	16	15	GY BN		1002 110				

- 1) 0 V with positive-switching control signals; connect 24 V in the case of negative-switching control signals; mixed operation is not permitted!
- 2) To IEC 757

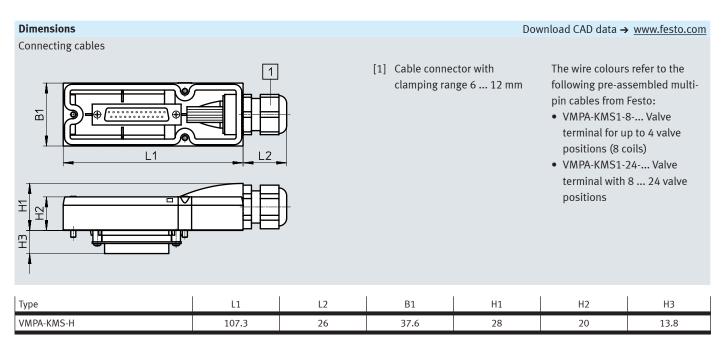

Туре	Casing	Length	Wire x mm ²	D	Weight	Part no.
		[m]		[mm]	[g]	
VMPA-KMS1-8-2.5	PVC	2.5	10 x 0.34	6.9	287	533195
VMPA-KMS2-8-2.5-PUR	PUR	2.5	10 x 0.25	8.3	237	533504
VMPA-KMS1-8-5	PVC	5	10 x 0.34	6.9	510	533196
VMPA-KMS2-8-5-PUR	PUR	5	10 x 0.25	8.3	460	533505
VMPA-KMS1-8-10	PVC	10	10 x 0.34	6.9	956	533197
VMPA-KMS2-8-10-PUR	PUR	10	10 x 0.25	8.3	906	533506
VMPA-KMS1-24-2.5	PVC	2.5	25 x 0.34	11.4	563	533192
VMPA-KMS2-24-2.5-PUR	PUR	2.5	25 x 0.25	11.2	411	533501
VMPA-KMS1-24-5	PVC	5	25 x 0.34	11.4	1062	533193
VMPA-KMS2-24-5-PUR	PUR	5	25 x 0.25	11.2	910	533502
VMPA-KMS1-24-10	PVC	10	25 x 0.34	11.4	2055	533194
VMPA-KMS2-24-10-PUR	PUR	10	25 x 0.25	11.2	1908	533503
VMPA-KMS-H	Hood for self-assem	bly		•	71	533198

Key features – Electrical components

Electrical supply plate

Additional electrical supply plates can be used for larger terminals. This enables up to 64 valve positions/128 solenoid coils to be supplied.

MPA with CPX

Electrical supply plates can be configured at any point upstream or downstream of sub-bases.

An electrical supply plate is required after 8 valve sub-bases.

MPA with CPI connection

Electrical supply plates can be configured at any point upstream or downstream of sub-bases.

An electrical supply plate is required after 8 valve sub-bases.



- Note

For MPA with CPI connection, a maximum of 24 of the 32 MPA1 or MPA14 coils or 12 of the 16 MPA2 coils can be switched on simultaneously.



Note

Please note that only the electronics modules with a separate circuit are permitted to the right of the electrical supply plate.

The electrical supply plate must not be installed directly to the left of a pneumatic supply plate (type VMPA1-FB-SP...).

Electrica	Electrical supply plate						
Code	Illustration	Туре	Information				
L		VMPA-FB-SP-V	Electrical supply plate with M18 plug connection, 3-pin				
		VMPA-FB-SP-7/8-V-5POL	Electrical supply plate with 7/8" plug connection, 5-pin				
		VMPA-FB-SP-7/8-V-4POL	Electrical supply plate with 7/8" plug connection, 4-pin				

Pin allocation for power supply		
,	Pin	Assignment
Pin allocation for M18		
2	2	24 V DC valves
\(\frac{1}{2} + \frac{1}{4}\)	3	0 VDC
4 3	4	FE
Pin allocation for 7/8", 5-pin		
2 1	1	0 V DC valves
3 + + +	2	n.c.
+ + 7	3	FE (leading)
4 5	4	n.c.
	5	24 V DC valves
Pin allocation for 7/8", 4-pin		
C	А	n.c.
\\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	В	24 V DC valves
\tag{\tau} \tau\]	С	FE
B' `A	D	0 V DC valves (leading)

Key features – Electrical components

Instructions for use

Operating materials

Operate your system with unlubricated compressed air, if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life.

The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate the entire system with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the actuator requiring them.

Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal.

Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40°C).

Bio-oils

When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m³ must not be exceeded (see ISO 8573-1 Class 2).

Mineral oils

When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alphaolefins (PAO), the maximum residual oil content of 5 mg/m³ must not be exceeded (see ISO 8573-1 Class 4).

A higher residual oil content is not permitted, regardless of the compressor oil, because the permanent lubrication would otherwise be flushed out over a period of time.

Datasheet – Valve terminal

MPA1: up to 360 l/min MPA14: up to 670 l/min

MPA2: up to 850 l/min


- Repair service

Voltage

24 V DC

- [] - Valve width

MPA1: 10 mm MPA14: 14 mm MPA2: 20 mm

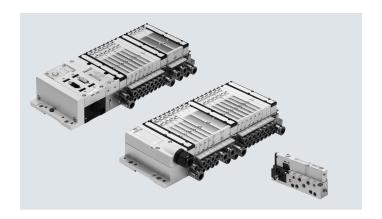

General technical data						
Valve terminal design		Modular, valve sizes	can be mixed			
Electrical control		Fieldbus	Multi-pin plug	AS-i interface	CPI interface	AP interface
Actuation type		Electrical				
Nominal voltage	[V DC]	24				
Operating voltage range	[V DC]	18 30				
Residual ripple	[Vss]	4				
Max. number of valve positions		64 (FB), 24 (MP)				
Valve size	[mm]	10, 14, 20				
Pilot air supply		Internal or external			,	
Lubrication		Life-time lubrication	, PWIS-free (free of pain	t-wetting impairment sub	ostances)	
Type of mounting		Wall mounting				
		On DIN rail to EN 60	715			
Mounting position		Any (wall mounting)				,
		Horizontal only (DIN	rail)			
Manual override		Non-detenting, dete	nting			
Degree of protection to EN 60529		IP67 (for all types of	signal transmission in a	ssembled state)		
Pneumatic connections						
Pneumatic connection		Via sub-base or indiv	vidual connection			
Supply port	1	G1/4 (M7 with indivi	idual sub-base)			
Exhaust port	3/5	QS-10, QS-3/8" (M7	with individual sub-bas	se)		
Working ports	2/4	Dependent on the co	onnection type selected			
		MPA1: M7, QS4, QS6				
		MPA14: G1/8, QS6,				
		MPA2: G1/8, QS6, Q				
Pilot air connection	12/14	M7 (M5 with individu				
Pilot exhaust air port	82/84	,	ual sub-base and with e			
Pressure compensation port			, ,	with individual sub-base	e and with end plate VMF	PA-EPR-G)
	<u> </u>	With flat plate silence	er: exhausting to atmos	phere	<u> </u>	



- Note

Note possible restrictions for the IP protection class a ATEX declaration of conformity

Operating and environment	tal conditions	s
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on operating/ Pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[MPa]	-0.09 1
	[bar]	-0.9 10
Pilot pressure	[MPa]	0.3 0.8
	[bar]	38
Ambient temperature	[°C]	-5 +50
Temperature of medium	[°C]	-5 +50
Storage temperature ¹⁾	[°C]	-20 +40
Relative humidity		Max. 90% at 40 °C
		Non-condensing

¹⁾ Long-term storage

Certifications ¹⁾									
Туре	MPA-MPM-VI (multi-pin plug interface)	MPA-FB-VI (Fieldbus interface with CPX)	MPA-ASI-VI (AS-i interface)	MPA-CPI-VI (CPI interface)	MPA-FB-AP-VI (AP interface)				
Part number	539105	530411	546279	546280	550808				
ATEX category for gas	II 3 G				-				
Type of (ignition) protection for gas	Ex ec IIC T4 Gc X				-				
ATEX ambient temperature [°C]	-5 ≤ Ta ≤ +50				_				
Explosion protection certification	_	EPL Gc (BR)	-	_	_				
outside the EU	_	_	EPL Db (GB)	EPL Db (GB)	_				
	_	_	EPL Gb (GB)	EPL Gb (GB)	_				
CE marking (see declaration of	To EU EMC Directive ²)							
conformity)	To EU Explosion Prot	_							
	To EU RoHS Directive								
UKCA marking (see declaration of	To UK EMC regulation	ns ²⁾							
conformity)	To UK explosion regu	lations			_				
	To UK RoHS regulation	To UK RoHS regulations							
KC marking	KC EMC								
Certification	c UL us - Recognized	(OL)			_				
	RCM	RCM							
Corrosion resistance class CRC ³⁾	1	1	0	0	1				

¹⁾ Interface versions that are not listed do not have any of the listed certifications

²⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


³⁾ More information www.festo.com/x/topic/crc

Pilot pressure p2 as a function of working pressure p1 with external pilot air supply

For valves with code: M, J, B, G, E, W, X

For valves with code: N, K, H, D, I

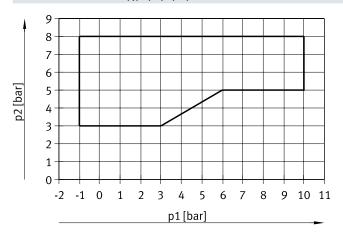


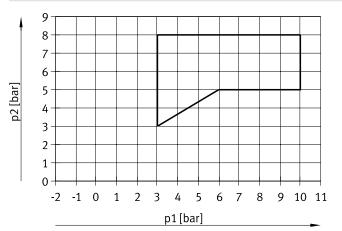


Pilot pressure p2 as a function of working pressure p1 for valves with mechanical spring return


For valve width 10 mm with code: MS, NS, KS, HS, DS $\,$

For valve width 20 mm with code: MS, NS, KS, HS, DS

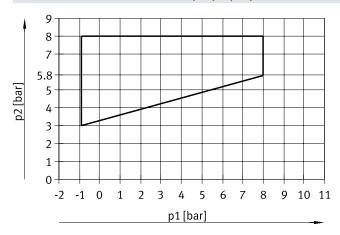

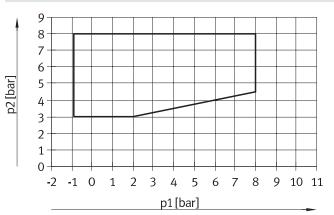


For valve width 10 mm with code: MU, NU, KU, HU

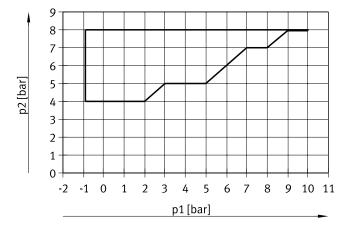

Flow rate qn as a function of output pressure p2 with pressure regulator plates (width 20 mm)

(P regulator plate) for port 1

7 6 5 4 3 2 1 0 0 200 400 600 800 1000 qn [l/min] (B regulator plates) for port 2

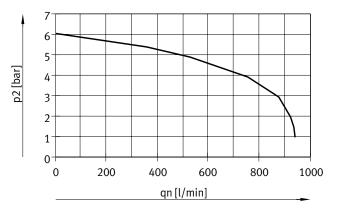


Supply pressure 10 bar, regulated pressure set at 6 bar


Supply pressure 10 bar, regulated pressure set at 6 bar

Flow rate qn as a function of output pressure p2 with pressure regulator plates (width 20 mm)

(A regulator plates) for ports 4

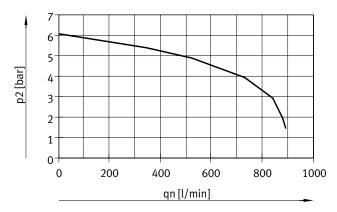

(B regulator plates, rev.) for ports 3, reversible

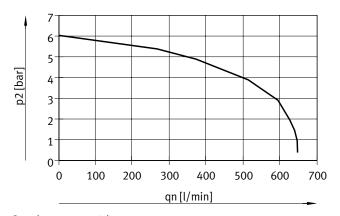


Supply pressure 10 bar, regulated pressure set at 6 bar

Supply pressure 10 bar, regulated pressure set at 6 bar

Flow rate qn as a function of output pressure p2 with pressure regulator plates (width 20 mm)

(A regulator plates, rev.) for ports 5, reversible

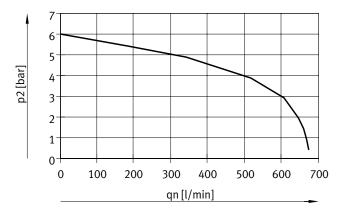

Supply pressure 10 bar, regulated pressure set at 6 bar

Technical data – Valve v	vidth 1	0 mm														
Code			M		J	N	K	Н	В	G	E		Х	W	D	1
Design			Piston spo	ool valve			-	'	-	<u>'</u>					'	
Sealing principle			Soft													
Overlap			Positive o	verlap					-							
Reset method											Pneuma	umatic spring				
Switching times	On	[ms]	11	1 0	10	10	10	10	10	10	10		10	10	10	8
	Off	[ms]	20		_	20	20	20	35	35	35		20	20	20	20
	um	[ms]	_		15	-	_	_	15	15	15	_	_	-	-	1-
Standard nominal flow r	ate	[l/min]	360		360	300	230	300	300	320	24	0	255	255	230	260
Operating pressure		[MPa]	-0.09 +	1		0.3	. 1		-0.09	+1			-0.09	+1	0.3	1
		[bar]	-0.9 +1	0		3 1	0		-0.9 .	+10			-0.9	+10	3 10)
Pilot pressure		[MPa]	0.3 0.8													
,		[bar]	3 8													
Max. tightening torque f	for	[Nm]	0.25													
valve mounting																
Materials			Die-cast a	luminiur	n											
Product weight		[g]	49		56	56	56	56	56	56	56		49	49	56	56
Technical data – Valve v Code Design	vidth 1	0 mm	MS Piston spo	NS ool valve	KS		HS	DS		et valve w		NU ing ret	KU urn	J	ни	
Sealing principle			Soft	_					Soft							
Overlap			Positive o						_	tive overla						
Reset method				Mechanical spring				_	Mechanical spring			1				
Switching times	On	[ms]	10	14			14	14	10	+		10	-+	8 10		
	Off	[ms]	27	16	16		16	16	14			8	10)	10	
	um	[ms]	-	-	-		_	-	-			-	-		-	
Max. switching frequenc		[Hz]	2	-	-			-	-				-		-	
Standard nominal flow r		[l/min]	360	300	230	1	300	230	140			190	16	0	140 19	
Note on standard nomir	nal flow	rate	_					1 → 4	2: 190 l/m i: 140 l/m		_	-		1 → 2: 1 1 → 4: 1	'	
Operating pressure		[MPa]	-0.09 +							+1						
		[bar]	-0.9 +8						-0.9 .	+10						
Pilot pressure		[MPa]	0.4 0.8	_												
		[bar]	4 8													
Max. tightening torque f	for	[Nm]	0.25						0.25							
valve mounting			D: .						D : 6	1.004						
Materials		[_]	Die-cast a	luminiur	n					orced PPA		/ 2	1/2		142	
Product weight		[g]	56					:	35			42	42		42	
Technical data – Pilot a Code	ir switc	hing valve	s, width 10 ES	mm		EU			IS	i			1	U		
Design			Poppet va	lve with	spring re	turn				_					_	
Sealing principle			Soft		, .0.0	· · ·										
Overlap			Negative	overlap												
Reset method			Mechanic													
Operating pressure		[MPa]	0.30.8													
		[bar]	38													
Pilot pressure		[MPa]	0.30.8													
		[bar]	38													
Max. tightening torque f	for	[Nm]	0.65			0.65	<u> </u>		0.	25			(0.65		
valve mounting		£ 114								-				-		
Materials			Reinforce	d PPA												
Product weight		[g]	32													

Valve terminal MPA-S

Technical data – Valve	width 1	4 mm									
Code			M	J	N	K	Н	В			
Design			Piston spool valve								
Sealing principle			Soft								
Overlap			Positive overlap								
Reset method			Pneumatic spring					Mechanical spring			
Switching times	On	[ms]	13	9	12	12	12	16			
	Off	[ms]	30	_	38	38	38	44			
	um	[ms]	_	24	_	_	_	18			
Standard nominal flow	rate	[l/min]	550 670	550 670	550 650	550 600	550 650	550 630			
Note on standard nom	inal flow	rate	MPA-S: 550 l/min	MPA-S: 550 l/min	MPA-S: 550 l/min	MPA-S: 550 l/min	MPA-S: 550 l/min	MPA-S: 550 l/min			
			MPA-L: 670 l/min	MPA-L: 670 l/min	MPA-L: 650 l/min	MPA-L: 600 l/min	MPA-L: 650 l/min	MPA-L: 630 l/min			
Operating pressure		[MPa]	-0.09 +1		0.3 1	-0.09 +1					
		[bar]	-0.9 +10		3 10			-0.9 +10			
Pilot pressure		[MPa]	0.3 0.8		•						
		[bar]	3 8								
Max. tightening torque	e for	[Nm]	0.65								
valve mounting											
Materials			Die-cast aluminium								
Product weight		[g]	77								

Technical data – Valve	width 1	4 mm										
Code			G	E	X	W	D	1				
Design		•	Piston spool valve	Piston spool valve								
Sealing principle			Soft									
Overlap			Positive overlap									
Reset method			Mechanical spring		Pneumatic spring							
Switching times	On	[ms]	13	13	12	12	12	9				
	Off	[ms]	44	44	20	20	30	25				
	um	[ms]	20	18	-	-	_	_				
Standard nominal flow	rate	[l/min]	500 610	420 480	360 400	300 340	550 650	550 670				
Note on standard nomi	nal flow	rate	MPA-S: 500 l/min	MPA-S: 420 l/min	MPA-S: 360 l/min	MPA-S: 340 l/min	MPA-S: 550 l/min	MPA-S: 550 l/min				
			MPA-L: 610 l/min	MPA-L: 480 l/min	MPA-L: 400 l/min	MPA-L: 300 l/min	MPA-L: 650 l/min	MPA-L: 670 l/min				
Operating pressure		[MPa]	-0.09 +1				0.3 1					
		[bar]	-0.9 +10				3 10					
Pilot pressure		[MPa]	0.3 0.8									
		[bar]	38									
Max. tightening torque	for	[Nm]	0.65									
valve mounting												
Materials			Die-cast aluminium									
Product weight		[g]	77									

Technical data – Valve	width 1	.4 mm											
Code			MS	NS	KS	HS	DS						
Design			Piston spool valve										
Sealing principle			Soft	Soft									
Overlap			Positive overlap										
Reset method			Mechanical spring										
Switching times	On	[ms]	13	12	12	12	10						
	Off	[ms]	41	23	23	23	25						
	um	[ms]	_	-	-	-	-						
Max. switching frequen	ıcy	[Hz]	2	-	-	-	-						
Standard nominal flow	rate	[l/min]	550 670	470 520	470 560	470 520	500 570						
Note on standard nomi	nal flow	rate	MPA-S: 550 l/min MPA-L: 670 l/min	MPA-S: 470 l/min MPA-L: 520 l/min	MPA-S: 470 l/min MPA-L: 560 l/min	MPA-S: 470 l/min MPA-L: 520 l/min	MPA-S: 500 l/min MPA-L: 570 l/min						
Operating pressure		[MPa]	-0.09+0.8	MFA-L. 320 I/IIIIII	MFA-L. 300 I/IIIII	MFA-L. 320 (/IIIIII	MIFA-L. 370 I/IIIIII						
o perating pressure		[bar]	-0.9 +8										
Pilot pressure		[MPa]	0.3 0.8										
'		[bar]	38										
Max. tightening torque	for	[Nm]	0.65	0.25									
valve mounting													
Materials			Die-cast aluminium	Die-cast aluminium									
Product weight		[g]	77										

Technical data – Pilot air switching valves, width 14 mm										
Code		ES	EU	IS	IU					
Design		Poppet valve with s	pring return							
Sealing principle		Soft								
Overlap		Negative overlap								
Reset method		Mechanical spring								
Operating pressure	[MPa]	0.30.8								
	[bar]	3 8								
Pilot pressure	[MPa]	0.30.8								
	[bar]	3 8								
Max. tightening torque for	[Nm]	0.25								
valve mounting										
Materials		Reinforced PPA			·					
Product weight	[g]	36								

Technical data – Valve	width 2	0 mm										
Code			M	J	N	K	Н	В				
Design			Piston spool valve									
Sealing principle			Soft	Soft								
Overlap			Positive overlap)								
Reset method			Pneumatic spri	ng				Mechanical spring				
Switching times	On	[ms]	15	9	8	8	8	11				
	Off	[ms]	28	_	28	28	28	46				
	um	[ms]	-	22	_	-	-	23				
Standard nominal flow	v rate	[l/min]	670	670	550 610	500 550	550	510				
Note on standard nom	inal flow	rate	_	_	MPA-S: 550 l/min MPA-L: 610 l/min	MPA-S: 500 l/min MPA-L: 550 l/min	_	-				
Operating pressure		[MPa]	-0.09 +1		0.3 1	0.3 1						
		[bar]	-0.9 +10		3 10			-0.9 +10				
Pilot pressure		[MPa]	0.3 0.8									
		[bar]	38									
Max. tightening torque valve mounting	e for	[Nm]	0.65	0.65								
Materials			Die-cast alumin	Die-cast aluminium								
Product weight		[g]	100									

Technical data – Valv	e width 2	20 mm										
Code			G	E	Х	W	D	I				
Design			Piston spool valve									
Sealing principle			Soft				,					
Overlap			Positive overlap)		,						
Reset method			Mechanical spr	ing	Pneumatic s	pring						
Switching times	On	[ms]	10	11	13	13	7	7				
	Off	[ms]	40	47	22	22	25	25				
	um	[ms]	21	23	_	-	-	-				
Standard nominal flow	v rate	[l/min]	610	590	470	470	650 840	650 850				
Note on standard non	ninal flow	rate	_	-	-	-	MPA-S: 650 l/min MPA-L: 840 l/min	MPA-S: 650 l/min MPA-L: 850 l/min				
Operating pressure		[MPa]	-0.09 +1	-0.09 +1 0.3 1								
		[bar]	-0.9 +10				3 10					
Pilot pressure		[MPa]	0.3 0.8				,					
		[bar]	38									
Max. tightening torqu	e for	[Nm]	0.65									
valve mounting												
Materials			Die-cast aluminium									
Product weight		[g]	100									

Technical data – Valve	width 2	0 mm										
Code			MS	NS	KS	HS	DS					
Design			Piston spool valve									
Sealing principle			Soft	Soft								
Overlap			Positive overlap									
Reset method			Mechanical spring									
Switching times	On	[ms]	8	12	12	12	12					
	Off	[ms]	36	25	25	25	25					
	um	[ms]	-	-	-	-	-					
Max. switching frequen	су	[Hz]	2	-	-	-	-					
Standard nominal flow	rate	[l/min]	670 840	550 620	500	550	650 820					
Note on standard nomi	nal flow	rate	MPA-S: 670 l/min MPA-L: 840 l/min	MPA-S: 550 l/min MPA-L: 620 l/min	_	_	MPA-S: 650 l/min MPA-L: 820 l/min					
Operating pressure		[MPa]	-0.09+0.8	•			,					
		[bar]	-0.9 +8									
Pilot pressure		[MPa]	0.4 0.8									
		[bar]	4 8									
Max. tightening torque	for	[Nm]	0.65									
valve mounting												
Materials			Die-cast aluminium									
Product weight		[g]	100									

Safety data				
	Valve width 10 mm	Valve width 14 mm	Valve width 20 mm	
Max. positive test pulse with [µs] 0 signal	400	400	400	
Max. negative test pulse with [μs] 1 signal	200	200	900	
Shock resistance	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27			
Vibration resistant	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6			

Electrical data – MPA with electronics module VN	1PAFB (CI	1	1	1
		MPA1	MPA14	MPA2
Intrinsic current consumption per electronics mod	dule			
At 24 V _{UEL/SEN} 1)	[mA]	Typically 8		
(internal electronics, all outputs 0-signal)				
At 24 V Uval ²⁾				
(internal electronics, without valves)				
VMPAEMG, separate circuits	[mA]	Typically 23		
VMPAEMS, without separate circuits	[mA]	Typically 3		
Maximum current consumption per solenoid coil	at nominal vo	ltage		
Nominal pick-up current	[mA]	58	58	99
Nominal current following current reduction	[mA]	9	9	18
Time until current reduction	[ms]	24	24	24
Diagnostic message				
Undervoltage _{UOFF} ³⁾	[V]	17.5 16		

Electrical data – MPA with electronics module VMPAMPM (AS-Interface, multi-pin)				
		MPA1	MPA14	MPA2
Current consumption at Sub-D multi-pin plug connection per solenoid coil at nominal voltage				
Nominal pick-up current	[mA]	80	80	100
Nominal current with current reduction	[mA]	25	25	20
Time until current reduction	[ms]	25	25	50

Calculation example for current consumption (CPX terminal, CPI interface)			
Current consumption with two solenoid coils MPA2 switched in parallel and one electronics module VMPAEMS without separate circuits	[mA]	I _{EI/SEN} = 8	
Nominal pick-up current (duration 24 ms)	[mA]	I _{VAL} = 3 (intrinsic current consumption of electronics module) + 2 x 99 (MPA2) = 202	
Nominal current with current reduction (after 24 ms)	[mA]	$I_{VAL} = 3$ ((intrinsic current consumption of electronics module) + 2 x 18 (MPA2) = 39	

Power supply for electronics and sensors
 Load voltage supply for valves
 Load voltage outside of function range

Materials	
Sub-base	Die-cast aluminium
Seals	NBR, elastomer
Supply plate	Die-cast aluminium
End plate, right	Die-cast aluminium
Pneumatic interface, left	Die-cast aluminium, PA
Exhaust air plate	PA
Flat plate silencer	PE
Electrical supply plate	Housing: Die-cast aluminium Cover: Reinforced PA
Electronics module	PA
Electrical link	Bronze/PBT
Regulator plate	Control section, housing: PA; seals: NBR
Note on materials	RoHS-compliant

Product weight			
Approx. weight [g]	MPA1	MPA14	MPA2
Basic weight of sub-base ¹⁾	210 (4 valve positions)	252 (4 valve positions)	210 (2 valve positions)
Individual sub-base (VMPA I C)	92	184	233
Per vacant position L	20	40	45
Right end plate with port 82/84 for ducted exhaust air	55		
(connecting thread M5)			
Right end plate, without port 82/84	58		
Pneumatic interface, left ¹⁾			
With flat plate silencer	315		
With ducted exhaust air	324		
Pneumatic interface CPX-AP-A	207		
Supply plate ¹⁾			
With flat plate silencer	111		
With ducted exhaust air	120		
Electrical supply plate	200		
Regulator plate (MPA1)	73.8		
Regulator plate (MPA2)	180		
QSM-M5-3-I	3		
QSM-M5-5/32-I-U-M	3		
QSM-M5-4-I	4		
QSM-M5-3/16-I-U-M	4		
QSM-M5-6-I	5		
QSM-M5-1/4-I-U-M	5		
QSM-M7-4-I	4		
QSM-M7-3/16-I-U-M	4		
QSM-M7-6-I	5		
QSM-M7-1/4-I-U-M	5		
QS-G1/8-6-I	11		
QS-1/8-1/4-I-U-M QS-G1/8-8-I	11		
QS-U/8-8-1 QS-1/8-5/16-I-U-M	13 13		
QS-1/6-5/16-1-U-IM QS-G1/4-8-I	22		
QS-1/4-5/16-I-U-M	22		
QS-G1/4-10-I	22		
QS-1/4-3/8-I-U-M	22		

¹⁾ With sheet metal seal, inscription label holder, screws

Dimensions Download CAD data → www.festo.com Valve terminal with multi-pin plug connection: 1 19 2 3 4 5 <u>L12</u> 11 12 L10 7 D1 B4 B5 B16 B2 8 9 [1] Solenoid valve MPA1 [6] Working ports [12] Earthing screw Solenoid valve MPA2 [7] DIN rail [19] Vertical stacking MPA1 DIN rail mounting [20] Vertical stacking MPA2 Solenoid valve MPA14 Manual override [9] Mounting holes [5] Supply/exhaust ports [11] Multi-pin plug connection В1 B2 В3 В4 В5 В7 B8 В9 B10 B11 B12 B13 B14 B15 Туре В6 MPA-S (MP) 107.3 178 149.2 128.9 6.6 18 133.8 66.3 33.5 65 23.5 7.5 6.6 4.4 11 Н5 Н6 Н7 Н8 Н9 H10 H11 H13 H14 Type D1 D2 Н1 H2 Н3 Н4 MPA-S (MP) M6 M4 132.3 60.5 59 56 84.9 63.1 23.9 23.1 10.8 9.8 45.1 22.1 20.3 L5¹⁾ L3¹⁾ H16 H17 L1 L6 L7 L8 L9 L10 L11 L12 L13 Type MPA-S (MP) 8.7 8.2 68.9 n x 42 n x 65.5 17.9 20 55.8 6.5 5.6 6.5 9 14.5

L20

5.3

L22

16.7

L14

1.5

L15

13.5

L16

1

L18

21

L19

10.5

Туре

MPA-S (MP)

L23

18

L24

18

L25

7.7

L26

12.7

L27

14.8


L28

14.8


L29

9.1

¹⁾ n = number of sub-bases (with MPA1, width 10 mm and MPA14, width 14 mm, max. 4 valve positions on sub-base; with MPA2, width 20 mm, max. 2 valve positions on sub-base)

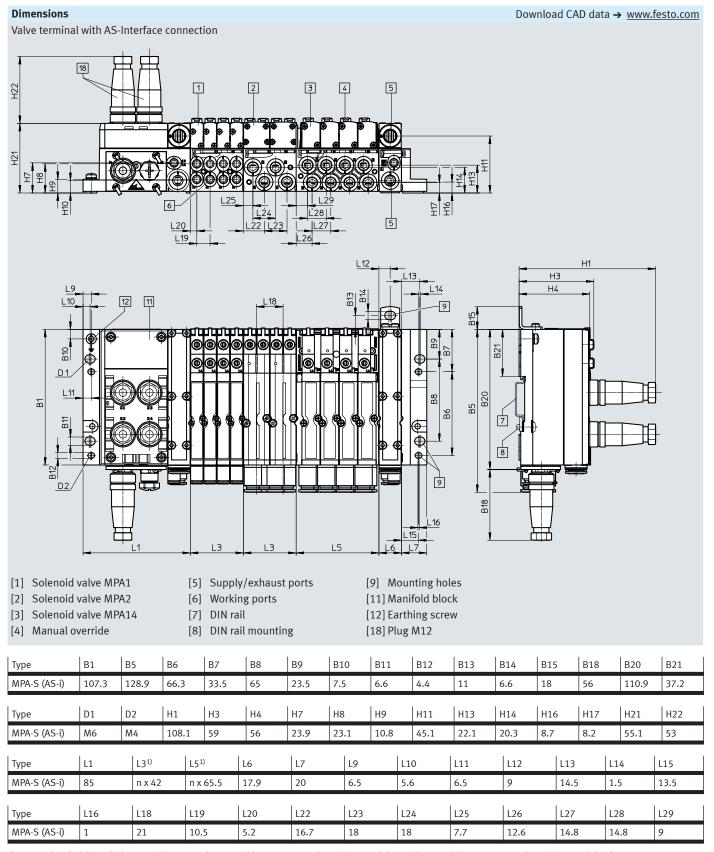

¹⁾ n = number of sub-bases (with MPA1, width 10 mm and MPA14, width 14 mm, max. 4 valve positions on sub-base; with MPA2, width 20 mm, max. 2 valve positions on sub-base)

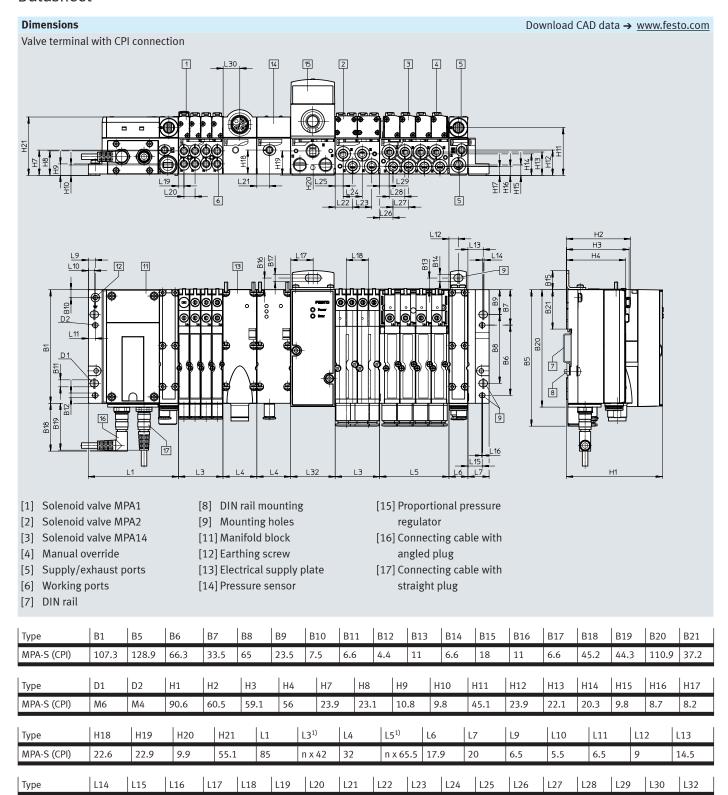

¹⁾ n = number of sub-bases (with MPA1, width 10 mm and MPA14, width 14 mm, max. 4 valve positions on sub-base; with MPA2, width 20 mm, max. 2 valve positions on sub-base)

10.5

11.9

16.6

18

18

7.6

12.6

14.8

14.8

15.8

42

MPA-S (CPI)

1.5

13.5

1

21

21

5.3

Dimensions Download CAD data → www.festo.com Valve terminal with fieldbus interface L12 L13 L33 5 4 D1 B13 B14 B18 B2 Ĺ31 D2 1 1 L8 L3 L3 [1] Solenoid valve MPA1 [8] DIN rail mounting [14] Pressure sensor [2] Solenoid valve MPA2 [9] Mounting holes [15] Proportional pressure [10] Pneumatic interface MPA Solenoid valve MPA14 regulator [3] [11] CPX module [19] Vertical stacking MPA1 [4] Manual override [5] Supply/exhaust ports [12] Earthing screw [20] Vertical stacking MPA2 [6] Working ports [13] Electrical supply plate [7] DIN rail Туре B1 B2 В3 B5 B6 B7 B8 В9 B11 B12 B13 B14 B15 B16 B17 D1 D2 MPA-S (FB) 107.3 178 149.2 129 66.4 33.5 65 23.5 6.6 4.4 11 6.6 18 11 6.6 M6 M4 H2 H5 Н7 Н8 Н9 H10 H11 H12 H13 H14 H16 H17 H18 H19 H20 Type MPA-S (FB) 60.5 132.3 59.1 56 84.9 23.9 23.1 10.8 9.8 45.1 23.9 22.1 20.3 9.8 8.7 8.2 22.6 22.9 9.9 L11) L2 L3²⁾ L4 L5²⁾ L6 L7 L8 L9 L10 L11 L12 L13 L14 L15 L16 Type MPA-S (FB) m x 50.1 51.3 n x 42 32 n x 65.5 17.9 20 30 7.9 6.8 8.5 9 14.5 1.5 13.5 1 L18 L19 L20 L21 L22 L23 L24 L25 L26 L27 L28 L29 L30 L32 117 I 31

21

21

5.3

10.5

11.9

18

18

7.6

12.6

14.8

14.8

9

15.8

16.6

30.4


42

Type


MPA-S (FB)


¹⁾ m = number of CPX modules


²⁾ n = number of sub-bases (with MPA1, width 10 mm and MPA14, width 14 mm, max. 4 valve positions on sub-base; with MPA2, width 20 mm, max. 2 valve positions on sub-base)

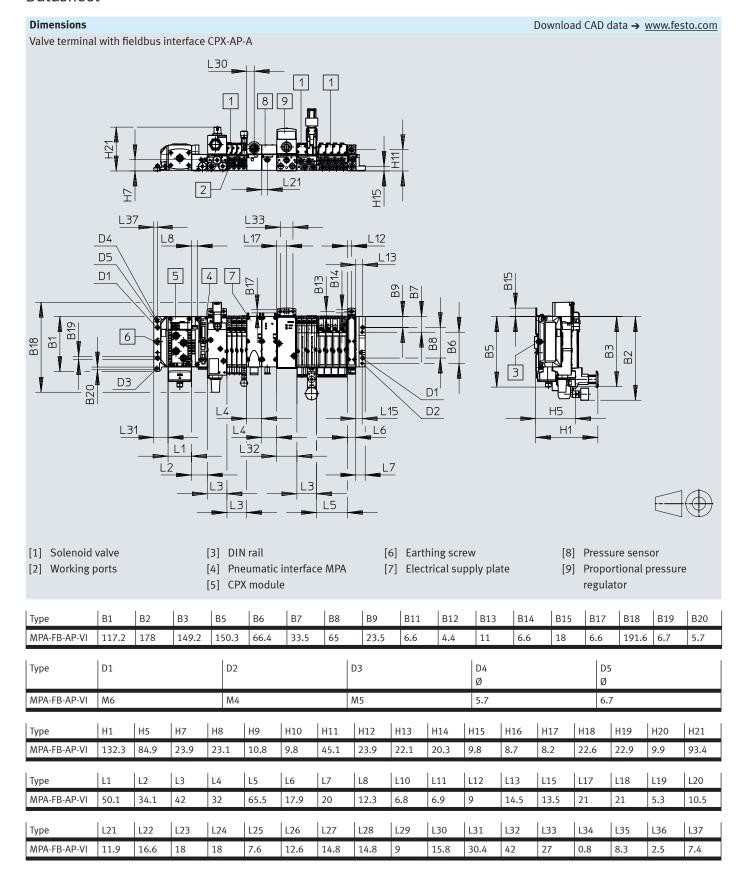

Dimensions Vertical stacking components, regulator plate VMPA1 L1 Type H1 L1 L2 L3

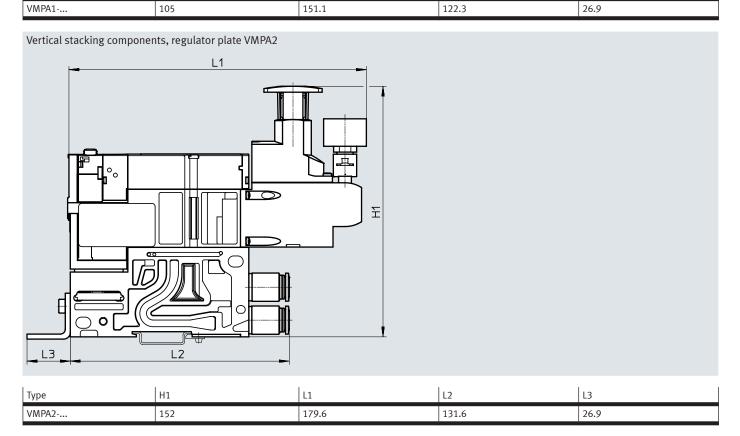





Pressure regulation ranges
0.02 ... 10 bar

- **** - Voltage 21.6 ... 26.4 V DC



General technical data				
			VPPM-6TA	VPPM-8TA
Valve function			3-way proportional pressure regu	lator
Design			Piloted diaphragm regulator	
Application area			For CPI connection, for fieldbus	
Type of mounting			Via through-hole or accessories	
Sealing principle			Soft	
Actuation type			Electrical	
Type of control			Piloted	
Mounting position			Any	
Reset method			Mechanical spring	
Display type			LED	Back-lit LCD
Pneumatic connection	1, 2, 3		Sub-base	
Nominal width	Pressurisation	[mm]	6	8
	Exhausting	[mm]	4.5	7
Standard nominal flow rate	2 bar type	[l/min]	380	450
	6 bar type	[l/min]	900	1050
	10 bar type	[l/min]	1400	1650
Product weight		[g]	400	500
Material	Housing		Anodised wrought aluminium allo	ру

Electrical data				
Electrical connection		Via E-box		
Operating voltage range	[V DC]	21.6 26.4		
Residual ripple	[%]	10		
Max. electrical power consumption	[W]	7		
Duty cycle	[%]	100		
Short circuit current rating		For all electrical connections		
Reverse polarity protection		For all electrical connections		
Degree of protection to EN 60529	·	IP65		





The output pressure will be unregulated if there is a break in the power supply cable.




Note possible restrictions for the IP protection class a ATEX declaration of conformity


Flow rate qn from 1 a 2 as a function of output pressure p2

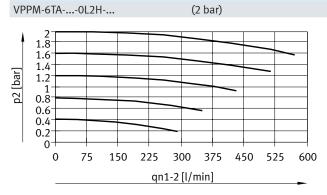


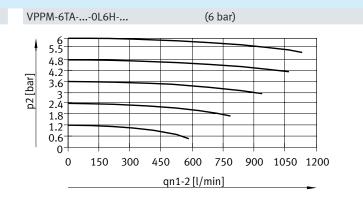


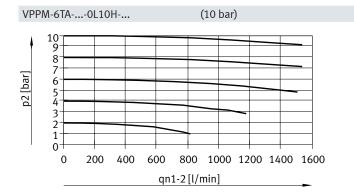


Flow rate qn from 2) a3 as a function of output pressure p2 $\,$

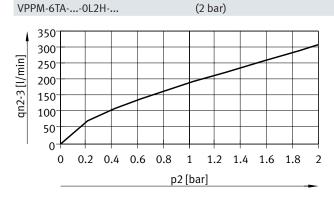


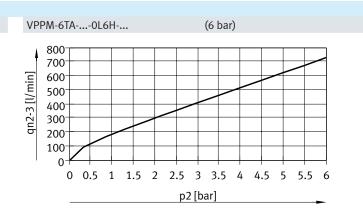


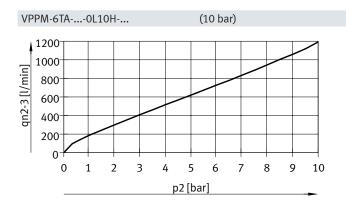


Flow rate qn from 1 a 2 as a function of output pressure p2

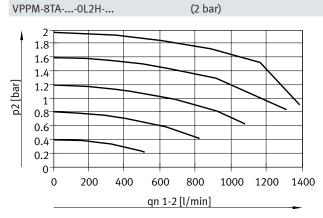


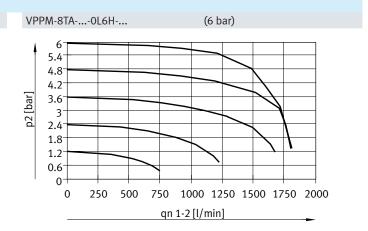


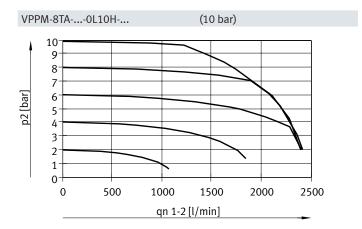

Flow rate qn from 2 a 3 as a function of output pressure p2

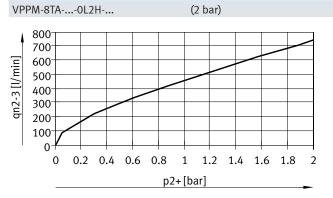

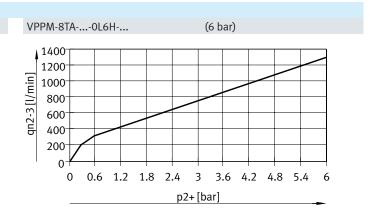

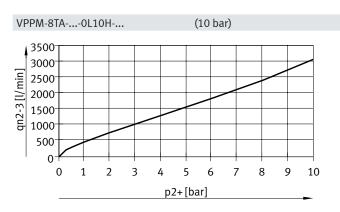


Operating and environmental conditions				
			VPPM-6TA	VPPM-8TA
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]		
			Inert gases	
Note on the operating/pilot medium			Lubricated operation not	possible
Pressure regulation range	VPPM0L2H	[MPa]	0.0020.2	
		[bar]	0.02 2	
	VPPM0L6H	[MPa]	0.006 0.6	
		[bar]	0.06 6	
	VPPM0L10H	[MPa]	0.01 1	
		[bar]	0.1 10	
Input pressure 1 ¹⁾	VPPM0L2H	[MPa]	0 0.4	
		[bar]	0 4	
	VPPM0L6H	[MPa]	0 0.8	
		[bar]	08	
	VPPM0L10H	[MPa]	0 1.1	
		[bar]	0 11	
Max. pressure hysteresis	VPPM0L2H	[bar]	0.01	
	VPPM0L6H	[bar]	0.03	
	VPPM0L10H	[bar]	0.05	
Linearity error FS (full scale)	Standard	[%]	2	
	Type S1	[%]	1	
Repetition accuracy FS (full scale)		[%]	0.5	
Temperature coefficient		[%/K]	0.04	
Ambient temperature		[°C]	0 60	0 50
Temperature of medium		[°C]	10 50	
Corrosion resistance class CRC ²⁾			2	
KC marking			KC EMC	
CE marking (see declaration of conformity) ⁴⁾			To EU EMC Directive ³)	
			To EU RoHS Directive	
UKCA marking (see declaration of conformity) ⁴⁾			To UK EMC regulations ³⁾	
			To UK RoHS regulations	
Certification			RCM	
			c UL us - Listed (OL)	
Certificate-issuing authority			UL E322346	
LABS (PWIS) conformity			VDMA24364-B1/B2-L	


- 1) Input pressure 1 should always be 1 bar greater than the maximum regulated output pressure.
- $2) \quad \hbox{More information www.festo.com/x/topic/crc} \\$
- 3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.


 If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
- 4) More information www.festo.com/catalogue/... → Support/Downloads.

LEDs on the proportional pressure regulator VPPM-6TA



- [1] Green power LED
- [2] Red error LED

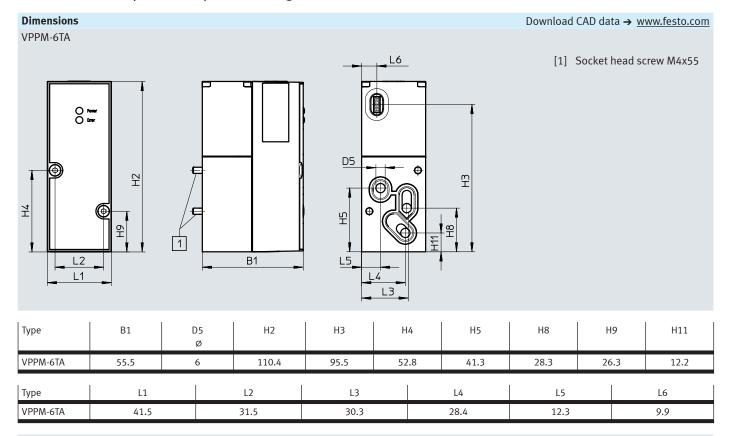

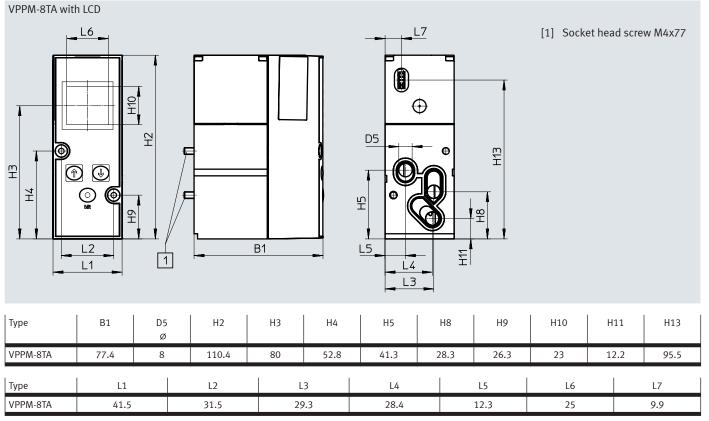


Ordering data	Ordering data					
Code	Overall accuracy [%]	Input pressure 1 [MPa]	Pressure regulation range [MPa]	Part no.	Туре	
QA	2	0 0.4	0.002 0.2	542220	VPPM-6TA-L-1-F-0L2H	
QD	1	0 0.4	0.002 0.2	542217	VPPM-6TA-L-1-F-0L2H-S1	
QB	2	0 0.8	0.006 0.6	542221	VPPM-6TA-L-1-F-0L6H	
QE	1	0 0.8	0.006 0.6	542218	VPPM-6TA-L-1-F-0L6H-S1	
QC	2	0 1.1	0.01 1	542222	VPPM-6TA-L-1-F-0L10H	
QF	1	0 1.1	0.01 1	542219	VPPM-6TA-L-1-F-0L10H-S1	
QL	1	0 0.4	0.002 0.2	572407	VPPM-8TA-L-1-F-0L2H-S1C1	
QG	2	0 0.4	0.002 0.2	572410	VPPM-8TA-L-1-F-0L2H-C1	
QM	1	0 0.8	0.006 0.6	572408	VPPM-8TA-L-1-F-0L6H-S1C1	
QH	2	0 0.8	0.006 0.6	572411	VPPM-8TA-L-1-F-0L6H-C1	
QN	1	0 1.1	0.01 1	572409	VPPM-8TA-L-1-F-0L10H-S1C1	
QK	2	0 1.1	0.01 1	572412	VPPM-8TA-L-1-F-0L10H-C1	


Ordering data – Acces Designation	sories	Part no.	Туре
	Mounting	558844	VMPA-BG
	Sub-base without electrical interlinking module and without electronics module	542223	VMPA-FB-AP-P1
	Cover plate	559638	VMPA-P-RP
	Electrical interlinking module for sub-base of the proportional pressure regulator	537998	VMPA1-FB-EV-AB
	Electronics module	542224	VMPA-FB-EMG-P1

Datasheet - Soft-start valve for MPA-S

Function Without manual override



With manual override





Flow rate
Pressurisation:
3000 l/min
Exhausting:3300 l/min




Module width 41 mm



Temperature range −5 ... +50 °C



Operating pressure 0.2 ... 1 MPa

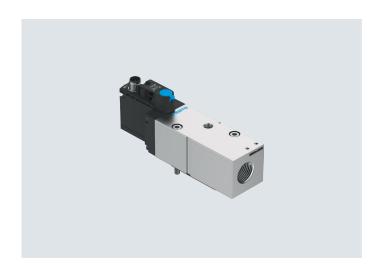

Description

Smart valve functions

The basic functions are the same as with the known soft-start valves.

There is a variant with internal pilot air supply and a variant without internal pilot air supply. In addition, the new smart soft-start valve has:

- An integrated pressure sensor for sensing the exhausted position
- A manual override with protection against unintended actuation, as well as an automatic reset

The purpose of the soft-start valve is to slowly and safely build up the supply pressure in duct 1 of the valve terminal or to quickly exhaust it via duct 1.

Switch-on takes place in two stages:

• First the working pressure for duct 1 gradually increases (the speed can be adjusted using a throttle screw).

 Once the working pressure in duct 1 reaches half the operating pressure, the softstart valve switches to full operating pressure at duct 1 of the valve terminal.

The switching point is

permanently set at 50% of the operating pressure.
The full operating pressure is applied at duct 14 (pilot air) at all times. This pressure causes the valves on the valve terminal to move to the required switching position before pressure is available in duct 1, so an unspecified position is not possible.

Duct 1 of the valve terminal is exhausted via the soft-start valve's exhaust port in the normal position, when the valve is not switched.

A detenting manual override with self-reset via an electrical control signal is available for maintenance and service purposes.

Pressure monitoring

The pilot air switching valve has an M8 plug connection through which the pilot air is monitored by a sensor. The external sensor interface is defined as a digital 24 V interface.

This connection is omitted for a valve terminal with a fieldbus interface, and the signal is transmitted via the internal bus.

Datasheet – Soft-start valve for MPA-S

General technical data		
Design		Piston spool valve
Grid dimension	[mm]	41
Valve size	[mm]	40
Overlap		Negative overlap
Actuation type		Electrical
Sealing principle		Soft
Type of mounting		On sub-base
Mounting position		Any
Valve function		Soft-start and exhaust function
Reset method		Mechanical spring
Type of control		Piloted
Flow direction		Not reversible
Pneumatic port 3		G1/2
Product weight	[g]	466

Standard nominal flow rate [l/min]		
Pressurisation	3000	
Exhausting	3300	

Operating and environmenta	al condition	s				
Туре		VABF-S6-1-P5A4S1PZ	VABF-S6-1-P5A4S1PA	VABF-S6-1-P5A4S2PZ	VABF-S6-1-P5A4S2PA	
Operating medium		Compressed air to ISO 8573	Compressed air to ISO 8573-1:2010 [7:4:4]			
Pilot medium		Compressed air to ISO 8573	3-1:2010 [7:4:4]			
Notes on operating/ pilot medium		Lubricated operation not possible				
Switchover pressure		Not adjustable				
		Switching point between 50	- 75% of operating pressure			
Operating pressure	[MPa]	0.3 1			0.2 1	
	[bar]	3 10			2 10	
Pilot pressure	[MPa]	0.3 0.8	0.3 1		0.2 1	
	[bar]	38	3 10		2 10	
Standard nominal flow rate for pressurisation	[l/min]	3000				
Note pressurisation	[l/min]	VTSA: 3000				
		MPA: 1200				
Standard nominal flow rate for exhausting	[l/min]	3300				
Note exhausting	[l/min]	VTSA: 3300				
		MPA: 1600				
Ambient temperature	[°C]	−5 +50				
Storage temperature	[°C]	-20 +60				
Temperature of medium	[°C]	-5 +50				
Relative humidity	[%]	Max. 90 at 40 °C				
Corrosion resistance class CF	RC ¹⁾	0				
Note on forced checking prod	edure	Switching frequency min. once a month				

¹⁾ More information www.festo.com/x/topic/crc


Safety data		
Max. positive test pulse with logic 0	[µs]	2000
Max. negative test pulse with logic 1	[µs]	1200
Shock resistance		Shock test with severity level 2, to EN 60068-2-27
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6

Datasheet - Soft-start valve for MPA-S

Electrical data for soft-start valve	Fieldbus	Multi-pin plug	
Electrical connection	Plug-in		
Sensor connection	-	Plug	
		3-pin	
		M12x1	
Nominal operating voltage [V]	24 DC		
Characteristic coil data	24 V DC: 1.6 W		
Permissible voltage [%]	±10%	±10%	
fluctuations			
Degree of protection	IP65		
Pressure sensor	Integrated (plug-in)		
Sensor evaluation	Internal	-	
Switching element function	N/C		
Switching position sensing	ing position sensing Via pressure switch, exhausted status		
Signal status indication	Yellow LED, valve control		
	Green LED, pressure switch, exhausted status		
Duty cycle [%]	100		

Materials			
	Fieldbus	Multi-pin plug	
Housing	Wrought aluminium alloy		
Seals	NBR, HNBR		
Screws	Galvanised steel		
Note on materials	RoHS-compliant RoHS-compliant		
LABS (PWIS) conformity	VDMA24364-B1/B2-L	VDMA24364-Zone III	

Connection and display components

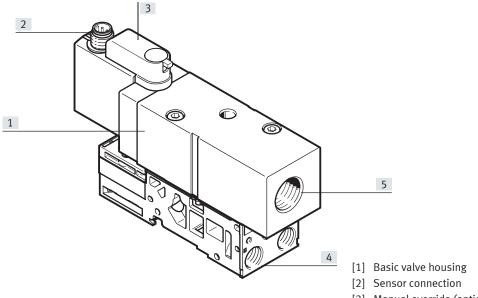

- [3] Manual override (optional)
- [4] Pressure supply, duct 1
- [5] Exhaust air port for duct 3/5


- 🖣 - Note

Detailed information on the options and functionality of the manual override can be found in the user documentation.

Datasheet – Soft-start valve for MPA-S

	ction Circuit symbol	Description
PT QT	(14)4 2(1) 12/14 1 3	With pilot air supply With manual override
PR QR	(14)4 2(1) 12/14 1 3	With pilot air supply Without manual override
PU QU	2(1)	Without pilot air supply With manual override
PS QS	2(1)	Without pilot air supply Without manual override

Datasheet - Soft-start valve for MPA-S

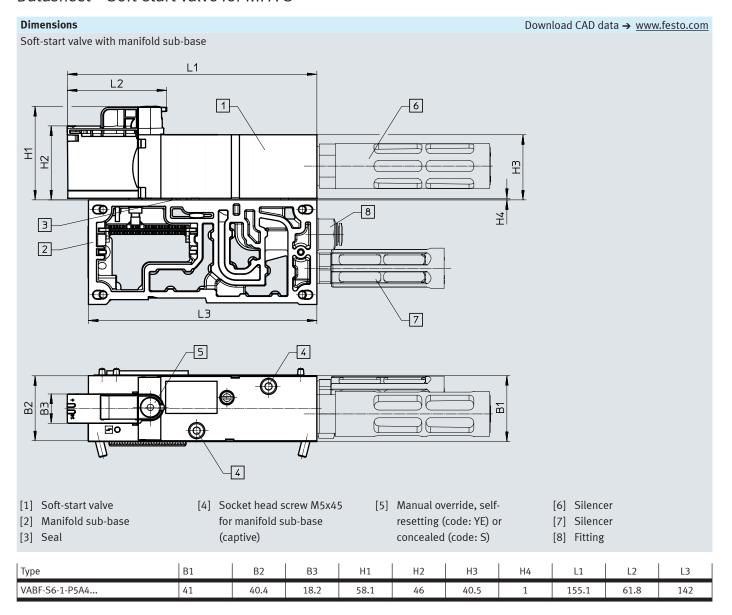

Accessories – Soft-start valve for MPA-S

PA PA	PM PN nulti-pi	Pilot pressure build-up from duct 1 No pilot pressure build-up from duct 1	Manua electric No man Manua electric No man Manua Manua	al override detenting, self-resetting cal control signal nual override al override detenting, self-resetting cal control signal nual override detenting, self-resetting cal control signal nual override detenting, self-resetting cal control signal nual override nual override detenting, self-resetting cal control signal nual override	ng via	8067407 8067411 8067405 8067409 8161609 8161611 8161610 8161608	VABF-S6-1-P5A4S1YE-G12-1T5-PA VABF-S6-1-P5A4S1S-G12-1T5-PA VABF-S6-1-P5A4S2YE-G12-1T5-PA VABF-S6-1-P5A4S2S-G12-1T5-PA VABF-S6-1-P5A4S1YE-G12-1T1L-P VABF-S6-1-P5A4S1S-G12-1T1L-P
PN PN PN	'N nulti-pi 'M	No pilot pressure build-up from duct 1 no pilot pressure build-up from duct 1 pilot pressure build-up from duct 1 No pilot pressure build-up	Manua electric No man Manua electric No man Manua Manua	cal control signal nual override al override detenting, self-resettin cal control signal nual override al override detenting, self-resettin cal control signal nual override nual override nual override nual override	ng via	8067411 8067405 8067409 8161609 8161611 8161610	VABF-S6-1-P5A4S1S-G12-1T5-PA VABF-S6-1-P5A4S2YE-G12-1T5-PA VABF-S6-1-P5A4S2S-G12-1T5-PA VABF-S6-1-P5A4S1YE-G12-1T1L-P VABF-S6-1-P5A4S1S-G12-1T1L-P
I control, mu	nulti-pi 'M	in Pilot pressure build-up from duct 1 No pilot pressure build-up	Manua electric No man Manua electric No man No man Manua	al override detenting, self-resetting cal control signal nual override al override detenting, self-resetting cal control signal nual override nual override nual override nual override detenting, self-resetting	g via	8067405 8067409 8161609 8161611 8161610	VABF-S6-1-P5A4S2YE-G12-1T5-PA VABF-S6-1-P5A4S2S-G12-1T5-PA VABF-S6-1-P5A4S1YE-G12-1T1L-P VABF-S6-1-P5A4S1S-G12-1T1L-P
I control, mu	nulti-pi 'M	in Pilot pressure build-up from duct 1 No pilot pressure build-up	Manua electric No mai No mai	cal control signal nual override Il override detenting, self-resettin cal control signal nual override nual override nual override Il override detenting, self-resettin	g via	8161609 8161611 8161610	VABF-S6-1-P5A4S2S-G12-1T5-PA VABF-S6-1-P5A4S1YE-G12-1T1L-P VABF-S6-1-P5A4S1S-G12-1T1L-P VABF-S6-1-P5A4S2S-G12-1T1L-P
PN	PM	Pilot pressure build-up from duct 1 No pilot pressure build-up	Manua electric No mai No mai Manua	al override detenting, self-resettin cal control signal nual override nual override al override detenting, self-resettin		8161609 8161611 8161610	VABF-S6-1-P5A4S1YE-G12-1T1L-P VABF-S6-1-P5A4S1S-G12-1T1L-P VABF-S6-1-P5A4S2S-G12-1T1L-P
PA PA	PM	Pilot pressure build-up from duct 1 No pilot pressure build-up	electric No mai No mai Manua	cal control signal nual override nual override Il override detenting, self-resettin		8161611 8161610	VABF-S6-1-P5A4S1S-G12-1T1L-P VABF-S6-1-P5A4S2S-G12-1T1L-P
PA PA	PM	Pilot pressure build-up from duct 1 No pilot pressure build-up	electric No mai No mai Manua	cal control signal nual override nual override Il override detenting, self-resettin		8161611 8161610	VABF-S6-1-P5A4S1S-G12-1T1L-P VABF-S6-1-P5A4S2S-G12-1T1L-P
	'N		No mai Manua	nual override Il override detenting, self-resettin	ıg via	8161610	VABF-S6-1-P5A4S2S-G12-1T1L-P
	'N		Manua	ll override detenting, self-resettin	ıg via		
g data – Sub		from duct 1		=	ıg via	9141409	I
g data – Sub				cal control signal		8101008	VABF-S6-1-P5A4S2YE-G12-1T1L-
De	b-base escrip				Weight [g]	Part no.	Туре
se for soft-sta	tart va	lve					
. Wi	Vithout	t electrical interface module		Without electronics module	155	8093454	VMPA-FB-AP-1-P5
Wi	Vith ele	ectrical interlinking module		Electronic module for fieldbus interface	175	8161057	VMPA-FB-AP-1-EMG-P5
Wi	Vith sh	ort electrical interlinking mod	dule	Electronic module for multi-pin connection	175	8161059	VMPA-FB-AP-1-EMM-P5-SK
Wi	Vith lor	ng electrical interlinking mod	ule	Electronic module for multi-pin connection	175	8161060	VMPA-FB-AP-1-EMM-P5-SL
ıg bracket							
					17	8161011	VMPA-BG-P5

Ordering data	ı			1
	Code	Valve function	Part no.	Туре
Individual solenoid va	lve – Width 10 mm			
	5/2-way valve			
	Position function 1-32: M	Single solenoid	533342	VMPA1-M1H-M-PI
	Position function 1-32: MS	Single solenoid, mechanical spring return	571334	VMPA1-M1H-MS-PI
	Position function 1-32: MU	Polymer poppet valve, single solenoid,	553113	VMPA1-M1H-MU-PI
_	D ''' 6 '' 100 I	mechanical spring return	F222/2	VMDA4 M4H I DI
	Position function 1-32: J	Double solenoid	533343	VMPA1-M1H-J-PI
	2x 3/2-way valve Position function 1-32: N	Normally open	533348	VMPA1-M1H-N-PI
	Position function 1-32: NS	Normally open,	556839	VMPA1-M1H-NS-PI
	Fosition function 1-32. No	mechanical spring return	7,007	VMI AI-MIII-NS-II
	Position function 1-32: NU	Polymer poppet valve, normally open, mechanical spring return	553111	VMPA1-M1H-NU-PI
	Position function 1-32: K	Normally closed	533347	VMPA1-M1H-K-PI
	Position function 1-32: KS	Normally closed	556838	VMPA1-M1H-KS-PI
	1 osition function 1 52. KS	mechanical spring return	3,00,0	VIIII ALE III ALE II
	Position function 1-32: KU	Polymer poppet valve, normally closed, mechanical spring return	553110	VMPA1-M1H-KU-PI
	Position function 1-32: H	1x normally open, 1x normally closed	533349	VMPA1-M1H-H-PI
	Position function 1-32: HS	1x normally open, 1x normally closed,	556840	VMPA1-M1H-HS-PI
		mechanical spring return		
	Position function 1-32: HU	Polymer poppet valve,	553112	VMPA1-M1H-HU-PI
		1x normally open, 1x normally closed,		
	- 1-	mechanical spring return		
	5/3-way valve	And the control of th	F22244	VMPA4 M411 P DI
	Position function 1-32: B	Mid-position pressurised	533344	VMPA1-M1H-B-PI
	Position function 1-32: G	Mid-position closed	533345 533346	VMPA1-M1H-G-PI VMPA1-M1H-E-PI
	Position function 1-32: E 1x 3/2-way valve	Mid-position exhausted	555540	AMLAT-WIH-E-LI
	Position function 1-32: W	Normally open, external compressed air supply	540050	VMPA1-M1H-W-PI
	Position function 1-32: X	Normally closed, external compressed air supply	534415	VMPA1-M1H-X-PI
	2x 2/2-way valve	· · · · · · · · · · · · · · · · · · ·		
	Position function 1-32: D	Normally closed	533350	VMPA1-M1H-D-PI
	Position function 1-32: DS	Normally closed,	556841	VMPA1-M1H-DS-PI
		mechanical spring return		
	Position function 1-32: I	1x normally closed, 1x normally closed, reversible only	543605	VMPA1-M1H-I-PI
Vacant position - Widi	th 10 mm			
	Position function 1-32: L	Cover plate for a valve position, width 10 mm A self-adhesive label is supplied.	533351	VMPA1-RP
		A Sett-autiesive tabet is supplied.		
Pilot air switching val	wo Width 10 mm	1		
EX	Valve positions 0-64	3/2-way pilot air switching valve, internal pilot air supply via	8126790	VMPA1-M1H-IS-PI
	valve positions 0-04	duct 1 of the pressure zone		
		3/2-way pilot air switching valve, external pilot air supply via duct 2 of the manifold block	8126791	VMPA1-M1H-ES-PI
	Valve positions 0-64	3/2-way pilot air switching valve, internal pilot air supply via duct 1 of the pressure zone, with pilot air detection via sensor, external, M8 plug connection	8126792	VMPA1-M1H-IU-PI
		3/2-way pilot air switching valve, external pilot air supply via duct 2 of the manifold block, with pilot air detection via sensor, external, M8 plug connection	8126793	VMPA1-M1H-EU-PI

Valve terminal MPA-S

Ordering data						
	Code	Description			Part no.	Туре
Vertical stacking mod	ules – Width 10 mm					
<u></u>	Pressure regulator 1-32: PF	Pressure regulator	For port 1	0.5 6 bar	564911	VMPA1-B8-R1-M5-06
	Pressure regulator 1-32: PA	plate with fixed		0.5 8.5 bar	564908	VMPA1-B8-R1-M5-10
46	Pressure regulator 1-32: PH	threaded connection	For port 2	2 6 bar	564912	VMPA1-B8-R2-M5-06
or Table	Pressure regulator 1-32: PC	M5		2 8.5 bar	564909	VMPA1-B8-R2-M5-10
	Pressure regulator 1-32: PG		For port 4	2 6 bar	564913	VMPA1-B8-R3-M5-06
	Pressure regulator 1-32: PB			2 8.5 bar	564910	VMPA1-B8-R3-M5-10
	Pressure regulator 1-32: PF	Pressure regulator	For port 1	0.5 6 bar	549052	VMPA1-B8-R1C2-C-06
	Pressure regulator 1-32: PA			0.5 8.5 bar	543339	VMPA1-B8-R1C2-C-10
	Pressure regulator 1-32: PH		For port 2	2 6 bar	549053	VMPA1-B8-R2C2-C-06
	Pressure regulator 1-32: PC	M5		2 8.5 bar	543340	VMPA1-B8-R2C2-C-10
	Pressure regulator 1-32: PG		For port 4	2 6 bar	549054	VMPA1-B8-R3C2-C-06
	Pressure regulator 1-32: PB			2 8.5 bar	543341	VMPA1-B8-R3C2-C-10
	Pressure regulator 1-32: PS	compressed air supply	off plate ecting an individual valv of the valve terminal (o ating pressure 3 8 ban	duct 1 and 12/14	567805	VMPA1-HS
	Pressure gauge 1-32: VE	Screw-in pressure gau pressure regulator pla	0	Unit of measure: bar	132340	MA-15-10-M5
	Pressure gauge 1-32: VD	threaded connection		Unit of measure: psi	132341	MA-15-145-M5-PSI
	Pressure gauge 1-32: VC	Locking push-in fitting plate	with thread M5 for pres	ssure regulator	153291	QSK-M5-4

Ordering data						
	Code	Description		Part no.	Туре	PU ¹⁾
Fixed flow restrictor -	- Width 10 mm					
	Pneumatic port 3, 1-40: V03	Hollow bolt, for controlling the	3.5 5.5 l/min	572544	VMPA-FT-NW0.3-10	10
	Pneumatic port 5, 1-40: Q03	flow of exhaust air				
\bigcup	Pneumatic port 3, 1-40: V05		9 12 l/min	572545	VMPA-FT-NW0.5-10	10
	Pneumatic port 5, 1-40: Q05					
	Pneumatic port 3, 1-40: V07		18 22 l/min	572546	VMPA-FT-NW0.7-10	10
	Pneumatic port 5, 1-40: Q07					
	Pneumatic port 3, 1-40: V10		36 41 l/min	572547	VMPA-FT-NW1.0-10	10
	Pneumatic port 5, 1-40: Q10					
	Pneumatic port 3, 1-40: V12		52 58 l/min	572548	VMPA-FT-NW1.2-10	10
	Pneumatic port 5, 1-40: Q12					
	Pneumatic port 3, 1-40: V15		81 89 l/min	572549	VMPA-FT-NW1.5-10	10
	Pneumatic port 5, 1-40: Q15					
	Pneumatic port 3, 1-40: V17		105 115 l/min	572550	VMPA-FT-NW1.7-10	10
	Pneumatic port 5, 1-40: Q17					
Restrictor set – Width	10 mm					
	-	Fixed flow restrictor, two of each	n size,	572543	VMPA1-FT-NW0.3-1.7	14
		two retainers and one assembly	tool			
Retainer for fixed flow	v restrictor – Width 10 mm					
\bigcirc	_	Retainer for exhaust outlet in th	e sub-base	572542	VMPA1-FTI-10	10

¹⁾ Packaging unit.

Ordering data	Code	Description			Part no.	Туре
ıb-base – Width 10) mm					71
		For multi-pin plug/fieldbus,	Without duct sep	paration	533352	VMPA1-FB-AP-4-1
		four valve positions, no	Duct 1 blocked		538657	VMPA1-FB-AP-4-1-T1
		electrical interlinking	Duct 1 blocked a	nd duct 3/5	555901	VMPA1-FB-AP-4-1-S1
		module	blocked			
b-bases with inte	grated check valve in du	ct 3 and 5 – Width 10 mm				
	-	For multi-pin plug/fieldbus,	Without duct sep	paration	8034547	VMPA1-FB-AP-4-1-RV
		four valve positions, no Duct 1 ble			8034549	VMPA1-FB-AP-4-1-T1-RV
		electrical interlinking module	Duct 1 blocked a	nd duct 3/5	8034551	VMPA1-FB-AP-4-1-S1-RV
7		illodule	blocked			
b-base – includin	g electrical interlinking r	module and electronics modules -	1			
M	-	For fieldbus	Four valve	-	546802	VMPA1-AP-4-1-EMS-8
		Farmenti nice et e	positions		E4/00/	VAADA4 AD 4 4 FAAA4 4
		For multi-pin plug	Four solenoid coils	-	546806	VMPA1-AP-4-1-EMM-4
			Eight	+_	546804	VMPA1-AP-4-1-EMM-8
			solenoid coils	Short link	8157743	VMPA1-AP-4-EMM-8-SK
				Long link	8157744	VMPA1-AP-4-EMM-8-SL
						7 M 7 7 7 4 E M M 0 0 E
ıb-base for pilot a	ir switching valve – inclu	ding electrical interlinking modul	1	modules – Width		
M	-	For fieldbus	Eight solenoid coils	_	8157739	VMPA1-AP-4-EMG-8-S
			Soleliola Colls	_	8157740	VMPA1-AP-4-EMG-D2-8-S
b-base – Width 1) mm					
1	_	For individual connection,	Internal pilot air		533394	VMPA1-IC-AP-1
		without ATEX specification	External pilot air		533395	VMPA1-IC-AP-S-1
		For individual connection,	Internal pilot air		8005149	VMPA1-IC-AP-1-EX1E
00000		with ATEX specification: II 3G Ex nA IIC T4 XGc	External pilot air		8005150	VMPA1-IC-AP-S-1-EX1E
scription label ho	lder for sub-base – Width	10 mm				
	_	For foil Inscription label holder for st label	ub-base, transpare	nt, for paper foil	533362	VMPA1-ST-1-4
					544384	VMPA1-ST-2-4
<u> </u>	-	For IBS				
	-	For IBS Inscription label holder for su	ub-base, 4-fold, for	r IBS 6x10		

Ordering data	Code	Description		Part no.	Туре
Electronics module –	Width 10 mm	·	'	<u>'</u>	
	_	For fieldbus connection, without separate circuit	8 coils	533360	VMPA1-FB-EMS-8
		For fieldbus connection, with separate circuit	8 coils	533361	VMPA1-FB-EMG-8
		For fieldbus interface with separate circuit, for pilot air switching valve	8 coils	8108543	VMPA1-FB-EM-8-S
		For fieldbus connection, with enhanced diagnostic function, without separate circuit	8 coils	543331	VMPA1-FB-EMS-D2-8
		For fieldbus interface, with	8 coils	543333	VMPA1-FB-EMG-D2-8
		enhanced diagnostic function, with separate circuit, for pilot air switching valve		8108545	VMPA1-FB-EMG-D2-8-S
		For multi-pin plug	4 coils	537987	VMPA1-MPM-EMM-4
		connection	8 coils	537988	VMPA1-MPM-EMM-8
lectronic module fo	r soft-start and pilot a	air switching valve			
	-	With plate for the soft-start/ quick exhaust valve	-	8111882	VMPA1-FB-EMG-P5
		With plate for the soft-start/ quick exhaust valve	-	8111881	VMPA1-MPM-EMM-P5

Ordering data					
	Code	Description		Part no.	Туре
Electrical interlinking	module – Width 10 m	ım			
	-	For a multi-pin plug connection and AS-Interface for a sub-	4 coils	537993	VMPA1-MPM-EV-AB-4
		base	8 coils	537994	VMPA1-MPM-EV-AB-8
		For a multi-pin plug connection and AS-Interface for a sub-	4 coils	537995	VMPA1-MPM-EV-ABV-4
		base with pneumatic supply plate (on the left next to the sub-base)	8 coils	537996	VMPA1-MPM-EV-ABV-8
	-	For fieldbus connection and CPI, for sub-bases MPA size 1 an proportional pressure regulator	d 2 and	537998	VMPA1-FB-EV-AB
		For fieldbus connection and CPI for a pneumatic supply plate		537999	VMPA1-FB-EV-V

Ordering data	Code	Valve function	Part no.	Туре
dividual solenoid	l valve – Width 14 mm			
3	5/2-way valve			
	Position function 1-32: M	Single solenoid	573718	VMPA14-M1H-M-PI
	Position function 1-32: MS	Single solenoid, mechanical spring return	573974	VMPA14-M1H-MS-PI
	Position function 1-32: J	Double solenoid	573717	VMPA14-M1H-J-PI
	2x 3/2-way valve			
	Position function 1-32: N	Normally open	573725	VMPA14-M1H-N-PI
	Position function 1-32: NS	Normally open,	575977	VMPA14-M1H-NS-PI
		mechanical spring return		
	Position function 1-32: K	Normally closed	573724	VMPA14-M1H-K-PI
	Position function 1-32: KS	Normally closed,	575976	VMPA14-M1H-KS-PI
		mechanical spring return		
	Position function 1-32: H	1x normally open, 1x normally closed	573726	VMPA14-M1H-H-PI
	Position function 1-32: HS	1x normally open, 1x normally closed,	575979	VMPA14-M1H-HS-PI
		mechanical spring return		
	5/3-way valve			
	Position function 1-32: B	Mid-position pressurised	573719	VMPA14-M1H-B-PI
	Position function 1-32: G	Mid-position closed	573721	VMPA14-M1H-G-PI
	Position function 1-32: E	Mid-position exhausted	573720	VMPA14-M1H-E-PI
	3/2-way valve			
	Position function 1-32: W	Normally open, external compressed air supply	573723	VMPA14-M1H-W-PI
	Position function 1-32: X	Normally closed, external compressed air supply	573722	VMPA14-M1H-X-PI
	2x 2/2-way valve			1
	Position function 1-32: D	Normally closed	573727	VMPA14-M1H-D-PI
	Position function 1-32: DS	Normally closed,	575978	VMPA14-M1H-DS-PI
		mechanical spring return		
	Position function 1-32: I	1x normally closed,	573728	VMPA14-M1H-I-PI
		1x normally closed,		
		reversible only		
acant position – V	Vidth 1/1 mm			
Cant position - v	Position function 1-32: L	Cover plate for a valve position, width 14 mm	573729	VMPA14-RP
	Position function 1-32. E	A self-adhesive label is supplied.	313129	AMILY 14-KI
		A sett danes we take the supplied.		
ilot air switching	valve – Width 14 mm			
	Valve positions 0-64	3/2-way pilot air switching valve, internal pilot air supply via	8126785	VMPA14-M1H-IS-PI
		duct 1 of the pressure zone		
		3/2-way pilot air switching valve, external pilot air supply via	8126786	VMPA14-M1H-ES-PI
		duct 2 of the manifold block		
~				
	Value positions 0.64	2/2 way pilot air quitching value internal milet air a contrata	0136707	VMPA14-M1H-IU-PI
	Valve positions 0-64	3/2-way pilot air switching valve, internal pilot air supply via duct 1 of the pressure zone, with pilot air detection via	8126787	VIVIPA14-WITH-IU-PI
		sensor, external, M8 plug connection		
		3/2-way pilot air switching valve, external pilot air supply via	8126788	VMPA14-M1H-EU-PI
		duct 2 of the manifold block, with pilot air detection via	0120/00	* 141 VI4-141111-FO-L1
	1	aust 2 of the mannota block, with phot an detection via		

Ordering data						
	Code	Description			Part no.	Туре
Vertical stacking mod	ules – Width 14 mm					
. P.	Pressure regulator 1-32: PF	Optional pressure	Pressure regulator for 1	0.5 6 bar	8043342	VMPA14-B8-R1C2-C-06
	Pressure regulator 1-32: PA	gauge possible		0.5 8.5 bar	8043339	VMPA14-B8-R1C2-C-10
	Pressure regulator 1-32: PH		Pressure regulator for 2	2 6 bar	8043343	VMPA14-B8-R2C2-C-06
	Pressure regulator 1-32: PC			2 6 bar	8043340	VMPA14-B8-R2C2-C-10
	Pressure regulator 1-32: PG		Pressure regulator for 4	2 6 bar	8043344	VMPA14-B8-R3C2-C-06
	Pressure regulator 1-32: PB			2 6 bar	8043341	VMPA14-B8-R3C2-C-10
P	Pressure regulator 1-32: PF	_	Pressure regulator for 1	0.5 6 bar	8043518	VMPA14-B8-R1-M5-06
	Pressure regulator 1-32: PA			0.5 8.5 bar	8043515	VMPA14-B8-R1-M5-10
	Pressure regulator 1-32: PH		Pressure regulator for 2	2 6 bar	8043519	VMPA14-B8-R2-M5-06
AND CO	Pressure regulator 1-32: PC			2 6 bar	8043516	VMPA14-B8-R2-M5-10
	Pressure regulator 1-32: PG		Pressure regulator for 4	2 6 bar	8043520	VMPA14-B8-R3-M5-06
	Pressure regulator 1-32: PB			2 6 bar	8043517	VMPA14-B8-R3-M5-10
	Pressure regulator 1-32: PV	Vertical pressure supply plate	Connecting thread	G1/8	8110621	VMPA14-VSP-0
♠	1	With fitting for tubing 6 mm 8110627 VMPA14	VMPA14-VSP-QS6			
			O.D.		VMPA14-VSP-QS8	
				10 mm	8110625	VMPA14-VSP-QS10
				1/4"	8110626	VMPA14-VSP-QS1/4
				5/16"	8110624	VMPA14-VSP-QS5/16
				3/8"	8110623	VMPA14-VSP-QS3/8
	Pressure regulator 1-32: PS	compressed air supp	ut-off plate necting an individual valve ply of the valve terminal (du trating pressure 3 8, inter	ct 1 and 12/14	8110429	VMPA14-HS
	Pressure gauge 1-32: VE	Screw-in pressure ga	auge with M5 thread for	Unit of measure:	132340	MA-15-10-M5
	Pressure gauge 1-32: VD	threaded connection		Unit of measure:	132341	MA-15-145-M5-PSI
	Pressure gauge 1-32: VC	Push-in fitting, self-s plate	ealing, with M5 thread for I	pressure regulator	153291	QSK-M5-4
Check valve – Width 1	4 mm				,	
	-	Check valve for insta (scope of delivery: 10	llation in duct 3 or 5 0 check valves, one assemb	oly tool)	8039820	VMPA14-RV

Valve terminal MPA-S

	Code	Description		Part no.	Type
ub-base – Width 1	l4 mm	;			
	-	For multi-pin plug/fieldbus, four valve positions, no electrical interlinking	Without duct separation	8074666	VMPA14-FB-AP-4-1
		module	Duct 1 blocked	8043928	VMPA14-FB-AP-4-1-T1
			Duct 1 blocked and	8043929	VMPA14-FB-AP-4-1-S1
			duct 3/5 blocked		
ıb-base – includi	ng electrical interlin	king module and electronics modules – Width 14	mm		
_affi		For fieldbus	Four valve positions	8066778	VMPA14-AP-4-1-EMS-8
		For multi-pin plug	Four solenoid coils	8066779	VMPA14-AP-4-1-EMM-4
		Eight solenoid coils	8066780	VMPA14-AP-4-1-EMM-8	
			8157745	VMPA14-AP-4-EMM-8-SK	
			8157746	VMPA14-AP-4-EMM-8-SL	
	For fieldbus Eight sol	Eight solenoid coils	8157741	VMPA14-AP-4-EMG-8-S	
				8157742	VMPA14-AP-4-EMG-D2-8-S
ub-base – Width 1	I4 mm				
M		For individual connection, without	Internal pilot air	8023666	VMPA14-IC-AP-1
		ATEX specification	External pilot air	8023667	VMPA14-IC-AP-S-1
		For individual connection, with ATEX	Internal pilot air	8023668	VMPA14-IC-AP-1-EX1E
		specification: II 3G Ex nA IIC T4 XGc	External pilot air	8023669	VMPA14-IC-AP-S-1-EX1E
nscription label h	older for sub-base –				
A STATE OF THE STA	-	For foil Inscription label holder for sub-base, tr foil label	ansparent, for paper	8085996	VMPA14-ST-1-4
	-	For IBS Inscription label holder for sub-base, 4-	fold, for IBS 6x10	8085997	VMPA14-ST-2-4
	-	Inscription labels, 6 x 10 in frames, pac	k of 64	18576	IBS-6x10

Ordering data					
	Code	Description		Part no.	Туре
lectronics module	– Width 14 mm				
	_	For fieldbus connection, without separate circuit	Eight solenoid coils	8066764	VMPA14-FB-EMS-8
		For fieldbus connection,	Eight solenoid coils	8066765	VMPA14-FB-EMG-8
		with separate circuit		8108547	VMPA14-FB-EMG-8-S
		For fieldbus connection, with enhanced diagnostic function, without separate circuit	Eight solenoid coils	8066766	VMPA14-FB-EMS-D2-8
		For fieldbus connection, with	Eight solenoid coils	8066767	VMPA14-FB-EMG-D2-8
		enhanced diagnostic function, with separate circuit		8108549	VMPA14-FB-EMG-D2-8-S
		For multi-pin plug connection	Four solenoid coils	8066768	VMPA14-MPM-EMM-4
			Eight solenoid coils	8066769	VMPA14-MPM-EMM-8
ectrical interlinki	ng module – Width 1	4 mm			
		For a multi-pin plug connection and	Four solenoid coils	8066770	VMPA14-MPM-EV-AB-4
/ *		AS-Interface for a sub-base	Eight solenoid coils	8066771	VMPA14-MPM-EV-AB-8
		For a multi-pin plug connection and AS-Interface for a sub-base with	Four solenoid coils	8066772	VMPA14-MPM-EV-ABV-4
		pneumatic supply plate (on the left next to the sub-base)	Eight solenoid coils	8066773	VMPA14-MPM-EV-ABV-8
	-	For fieldbus connection and CPI, for su	b-bases MPA size 14	8066774	VMPA14-FB-EV-AB

Valve terminal MPA-S

	Code	Valve function	Part no.	Туре			
al solenoid	valve – Width 20 mm						
	5/2-way valve						
	Position function 1-32: M	Single solenoid	537952	VMPA2-M1H-M-PI			
	Position function 1-32: MS	Single solenoid, mechanical spring return	571333	VMPA2-M1H-MS-PI			
	Position function 1-32: J	Double solenoid	537953	VMPA2-M1H-J-PI			
	2x 3/2-way valve						
	Position function 1-32: N	Normally open	537958	VMPA2-M1H-N-PI			
	Position function 1-32: NS	Normally open, mechanical spring return	568655	VMPA2-M1H-NS-PI			
	Position function 1-32: K	Normally closed	537957	VMPA2-M1H-K-PI			
	Position function 1-32: KS	Normally closed, mechanical spring return	568656	VMPA2-M1H-KS-PI			
	Position function 1-32: H	1x normally open, 1x normally closed	537959	VMPA2-M1H-H-PI			
	Position function 1-32: HS	1x normally open, 1x normally closed, mechanical spring return	568658	VMPA2-M1H-HS-PI			
	5/3-way valve						
	Position function 1-32: B	Mid-position pressurised	537954	VMPA2-M1H-B-PI			
	Position function 1-32: G	Mid-position closed	537955	VMPA2-M1H-G-PI			
	Position function 1-32: E	Mid-position exhausted	537956	VMPA2-M1H-E-PI			
	1x 3/2-way valve						
	Position function 1-32: W	Normally open, external compressed air supply	540051	VMPA2-M1H-W-PI			
	Position function 1-32: X	Normally closed, external compressed air supply	537961	VMPA2-M1H-X-PI			
	2x 2/2-way valve						
	Position function 1-32: D	Normally closed	537960	VMPA2-M1H-D-PI			
	Position function 1-32: DS	Normally closed, mechanical spring return	568657	VMPA2-M1H-DS-PI			
	Position function 1-32: I	1x normally closed, 1x normally closed, reversible only	543703	VMPA2-M1H-I-PI			
sition M	dth 20 mm	*					
osicion – Wi	dth 20 mm	Cover plate for a valve position, width 20 min	E270/2	VMPA2-RP			
	Position function 1-32: L	Cover plate for a valve position, width 20 mm A self-adhesive label is supplied.	537962	VIVIPAZ-KP			

Ordering data						
	Code	Valve function			Part no.	Туре
Vertical stacking mod	lules – Width 20 mm					
A .	Pressure regulator 1-32: PA	Pressure regulator	For port 1	0.5 8.5 bar	543342	VMPA2-B8-R1C2-C-10
	Pressure regulator 1-32: PF	plate		0.5 6 bar	549055	VMPA2-B8-R1C2-C-06
	Pressure regulator 1-32: PC	(with 10 mm cartridge	For port 2	2 8.5 bar	543343	VMPA2-B8-R2C2-C-10
	Pressure regulator 1-32: PH	connection for		2 6 bar	549056	VMPA2-B8-R2C2-C-06
	Pressure regulator 1-32: PB	– pressure gauge) –	For port 4	2 8.5 bar	543344	VMPA2-B8-R3C2-C-10
	Pressure regulator 1-32: PG			2 6 bar	549057	VMPA2-B8-R3C2-C-06
	Pressure regulator 1-32: PL		For port 2, reversible	0.5 8.5 bar	543347	VMPA2-B8-R6C2-C-10
	Pressure regulator 1-32: PN			0.5 6 bar	549113	VMPA2-B8-R6C2-C-06
	Pressure regulator 1-32: PK		For port 4, reversible	0.5 8.5 bar	543348	VMPA2-B8-R7C2-C-10
	Pressure regulator 1-32: PM			0.5 6 bar	549114	VMPA2-B8-R7C2-C-06
	Pressure regulator 1-32: PV	Vertical pressure supply plate	Connecting thread	G1/8	8029486	VMPA2-VSP-0
สนิ			With fitting for tubing	6 mm	8035441	VMPA2-VSP-QS6
			O.D.	8 mm	8029488	VMPA2-VSP-QS8
				10 mm	8029489	VMPA2-VSP-QS10
				1/4"	8035442	VMPA2-VSP-QS1/4
				5/16"	8029491	VMPA2-VSP-QS5/16
	Pressure gauge 1-32: T	Pressure gauge,	Display unit	0 16 bar	543487	PAGN-26-16-P10
		10 mm cartridge	bar/psi	0 10 bar	543488	PAGN-26-10-P10
	_	connection, for	Display unit	0 1.0 MPa	563736	PAGN-26-1M-P10
		pressure regulator plate	МРа	0 1.6 MPa	563735	PAGN-26-1.6M-P10
	Pressure gauge 1-32: VF	Threaded adapter for c	artridge connection 10 m	nm to thread G1/8	565811	QSP10-G1/8
Check valve – Width 2	20 mm					
THE	-	Check valve for installa (scope of delivery: 10 c	tion in duct 3 or 5 heck valves, one assemb	bly tool)	8039821	VMPA2-RV

Ordering data	Code	Description		Part no.	Туре	
ub-base – Width 20		Decomplies.			1,750	
JD-base – Width 20	-	For multi-pin plug/fieldbus, two valve positions, no electrical interlinking		538000	VMPA2-FB-AP-2-1	
		module	separation Duct 1 blocked	538677	VMPA2-FB-AP-2-1-T0	
			Duct 1 blocked and	555902	VMPA2-FB-AP-2-1-S0	
*			duct 3/5 blocked			
h-hases for check	valves – Width 20 m	nm				
D bases for effects		For multi-pin plug/fieldbus, two valve	Without duct	578863	VMPA2-FB-APF-2-1	
		positions, no electrical interlinking	separation	0,,,,,,		
		module	Duct 1 blocked	578864	VMPA2-FB-APF-2-1-T0	
			Duct 1 blocked and	578865	VMPA2-FB-APF-2-1-S0	
4			duct 3/5 blocked			
h hasas with into	arrata d abaali yaliio ii	n duct 2 and E. Wildth 20 mm				
n-nases MILLI IULE	grated theck valve ii	n duct 3 and 5 – Width 20 mm For multi-pin plug/fieldbus, two valve	Without duct	8034548	VMPA2-FB-AP-2-1-RV	
	_	positions, no electrical interlinking	separation	0034348	* MFA2-1 D-AF-2-1-KV	
		module	Duct 1 blocked	8034550	VMPA2-FB-AP-2-1-T0-RV	
		datio	Duct 1 blocked and	8034552	VMPA2-FB-AP-2-1-S0-RV	
			duct 3/5 blocked	0034332	VIII AZ IB AI Z I 30 KV	
			,			
b-base – includin	g electrical interlink	ing module and electronics modules – Width 20				
MI	_	For fieldbus	Two valve positions	546803	VMPA2-AP-2-1-EMS-4	
		For multi-pin plug	Two solenoid coils	546807	VMPA2-AP-2-1-EMM-2	
			Four solenoid coils	546805	VMPA2-AP-2-1-EMM-4	
b-base – Width 20) mm					
<u>প</u> ী	_	For individual connection, without	Internal pilot air	537981	VMPA2-IC-AP-1	
		ATEX specification	External pilot air	537982	VMPA2-IC-AP-S-1	
		For individual connection, with ATEX	Internal pilot air	8005151	VMPA2-IC-AP-1-EX1E	
		specification:	External pilot air	8005152	VMPA2-IC-AP-S-1-EX1E	
O G G		II 3G Ex nA IIC T4 XGc				
scription label ho	der for sub-base – W	Vidth 20 mm				
	-	For foil		533362	VMPA1-ST-1-4	
		Inscription label holder for sub-base, tr foil label	Inscription label holder for sub-base, transparent, for paper			
	-	For IBS Inscription label holder for sub-base, 4	-fold, for IBS 6x10	544384	VMPA1-ST-2-4	
	_	Inscription labels, 6 x 10 in frames, pac	k of 64	18576	IBS-6x10	

Ordering data					
	Code	Description		Part no.	Туре
Electronics module -	Width 20 mm				
	_	For fieldbus connection, without separate circuit	4 coils	537983	VMPA2-FB-EMS-4
		For fieldbus connection, with separate circuit	4 coils	537984	VMPA2-FB-EMG-4
C C C C C C C C C C C C C C C C C C C		For fieldbus connection, with enhanced diagnostic function, without separate circuit	4 coils	543332	VMPA2-FB-EMS-D2-4
		For fieldbus connection, with enhanced diagnostic function, with separate circuit	4 coils	543334	VMPA2-FB-EMG-D2-4
		For multi-pin plug connection	2 coils	537985	VMPA2-MPM-EMM-2
			8 coils	537986	VMPA2-MPM-EMM-4
Electrical interlinkin	g module – Width	1 20 mm			
1	-	For a multi-pin plug connection and AS-Interface for a sub-base	2 coils	537989	VMPA2-MPM-EV-AB-2
			4 coils	537993	VMPA1-MPM-EV-AB-4
		For a multi-pin plug connection and AS-Interface for a	2 coils	537991	VMPA2-MPM-EV-ABV-2
		sub-base with pneumatic supply plate (on the left next to the sub-base)		537995	VMPA1-MPM-EV-ABV-4
	-	For fieldbus connection and CPI, for sub-bases MPA size proportional pressure regulator	1 and 2 and	537998	VMPA1-FB-EV-AB
	For fieldbus connection and CPI for a pneumatic supply I		olate	537999	VMPA1-FB-EV-V

Ordering data						
	Code	Pressure regulation range	Input pressure 1	Full-scale linearity error	Part no.	Туре
Proportional-press	ure regulator					
	QA	0.002 0.2 MPa	0 0.4 MPa	2%	542220	VPPM-6TA-L-1-F-0L2H
	QD	0.002 0.2 MPa	0 0.4 MPa	1%	542217	7 VPPM-6TA-L-1-F-0L2H-S1
	ን QL	0.002 0.2 MPa	0 0.4 MPa	1%	572407	7 VPPM-8TA-L-1-F-0L2H-S1C1
$\{\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ $	QG	0.002 0.2 MPa	0 0.4 MPa	2%	572410	VPPM-8TA-L-1-F-0L2H-C1
	QB	0.006 0.6 MPa	0 0.8 MPa	2%	542221	1 VPPM-6TA-L-1-F-0L6H
	QE	0.006 0.6 MPa	0 0.8 MPa	1%	542218	8 VPPM-6TA-L-1-F-0L6H-S1
•	QM	0.006 0.6 MPa	0 0.8 MPa	1%	572408	S VPPM-8TA-L-1-F-0L6H-S1C1
	QH	0.006 0.6 MPa	0 0.8 MPa	2%	57241:	1 VPPM-8TA-L-1-F-0L6H-C1
	QC	0.01 1 MPa	0 1.1 MPa	2%	542222	2 VPPM-6TA-L-1-F-0L10H
	QF	0.01 1 MPa	0 1.1 MPa	1%	542219	9 VPPM-6TA-L-1-F-0L10H-S1
	QN	0.01 1 MPa	0 1.1 MPa	1%	572409	9 VPPM-8TA-L-1-F-0L10H-S1C1
	QK	0.01 1 MPa	0 1.1 MPa	2%	572412	2 VPPM-8TA-L-1-F-0L10H-C1
		lectrical interlinking modul			809345 816105 816106	7 VMPA-FB-AP-1-EMG-P5 9 VMPA-FB-AP-1-EMM-P5-SK
Electronics module	for proportion	nal pressure regulator				
	-				542224	VMPA-FB-EMG-P1
Ordering data	1 .	1	1	1	ı	I
	Code	Manual override		Operating	Part no.	Туре
				pressure		
				[MPa]		
Soft-start/exhaust			T			
	PN	Detenting, self-resett electrical control sign			8161608	VABF-S6-1-P5A4S2YE-G12-1T1L-PZ
	PM	Detenting, self-resett electrical control sign	-		8161609	VABF-S6-1-P5A4S1YE-G12-1T1L-PZ
	PN	Concealed	Doubl	e 0.2 1	8161610	VABF-S6-1-P5A4S2S-G12-1T1L-PZ

supply Single supply

0.2 ... 1

8161611

VABF-S6-1-P5A4S1S-G12-1T1L-PZ

PM

Concealed

esignation		<u> </u>		Part no.	Туре
d plate and fieldb	us pneumatic interface				
	Right end plate	With port 82/84 for ducted exhaust air (M5 connecting thread)	-	8029133	VMPA-EPR-G
		Without port 82/84	_	533373	VMPA-EPR
S Common of the	Pneumatic interface for electrical terminal CPX	Ducted exhaust air, internal pilot air	For CPX polymer interlinking block	533370	VMPA-FB-EPL-G
			For CPX metal interlinking block	552286	VMPA-FB-EPLM-G
~		Ducted exhaust air, external pilot air	For CPX polymer interlinking block	533369	VMPA-FB-EPL-E
		Flat what a Share a	For CPX metal interlinking block	552285	VMPA-FB-EPLM-E
		Flat plate silencer, internal pilot air	For CPX polymer interlinking block For CPX metal	533372 552288	VMPA-FB-EPL-GU VMPA-FB-EPLM-GU
		Flat plate silencer,	interlinking block For CPX polymer	533371	VMPA-FB-EPL-EU
		external pilot air	interlinking block For CPX metal	552287	VMPA-FB-EPLM-EU
			interlinking block	33220,	
eumatic interface,	fieldbus CPX-AP-A	le		6405151	VANDA AD EST E
	Pneumatic interface for remote I/O system CPX-AP-A	External pilot air Internal pilot air		8137154 8137156	VMPA-AP-EPL-E VMPA-AP-EPL-G
ctrical interface fo					
	4 inputs/4 outputs,	Internal pilot air	Ducted exhaust air	546989	VMPA-ASI-EPL-G-4E4A-Z
	to spec. 2.1		Silencer	546991	VMPA-ASI-EPL-GU-4E4A-Z
		External pilot air	Ducted exhaust air	546988	VMPA-ASI-EPL-E-4E4A-Z
			Silencer	546990	VMPA-ASI-EPL-EU-4E4A-Z
	8 inputs/8 outputs,	Internal pilot air	Ducted exhaust air	546993	VMPA-ASI-EPL-G-8E8A-Z
	to spec. 2.1		Silencer	546995	VMPA-ASI-EPL-GU-8E8A-Z
		External pilot air	Ducted exhaust air	546992	VMPA-ASI-EPL-E-8E8A-Z
~			Silencer	546994	VMPA-ASI-EPL-EU-8E8A-Z
	8 inputs/8 outputs,	Internal pilot air	Ducted exhaust air	573184	VMPA-ASI-EPL-G-8E8A-CE
	to spec. 3.0, expanded addressing range	·	Silencer	573186	VMPA-ASI-EPL-GU-8E8A-CE
		External pilot air	Ducted exhaust air	573183	VMPA-ASI-EPL-E-8E8A-CE
		'	Silencer	573185	VMPA-ASI-EPL-EU-8E8A-CE
nifold block for A	S-Interface				
	Socket M12, 5-pin			195704	CPX-AB-4-M12X2-5POL
	Socket M8, 3-pin			195706	CPX-AB-8-M8-3POL
	Spring-loaded terminals, 32-pin			195708	CPX-AB-8-KL-4POL
	Socket, Sub-D, 25-pin			525676	CPX-AB-1-SUB-BU-25POL
ctrical interface fo				F. 11	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
	External pilot air	Ducted exhaust air Silencer		546983 546985	VMPA-CPI-EPL-E VMPA-CPI-EPL-EU
	Internal pilot air	Ducted exhaust air		546984	VMPA-CPI-EPL-G
20150	,	Silencer		546986	VMPA-CPI-EPL-GU
ctrical interface fo	or multi-pin plug connection				
	External pilot air	Ducted exhaust air		540893	VMPA1-MPM-EPL-E
		Silencer		540895	VMPA1-MPM-EPL-EU
9	Internal pilot air	Ducted exhaust air		540894	VMPA1-MPM-EPL-G
		Silencer		540896	VMPA1-MPM-EPL-GU

Ordering data				
Designation			Part no.	Туре
Electrical supply p	late			
	Plug connection M18, 3-pin		541082	VMPA-FB-SP-V
	Plug connection 7/8", 5-pin		541083	VMPA-FB-SP-7/8-V-5POL
	Plug connection 7/8", 4-pin	541084	VMPA-FB-SP-7/8-V-4POL	
Pressure sensor				
	For monitoring the operating pressure in duct 1			VMPA-FB-PS-1
	For monitoring the pressure in exhaust ducts 3 and 5		541086	VMPA-FB-PS-3/5
	For monitoring an external process pressure			VMPA-FB-PS-P1
Covering				
	Cover plate			VMPA-P-RP
	Cover cap for manual override with coded cover cap, manual override non-detenting (10 pieces)			VMРА-НВТ-В
	Cover cap for manual override, concealed, manual over	ride blocked (pack of 10)	540898	VMPA-HBV-B
	Cover cap for manual override, manual override detenting, can be operated manually without accessories (pack of 10)			VAMC-L1-CD
	Inscription label holder for inscription label and cover for manual override (blocked) (pack of 10)	or signal status indication and	570818	ASLR-D-L1
Seal for sub-base				
Seat 101 Sub-base	MPA with ducted exhaust air	No duct separation	533359	VMPA1-DP
ノジグア		Duct 12/14 separated	8161482	VMPA-1-DP-Y
		Duct 1 separated	533363	VMPA1-DP-P
2h		Duct 3/5 separated	533364	VMPA1-DP-RS
		Duct 1 and 3/5 separated	533365	VMPA1-DP-PRS
		Ducts 1, 3/5 and 12/14 separate	8161481	VMPA1-DP-PRS-Y
	MPA with flat plate silencer	No duct separation	533355	VMPA1-DPU
		Duct 1 separated	533356	VMPA1-DPU-P
		Duct 3/5 separated	533357	VMPA1-DPU-RS
		Duct 1 and 3/5 separated	533358	VMPA1-DPU-PRS

Ordering data				
Designation			Part no.	Туре
Exhaust air plate				
	Ducted exhaust air, with 10 mm push-in connector		533375	VMPA-AP
	Ducted exhaust air, with connector QS-3/8		541629	VMPA-AP-3/8
	Flat plate silencer			VMPA-APU
Supply plate (witho	out exhaust plate)			
	For ducted exhaust air		533354	VMPA1-FB-SP
	For flat plate silencer		533353	VMPA1-FB-SPU
Multi-pin plug conn	ection, electrical			
	Cover without connecting cable, for self-assembly		533198	VMPA-KMS-H
	PVC connecting cable for 8 solenoid coils	2.5 m	533195	VMPA-KMS1-8-2.5
		5 m	533196	VMPA-KMS1-8-5
1900		10 m	533197	VMPA-KMS1-8-10
	PVC connecting cable for 24 solenoid coils	2.5 m	533192	VMPA-KMS1-24-2.5
		5 m	533193	VMPA-KMS1-24-5
		10 m	533194	VMPA-KMS1-24-10
	PUR connecting cable for 8 solenoid coils,	2.5 m	533504	VMPA-KMS2-8-2.5-PUR
	suitable for energy chains	5 m	533505	VMPA-KMS2-8-5-PUR
		10 m	533506	VMPA-KMS2-8-10-PUR
	PUR connecting cable for 24 solenoid coils,	2.5 m	533501	VMPA-KMS2-24-2.5-PUR
	suitable for energy chains	5 m	533502	VMPA-KMS2-24-5-PUR
		10 m	533503	VMPA-KMS2-24-10-PUR
Connecting coble A	S-Interface connection			
Connecting caste, A	Straight socket, M12x1, 5-pin, A-coded Straight plug, M12x1, 4-pin, A-coded	0.5 m	8000208	NEBU-M12G5-K-0.5-M12G4
	Modular system for a choice of connecting cables		-	→ Internet: nebu
Connecting cable, C	PI connection			
	Angled plug, 5-pin	0.25 m	540327	KVI-CP-3-WS-WD-0.25
THE STATE OF THE S	Angled socket, 5-pin	0.5 m	540328	KVI-CP-3-WS-WD-0.5
		2 m	540329	KVI-CP-3-WS-WD-2
_		5 m	540330	KVI-CP-3-WS-WD-5
-		8 m	540331	KVI-CP-3-WS-WD-8
	Straight plug, 5-pin	2 m	540332	KVI-CP-3-GS-GD-2
	Straight socket, 5-pin	5 m	540333	KVI-CP-3-GS-GD-5
M. T.		8 m	540334	KVI-CP-3-GS-GD-8

Ordering data			l a.	ls :	1-	1 =
Designation			Size	Part no.	Туре	PU ¹⁾
Push-in fitting for su	b-base, pneumatic interface, supply pla	te				
	Connecting thread M5 for tubing O.D.	3 mm	Mini	153313	QSM-M5-3-I	10
		4 mm	mm Standard 153315 QSM-M5-4-I	QSM-M5-4-I	10	
			Mini	578370	NPQH-DK-M5-Q4-P10	10
		6 mm	Standard	153317	QSM-M5-6-I	10
			Mini	578371	NPQH-DK-M5-Q6-P10	10
		5/32"	Standard	130593	QSM-M5-5/32-I-U-M	1
		3/16"		183750	QSM-M5-3/16-I-U-M	1
		1/4"		130591	QSM-M5-1/4-I-U-M	50
	Connecting thread M7 for tubing O.D.	4 mm		153319	QSM-M7-4-I	10
		,	Mini	578372	NPQH-DK-M7-Q4-P10	10
		6 mm	Standard	153321	QSM-M7-6-I	10
		0 111111	Standard	132919	QSM-M7-6-I-R-100	100
			Mini	578373	NPQH-DK-M7-Q6-P10	100
		3/16"		183739	QSM-M7-3/16-I-U-M	1
			Standard			
		1/4"		183740	QSM-M7-1/4-I-U-M	50
	Connecting thread G1/8 for tubing	6 mm		186107	QS-G1/8-6-I	10
	O.D.		Mini	578375	NPQH-DK-G18-Q6-P10	10
		8 mm	Standard	186109	QS-G1/8-8-I	10
			Mini	578376	NPQH-DK-G18-Q8-P10	10
		1/4"	Standard	183741	QS-1/8-1/4-I-U-M	1
		5/16"		183742	QS-1/8-5/16-I-U-M	1
	Connecting thread G1/4 for tubing	8 mm		186110	QS-G1/4-8-I	10
	O.D.		Mini	578377	NPQH-DK-G14-Q8-P10	10
		10 mm	Standard	186112	QS-G1/4-10-I	10
			Mini	578378	NPQH-DK-G14-Q10-P10	10
		5/16"	Standard	183743	QS-1/4-5/16-I-U-M	1
		3/8"		183744	QS-1/4-3/8-I-U-M	1
		- / -			C	
Silencer						
	Connecting thread	M5		165003	UC-M5	1
		M7 G1/4		161418	UC-M7	1
				165004	UC-1/4	1
		G1/8			UC-1/8	1
	Push-in sleeve connection	3 mm		165005	UC-QS-3H	1
		4 mm		165006	UC-QS-4H	1
Jan San San San San San San San San San S		6 mm		165007	UC-QS-6H	1
		8 mm		175611	UC-QS-8H	1
		10 mm		526475	UC-QS-10H	1
		1				
Blanking plug						
	M5 thread			3843	B-M5	10
				578404	NPQH-BK-M5-P10	10
<u> </u>	ļ.,_,					
	M7 thread			174309	B-M7	10
				578405	NPQH-BK-M7-P10	10
	G1/8 thread			3568	B-1/8	10
\checkmark				578406	NPQH-BK-G18-P10	10
	G1/4 thread			3569	B-1/4	10
				578407	NPQH-BK-G14-P10	10
Plug						
	Blanking plug for tubing O.D.	4 mm		153267	QSC-4H	10
	Samuel play for tubing O.D.			153268	QSC-6H	10
		6 mm				10
-		8 mm		153269	QSC-8H	
		10 mm		153270	QSC-10H	10
	1	3/16"		564785	QBC-3/16H-U	10
			1/4"			
		1/4"		564786	QBC-1/4H-U	10
				564786 564787	QBC-1/4H-U QBC-5/16H-U	10 10

¹⁾ Packaging unit.

Ordering data			1	1
Designation		Part no.	Туре	
Mounting				
	For DIN rail			CPX-CPA-BG-NRH
000	Mounting (for supply plate)			VMPA-BG-RW
	Mounting (for sub-base for proportional pressure regulator v	alve)	558844	VMPA-BG
	Mounting (for sub-base for soft start/quick exhaust valve)			VMPA-BG-P5
User documentation				
	MPA pneumatic components	German	534240	MPA-S-DE
		English	534241	MPA-S-EN
	Manual – MPA electronic components	German	562112	MPA-Elektronik-DE
	(pneumatic modules, pressure sensors, proportional pressure regulators, etc.)	English	562113	MPA-Electronics-EN