

Valve terminals VTSA

FESTO

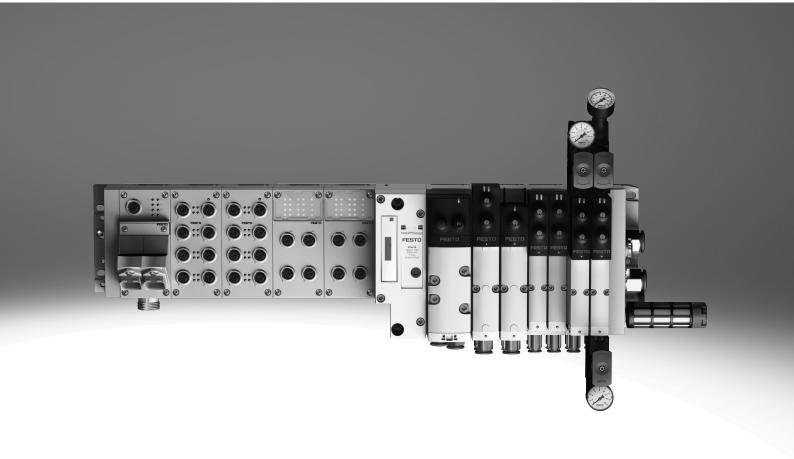

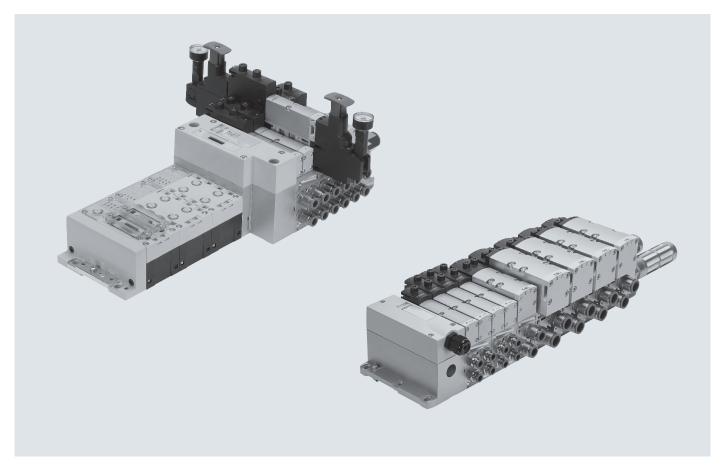

Innovative

- High-performance valves in a sturdy metal housing
- Five valve sizes on one valve terminal
- Standardised from the multipin plug to the fieldbus connection and control block
- Dream team: fieldbus valve terminal suitable for electrical peripherals CPX. This means:
 - Forward-looking internal communication system for actuating the valves and CPX modules
 - Four valve sizes on one valve terminal without adapters
 - Integration of smart valve functions with VTSA-F-CB
- Valve functions for integration in control architectures of higher categories to EN ISO 13849-1

Versatile

- Modular system offering a range of configuration options
- Up to 32 solenoid coils
- Conversions and extensions are possible at any time
- Possible to integrate innovative function modules
- Flexible air supply and variable pressure zones
- Reverse operation
- High pressure range
- -0.9 ... 10 bar, flow rate range 550 ... 4000 l/min
- Wide range of valve functions
- Valves: 24 V DC

Valve terminal VTSA-F-CB


- Serial communication in the pneumatic part
- A maximum of 7 voltage zones (6 of which via PROFIsafe shutoff module and one additional voltage zone via Uval)
- Up to 24 solenoid coils per voltage zone
- Up to 96 valve positions and up to 64 interlinking blocks per valve terminal

Reliable

- Sturdy and durable metal components
 - Valves
- Manifold sub-bases
- Seals
- Fast troubleshooting with LEDs on the valves and diagnostics via fieldbus
- Reliable servicing thanks to valves that can be replaced quickly and easily
- Manual override, either nondetenting, non-detenting/ detenting or concealed
- Durable thanks to tried-andtested piston spool valves
- Large and durable labelling system
- 100% duty cycle

Easy to install

- · Ready-to-install and tested unit
- Reduced selection, ordering, installation and commissioning costs
- Solid wall mounting or DIN rail mounting
- Manifold sub-bases can be extended using four screws, sturdy duct separation on metal support

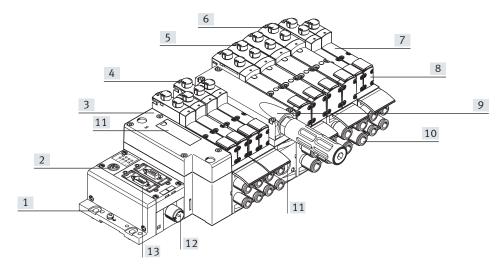

- [1] Quick to mount: directly using screws or DIN rail
- [2] CPX diagnostic interface for handheld devices (channeloriented diagnostics down to the individual valve)
- [3] Pneumatic interface to CPX
- [4] Width 18 mm, 26 mm, 42 mm and 52 mm can be combined on a single valve terminal without adapter
- [5] Reduced downtimes: on-site LED diagnostics
- [6] Safe operation: manual override non-detenting, nondetenting/detenting or concealed
- [7] Versatile: 32 valve positions/32 solenoid coils One valve series for a wide range of flow rates
- [8] Comprehensive range of valve functions
- [9] Modular: air supply plate facilitates the creation of multiple pressure zones as well as numerous additional exhaust and supply ports
- [10] Practical: large connections, flow-optimised ducts, sturdy metal threads or preassembled push-in connections for compressed air tubing with standardised O.D.
- [11] Convenient: large inscription labels
- [12] Reliable: valves, outputs and logic voltage can be switched off separately

- [13] Simple electrical connections
 - Fieldbus interface via CPX
 - Multi-pin plug connection with pre-assembled cable or terminal strip (Cage Clamp[®])
 - Control block via CPX
 - AS-Interface
 - Individual connection
 - IO-Link®
 - I-Port
 - AP interface

Equipment options

Valve functions

- 2x 2/2-way valve, single solenoid, pneumatic spring, normally closed
- 2x 3/2-way valve, single solenoid
 - Normally open
 - Normally open, reversible
 - Normally closed
 - Normally closed, reversible
- 2x 3/2-way valve, single solenoid
 - 1x normally open, 1x normally closed
 - 1x normally open, 1x normally closed, reversible

- 5/2-way solenoid valve
 - Single solenoid, pneumatic spring/mechanical spring
 - Double solenoid
 - Double solenoid with dominant signal
- 5/2-way valves for special functions, single solenoid
 - Mechanical spring
 - Switching position sensing via inductive sensors with PNP or NPN output
 - Protection against unexpected start-up to EN 1037
 - Reversing
- 5/3-way solenoid valve
 - Mid-position pressurised
 - Mid-position closed
 - Mid-position exhausted

- 5/3-way solenoid valve for special functions
 - Switching position 14 is retained (switching position 14 is retained in the event of an emergency off application/power failure), there is no spring return to switching position 12.
 - Only for valve terminal (plug-in)
 - Mid-position exhausted or mid-position 1→2, 4→5
 - Switching position 14 is retained
 - pneumatic spring return

- 5/3-way solenoid valve for special functions
 - Switching position 12 is retained (switching position 12 is retained in the event of an emergency off application/power failure), there is no spring return to switching position 14.
 - Only for valve terminal (plug-in)
 - Mid-position exhausted or mid-position 1→4, 2→3
 - Switching position 12 is retained
 - pneumatic spring return
- Soft-start valve for slow and safe pressure build-up
 - High degree of safety
 - Sensing function provides feedback on switching operation

Connection variants

Individual valve on individual sub-base, plug-in

- Electrical connection via standardised 4-pin M12 plug or via 4-pin spring-loaded terminal for configuration by the user
- Available with internal/external pilot air supply

Individual valve on individual sub-base, square plug or plug-in

- With integrated switching position sensing
- Electrical connection to EN 175301-803 type C (square plug) or
- For configuration by the user via 4-pin spring-loaded terminal
- Cable with open end

Fieldbus interface CPX terminal

- Max. 32 valve positions/max. 32 solenoid coils
- · Any compressed air supply
- Any number of pressure zones

Fieldbus interface CPX terminal with VTSA-F-CB

- · Serial communication in the pneumatic part
- Up to 6 voltage zones for load voltage of the valves in the pneumatic part
- Flexible shutdown of up to 3 voltage zones in the CPX interfaces, either internally with PROFIsafe or externally by 3x M12
- Pilot air switching valve or intermediate plate for switchable pilot air with integrated pressure sensor and connection via internal bus
- Soft-start valve with integrated pressure sensor and connection via internal bus
- Vacuum generator with 3 performance settings, airsaving circuit, optional increased ejection rate (power ejector pulse) and connection via internal bus, parameters can be configured via the CPX system

Valve terminal with individual connection

- Max. 20 valve positions/max. 20 solenoid coils
- Any compressed air supply
- Any number of pressure zones

I-Port

- Max. 16 valve positions/max. 32 solenoid coils
- · Connection to an I-Port master
- · Direct mounting of a bus node

Valve terminal with multi-pin plug connection:

- Max. 32 valve positions/max. 32 solenoid coils
- Parallel, modular valve links

• Max. 16 valve positions/max.

· Connection to an IO-Link master

32 solenoid coils

IO-Link®

- · Any compressed air supply
- Any number of pressure zones

AS-Interface

- 1 to 8 valve positions/max. 8 solenoid coils
- · Soft-start valve for slow and safe pressure build-up

AP interface

- Max. 12 valve positions/max. 24 solenoid coils
- · Connection to an AP bus master

Combinable

- · Width 18 mm: flow rate of VTSA up to 550 l/min, VTSA-F up to 700 l/min
- Width 26 mm: flow rate of VTSA up to 1100 l/min, VTSA-F up to 1350 l/min
- · Width 42 mm: flow rate of VTSA up to 1300 l/min, VTSA-F up to 1860 l/min
- Width 52 mm: valve flow rate up to 2900 l/min
- Width 18 mm, 26 mm, 42 mm, 52 mm can be combined on a single valve terminal (not for VTSA-F-CB)

Valve terminal VTSA complies with

- ISO 15407-2 for width 18 and 26 mm
- ISO 5599-2 for width 42 and 52 mm

Valve terminal configurator General	VTSA	VTSA-F	→ Internet: www.festo.com VTSA-F-CB
A valve terminal configurator is available to help you select a suitable VTSA valve terminal, making it much easier to order the right product. The valve terminals are assembled according to your order	 Valve terminal to ISO 15407-2 and ISO 5599-2 (flow rate: standard). Parallel communication between CPX module and switching valves VTSA 	 Valve terminal, flow rate- optimised (interlinking blocks) (flow rate: increased). Parallel communication between CPX module and switching valves VTSA 	 Valve terminal: optimised in terms of flow rate and communication (flow rate: increased). Serial communication between the CPX module and selected VTSA modules
specification and are individually checked. This reduces assembly and installation time to a minimum.	Order a valve terminal VTSA using the order code: Ordering system for VTSA → Internet: vtsa Ordering system for CPX → Internet: cpx	Order a valve terminal VTSA-F using the order code: Ordering system for VTSA-F → Internet: vtsa-f Ordering system for CPX → Internet: cpx	Order a valve terminal VTSA-F-CB using the order code: Ordering system for VTSA-F-CB → Internet: vtsa-f-cb Ordering system for CPX → Internet: cpx
Ordering data – Product options	Configurable product This product and all its product options can be ordered using the configurator.	The configurator can be found at → www.festo.com/catalogue/ Enter the part number or the type.	Part no. Type 539215 VTSA-MP 547963 VTSA-F-MP 539217 VTSA-FB 8130716 VTSA-FB-AP 547965 VTSA-F-FB 8130719 VTSA-F-FB-AP 555564 VTSA-ASI 555566 VTSA-F-ASI 8073100 VTSA-F-CB 8130722 VTSA-F-CB-AP


Individual pneumatic connection



Valves on individual sub-bases up to width 52 mm can be used with actuators that are further away from the valve terminal.

The electrical connection is established either via a standardised 4-pin M12 plug 24 V DC (EN 61076-2-101), 4-pin spring-loaded terminal or a cable with open end 24 V DC, which are configured by the user.

Valve terminal with individual electrical connection




Control signals from the controller to the valve terminal are transmitted via an individual connecting cable.

The valve terminal can be equipped with a maximum of 20 valves and a maximum 20 solenoid coils.

The electrical connection is established via a 5-pin M12 plug, 24 V DC

Valve terminal with multi-pin plug connection:




Control signals from the controller to the valve terminal are transmitted via a pre-assembled multi-core cable or a multi-pin plug connection assembled by the user (spring-loaded terminal). This substantially reduces installation time.

The valve terminal can be equipped with a maximum of 32 valves and a maximum 32 solenoid coils.

Variants

- Multi-pin plug connection with terminal strip (spring-loaded terminal), 24 V DC
- Pre-assembled connecting cable, 24 V DC
- Sub-D plug connector for assembly by the user, 37-pin, 24 V DC
- Round plug connector M23, 19pin, 24 V DC

AS-Interface connection



A special feature of the AS-Interface is the simultaneous transmission of data and supply power via a two-core cable. The encoded cable profile prevents connection with reverse polarity. The valve terminal with AS-Interface is available in the following versions:

- With one to eight modular valve positions (max. 8 solenoid coils). This corresponds to one to eight valves VSVA.
- With all available valve functions.

The connection technology used for the inputs can be selected as with CPX: M8, M12, Sub-D, spring-loaded terminal (terminals to IP20).

More information


→ Internet: as-interface

· 🖟 - Note

The valve terminal VTSA/VTSA-F with AS-Interface connection is based on the same electrical links as the valve terminal with multi-pin plug connection. This means a valve terminal with multi-pin plug connection can be converted using an AS-Interface module (a page 152). The technical specifications of the AS-Interface system must be observed in this case.

- → Page 73
- → Internet: as-interface

Valve terminal with I-Port/IO-Link® connection




The connection to a higher-order controller can be achieved by:

- Connection to an I-Port master from Festo (e.g. CPX-CTEL)
- Direct mounting of a bus node on the I-Port interface
- Connection to an IO-Link master (in IO-Link® mode)

The valve terminal can comprise a maximum of 32 solenoid coils or 16 valve positions.


Valve terminal with AP interface



Control signals from the controller to the valve terminal are transmitted via the AP bus protocol from Festo.

The valve terminal can comprise a maximum of 24 solenoid coils or 12 valve positions.

Valve terminal with fieldbus interface from the CPX system



An integrated fieldbus node manages the communication connection with a higher-order PLC. This enables a space-saving pneumatic and electrical solution to be implemented.

Valve terminals with fieldbus interfaces from the CPX system can be configured with up to 16 manifold sub-bases. With 2 solenoid coils per connection, up to 32 solenoid coils can thus be actuated.

There is an extended range of functions in combination with the CPX system and the smart valve terminal VTSA-F-CB:

- Serial communication in the pneumatic part
- Several voltage zones for load voltage of the valves in the pneumatic part
- Flexible shutdown of up to 3 voltage zones in the CPX interface, either internally with PROFIsafe or externally by 3x M12
- Flexible zoning for electrical and pneumatic sections, for decentralised control of various system/machine areas


VTSA/VTSA-F versions

- PROFIBUS
- DeviceNet[®]
- CANopen
- CC-LINK®
- EtherNet/IP
- EtherCAT®
- Modbus TCP
- PROFINET
- DOMEDIAN
- POWERLINK
- Sercos III

VTSA-F-CB versions

- PROFIBUS
- EtherNet/IP
- EtherCAT®
- PROFINET
- → Internet: cpx

Valve terminal with control block connection from the CPX system




A controller integrated in the Festo valve terminal enables the construction of stand-alone control units with protection to IP65 without a control cabinet thanks to two different operating modes.

In the slave operating mode, these valve terminals can be used for intelligent preprocessing and are therefore ideal modules for designs using decentralised intelligence. In the master operating mode, terminal groups can be designed with many options and functions that can autonomously control a medium-sized machine/system.

→ Internet: cpx

CP string extension from the CPX system



The optional CP string extension enables additional valve terminals and I/O modules to be connected to the fieldbus node of the CPX terminal on up to 4 CP strings. Different input and output modules as well as valve terminals MPA-S and CPV can be connected.


The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All the required electrical signals are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.

One CP string offers:

- 32 input signals
- 32 output signals for output stages 24 V DC or solenoid coils
- Logic and sensor supply for the input modules
- Load voltage supply for the valve terminals
- Logic supply for the output module
- → Internet: cpi

Key features – Valves

Solenoid valve with switching position sensing for VTSA/VTSA-F/VTSA-F-CB, width 18 mm, 26 mm



The 5/2-way single solenoid valve with spring return features switching position sensing. The normal position of the piston spool is monitored.


It is available as a valve with plugin or individual connection with pilot valves to ISO 15218 and square plug type C.

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC.

It is suitable for use in safetyrelated parts of control systems to EN ISO 13849-1.

→ Page 157

Control block with safety function for VTSA/VTSA-F, width 26 mm



5/2-way solenoid valve These valves are used for special applications, for example for:


- Protection against unexpected start-up
- Safe reversing
- Drives in manually loaded machining jigs

This control block is suitable for use as a press safety valve to EN 962.

This valve is a safety device in accordance with the Machinery Directive 2006/42/EC.

→ Page 167

Intermediate plate for switchable pilot air for VTSA/VTSA-F, width 18 mm, 26 mm



The intermediate plate for switchable pilot air is a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S. It enables the pilot air supply to be verifiably switched on and off (sensing function) from duct 1 to 14 for the entire pressure zone or valve terminal.

Switching position sensing is carried out using an inductive PNP proximity switch with cable and M12x1 push-in connector to EN 61076-2-104.

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. It is suitable for use in safety-related parts of control systems to EN ISO 13849-1.


→ Page 174

- 🖣 - Note

The intermediate plate for switchable pilot air and pilot air can only be operated on the valve terminal VTSA/VTSA-F in combination with a right end plate for external pilot air type VABE-S6-1RZ- Port 14 on the right end plate must then be sealed.

Key features - Valves

Pilot air switching valve for VTSA-F-CB with serial communication



The pilot air switching valve is used for pressurising and exhausting duct 14 for one pressure zone or the entire valve terminal VTSA-F-CB.
In combination with the CPX system, the pilot air switching valve enables additional functions:

- Comprehensive diagnostics
- Transmission of analogue signals
- The elimination of cable connections between the pneumatic and electrical sections

In combination with the CPX system, an integrated pressure sensor and integrated feedback enable wireless detection of the status of the pilot air switching valve.

The pilot air switching valve can be used to implement the safety function "Protection against unexpected start-up".


The pilot air switching valve can

The pilot air switching valve can be supplied with compressed air internally via the valve terminal or externally via duct 2. The hybrid manifold sub-base can be equipped both with an 18 mm and a 26 mm solenoid valve.

This valve is not a safety device to the Machinery Directive 2006/42/EC. It is suitable for use in safetyrelated parts of control systems to EN ISO 13849-1.

→ Page 184

Soft-start valve for VTSA/VTSA-F, module width 43 mm




The soft-start valve is separately electrically actuated, independently of the multi-pin plug connection, AS-Interface or fieldbus interface, via a square plug of type C to EN 175301-803 or optionally via an M12 adapter.

The valve can optionally be ordered with a sensor that monitors switching of the soft-start valve. The soft-start valve can supply the valve terminal or one or more pressure zones with compressed air.

The pressure build-up for each pressure zone is optimised for the application directly at the valve terminal by setting the switch-over pressure and the filling time. A maximum of 5 soft-start valves can thus be integrated on one valve terminal.

→ Page 190

Soft-start valve for VTSA-F-CB with serial communication



The soft-start valve pressurises/ exhausts duct 1 (supply air) of the valve terminal, or one or more pressure zones.

The soft-start valve enables additional functions in combination with the CPX system:

- Comprehensive diagnostics
- Transmission of analogue signals
- The elimination of cable connections between the pneumatic and electrical sections of the CPX/VTSA-F-CB


In combination with the CPX system, an integrated pressure sensor and integrated feedback enable wireless detection of the status of the soft-start valve. The filling time can be adjusted; the switch-over pressure is set to half the operating pressure. The pressure build-up for each pressure zone can thus be optimised for the application directly at the valve terminal.

This valve is not a safety device to the Machinery Directive 2006/42/EC. It is suitable for use in safetyrelated parts of control systems to EN ISO 13849-1.

→ Page 200

Key features – Valves

Vacuum block for VTSA-VTSA-F, module width 53 mm



5/3-way solenoid valve, with switching position 12 retained. The vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm, and thus integrated into the valve terminal VTSA/VTSA-F.

The vacuum block is supplied with power and the vacuum is sensed via a standardised 4-pin M12 plug. The vacuum block is used in conjunction with a suction gripper to pick up, hold and place components. An adjustable ejector pulse is used for setting the components down.

The vacuum block is equipped with an air saving function. If the electrical or pneumatic supply fails, the valve moves to switching position 12 "generate vacuum".

→ Page 211

5/3-way solenoid valve for special functions

For holding, blocking a movement (mechanically)

5/3-way solenoid valve for special functions; port 2 is pressurised, port 4 exhausted. Switching position 14 is retained (code SA) or switching position 12 is retained (code SE).

Possible applications:

- Using lifting cylinders
- Using rotary cylinders


For pressureless switching, self-holding, pneumatic operation

5/3-way solenoid valve for special functions (3 phases). Mid-position is exhausted. Switching position 14 is retained (code SA) or switching position 12 is retained (code SE).

Possible applications:

 Pneumatic manual clamps for devices (inserting stations)

Integrated vacuum generator for VTSA-F-CB with serial communication



The vacuum generator in combination with the CPX/VTSA-F-CB and FMT (Festo Maintenance Tool) offers additional smart functions:

- Opening and saving of up to four records (on a local computer)
- Teach-in functionality: recording homing runs, gripping and holding the workpiece, and setting it down
- Preventive maintenance: measurement of all vacuum times, comparison with the homing run, warning message if a definable level of deviation is reached
- Locking the ejector pulse:
 either when a safety function
 (voltage zone with safe shut-off
 within the valve terminal) is
 requested or when there is a
 fault with the valve load voltage
 (e.g. undervoltage)
- Switching air-saving function on/off
- Changing the vacuum limits per data record

The vacuum generator is used in conjunction with a suction gripper to pick up, hold and place components. An adjustable ejector pulse is used for setting the components down.

→ Page 216

Peripherals

Modular pneumatic peripherals

The modular design of the valve terminal VTSA/VTSA-F/VTSA-F-CB enables great flexibility right from the planning stage and offers maximum ease of service in operation.

The system consists of manifold sub-bases and valves.


The manifold sub-bases are screwed together, thus forming the support system for the valves.

Inside the manifold sub-bases are the connection ducts for supplying compressed air to and exhausting the valve terminal as well as the working ports for the pneumatic cylinders for each valve.


Each manifold sub-base is connected to the next using four screws.

Individual valve terminal sections can be isolated and further blocks easily inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.


Basic system modularity

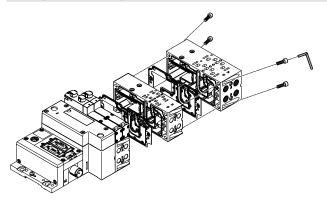

Valve modularity

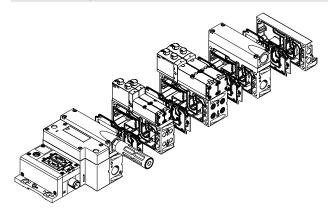

Vertical stacking modularity

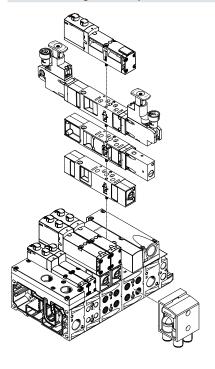

Peripherals

Modular electrical peripherals


How the valves are actuated depends on whether a multi-pin terminal or fieldbus terminal is used.

The VTSA/VTSA-F with CPX interface is based on the internal bus system of the CPX and uses this communication system for all solenoid coils and a range of electrical input and output functions.


Parallel links enable the following:

- Transmission of switching information
- Compact design
- Position-based diagnostics
- Separate power supply for valves
- Flexible conversion without address shifting
- Option of CP interface
- CPX-CEC as stand-alone controller with access via Ethernet and web server
- Transmission of status, parameter and diagnostic data
- → Internet: cpx


VTSA/VTSA-F with electrical peripherals CPX

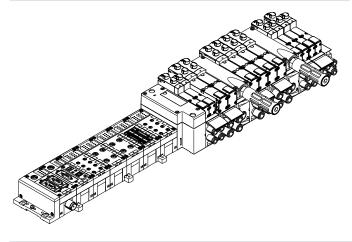

Modularity with electrical peripherals CPX

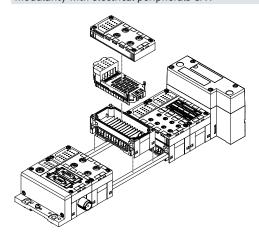

CPX terminal in metal design

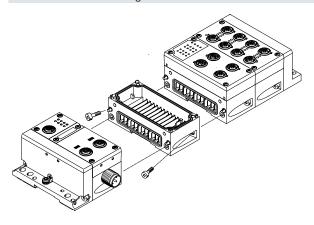

The metal CPX modules are mechanically connected using an angled fitting.
The CPX terminal can thus be expanded at any time.



Note

The CPX connection blocks are also available in metal. This means a complete solution in a sturdy metal design can be selected for applications of the valve terminal VTSA/VTSA-F/VTSA-F-CB in welding environments.


Valve terminal widths

Regardless of the type of control (e.g. multi-pin plug, fieldbus, etc.), valve terminals VTSA/VTSA-F of widths:

- 18 mm
- 26 mm
- 42 mm
- 52 mm

can be combined without adapters. These four widths can also be used without an adapter for the valve terminal VTSA-F-CB controlled via CPX.

This enables a flow range for the VTSA of: 400 l/min to 2900 l/min For the VTSA-F of: 700 l/min to 2900 l/min and for the VTSA-F-CB of: 700 l/min to 2900 l/min to be covered on one valve terminal. A wide range of valve functions and vertical stacking components are available for all widths. The valve terminal VTSA-F-CB is controlled via the CPX pneumatic interface with serial communication.
The valve terminal VTSA-F-CB cannot be installed in combination with a valve terminal VTSA/VTSA-F.

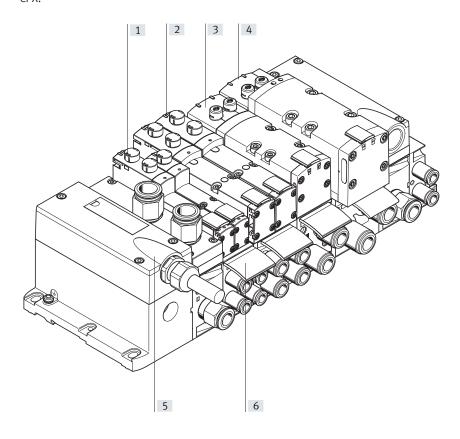

		Description	→ Page/Internet
[1]	Valve	Width 18 mm	112
[2]	Valve	Width 26 mm	120
[3]	Valve	Width 42 mm	128
[4]	Valve	Width 52 mm	135
[5]	Multi-pin plug connection	With 24 V DC multi-pin cable (VTSA/VTSA-F only)	151
[6]	Inscription labels	For manifold sub-base, connecting plate, angled connection plate	156


Individual sub-base, width 18 mm, ISO 15407-2


Order code: Individual sub-bases can be
• Using individual part numbers equipped with any valve.

The electrical connection is established via a standardised 4-pin M12 plug (EN 61076-2-101) or it can be configured by the user via a 4-pin clamped terminal connection/open cable end.

Width 18 mm with spring-loaded terminal or cable (open end)



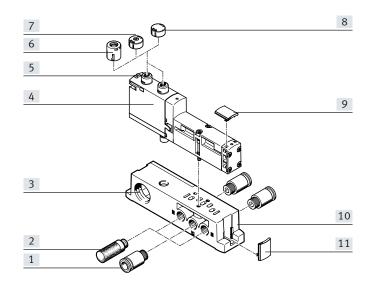

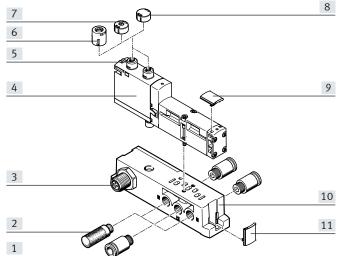


		Description	→ Page/Internet
[1]	Fitting	G1/8 for supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	242
[2]	Silencer	U-1/8-B for exhaust ports (3, 5)	243
[3]	Electrical connection	Spring-loaded terminal, cable (open end) or M12 plug1), 4-pin	_
[4]	Valve VSVA	Width 18 mm	112
[5]	Manual override	Non-detenting/detenting, per solenoid coil	-
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155
[7]	Cover cap, coded	For non-detenting manual override (limited function)	155
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155
[9]	Inscription label holder	For valves	156
[10]	Individual sub-base	For valve VSVA	240
[11]	Inscription label holder	For manifold block	156


¹⁾ Only for 24 V DC

Individual sub-base, width 26 mm, ISO 15407-2

With spring-loaded terminal or cable (open end)

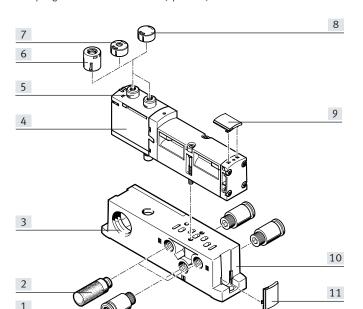

With M12 push-in connector

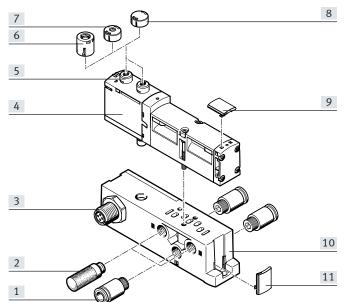


		Description	→ Page/Internet
[1]	Fitting	G1/4 for supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	242
[2]	Silencer	U-1/4-B for exhaust ports (3, 5)	243
[3]	Electrical connection	Spring-loaded terminal, cable (open end) or M12 plug1), 4-pin	_
[4]	Valve VSVA	Width 26 mm	120
[5]	Manual override	Non-detenting/detenting, per solenoid coil	_
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155
[7]	Cover cap, coded	For non-detenting manual override (limited function)	155
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155
[9]	Inscription label holder	For valves	156
[10]	Individual sub-base	For valve VSVA	240
[11]	Inscription label holder	For manifold block	156


¹⁾ Only for 24 V DC

Individual sub-base, width 42 mm, ISO 5599-2

With spring-loaded terminal or cable (open end)

With M12 plug

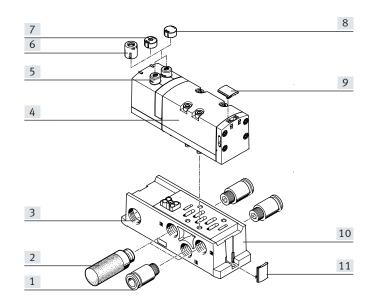

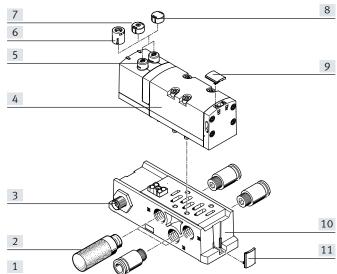


		Description	→ Page/Internet
[1]	Fitting	G3/8 for supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	242
[2]	Silencer	U-3/8-B for exhaust ports (3, 5)	243
[3]	Electrical connection	Spring-loaded terminal, cable (open end) or M12 plug1), 4-pin	_
[4]	Valve VSVA	Width 42 mm	128
[5]	Manual override	Non-detenting/detenting, per solenoid coil	_
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155
[7]	Cover cap, coded	For non-detenting manual override (limited function)	155
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155
[9]	Inscription label holder	For valves	156
[10]	Individual sub-base	For valve VSVA	240
[11]	Inscription label holder	For manifold block	156


¹⁾ Only for 24 V DC

Individual sub-base, width 52 mm, ISO 5599-2

With spring-loaded terminal or cable (open end)



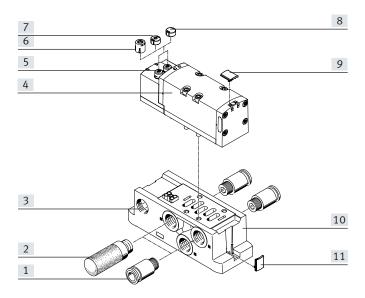

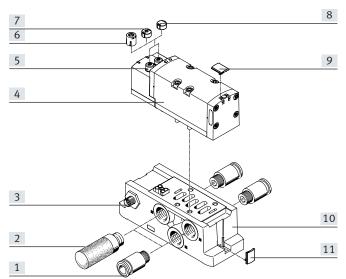

		Description	→ Page/Internet
[1]	Fitting	G1/2 for supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	242
[2]	Silencer	U-1/2-B for exhaust ports (3, 5)	243
[3]	Electrical connection	Spring-loaded terminal, cable (open end) or M12 plug1), 4-pin	_
[4]	Valve VSVA	Width 52 mm	135
[5]	Manual override	Non-detenting/detenting, per solenoid coil	_
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155
[7]	Cover cap, coded	For non-detenting manual override (limited function)	155
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155
[9]	Inscription label holder	For valves	156
[10]	Individual sub-base	For valve VSVA	240
[11]	Inscription label holder	For manifold block	156

¹⁾ Only for 24 V DC


Pneumatic components of valve terminal VTSA/VTSA-F

The conventional manifold subbases for valves with a width of 18 or 26 mm are either suitable for

- 2 single solenoid valves or
- 2 double solenoid valves depending on the size.
 The hybrid manifold sub-base makes it possible to use
 1 double solenoid valve (18 mm)
- 1 double solenoid valve (26 mm) together on the same manifold sub-base.

The manifold sub-bases for valves with a width of 42 or 52 mm are suitable for:

- 1 single solenoid valve or
- 1 double solenoid valve
- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a cover plate.

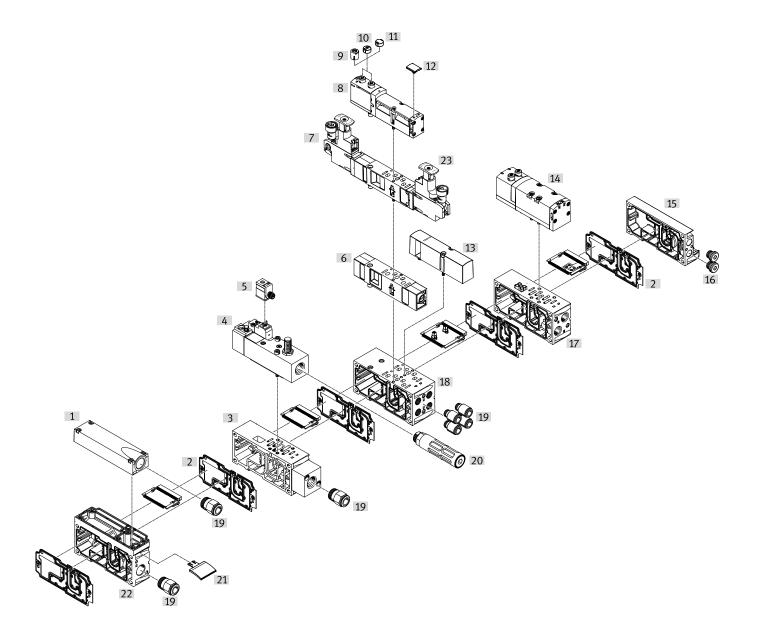

Pne	Pneumatic components of valve terminal VTSA/VTSA-F			
		Description	→ Page/Internet	
[1]	Exhaust port cover	For ducted exhaust air (ports 3 and 5 combined)	143	
[2]	Duct separation/seal	-	155	
[3]	Manifold sub-base	For soft-start valve	198	
[4]	Soft-start valve	For slow and safe pressure build-up	190	
[5]	Plug socket	-	199	
[6]	Throttle plate	-	149	
[7]	Pressure regulator plate	-	144	
[8]	Valve	Width 18 mm or 26 mm	112, 120	
[9]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155	
[10]	Cover cap, coded	For non-detenting manual override (limited function)	155	
[11]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155	
[12]	Inscription label holder	For valve	156	
[13]	Cover plate	For unused valve position (vacant position)	149	
[14]	Valve	Width 42 mm or 52 mm	128, 135	
[15]	End plate with pilot air selector	-	154	
[16]	Blanking plug	-	243	
[17]	Manifold sub-base VTSA	For valves with a width of 42 mm or 52 mm	142	
[17]	Manifold sub-base VTSA-F	For valves with a width of 42 mm or 52 mm	142	
[18]	Manifold sub-base VTSA	For valves with a width of 18 mm or 26 mm	142	
[18]	Manifold sub-base VTSA-F	For valves with a width of 18 mm or 26 mm	142	
[19]	Fittings	-	242	
[20]	Silencer	-	243	
[21]	Inscription label holder	For manifold sub-base, connecting plate, angled connection plate	156	
[22]	Supply plate	-	143	
	Control element	Regulator knobs in different versions	40	



Special applications for the valve terminal, such as:

- Solenoid valve with switching position sensing
- Control block with safety function
- Pilot air switching valve
- Soft-start valve
- Vacuum block

are listed after → Accessories – General

Pneumatic components of valve terminal VTSA-F-CB

The conventional manifold subbases for valves with a width of 18 or 26 mm are either suitable for

- 2 single solenoid valves or
- 2 double solenoid valves depending on the size.


The hybrid manifold sub-base (with CBUS loop-through) makes it possible to use

- 1 double solenoid valve (18 mm) and
- 1 double solenoid valve (26 mm)

together on the same manifold sub-base.

The manifold sub-bases for valves with a width of 42 or 52 mm are suitable for:

- 1 single solenoid valve or
- 1 double solenoid valve
- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a cover plate.

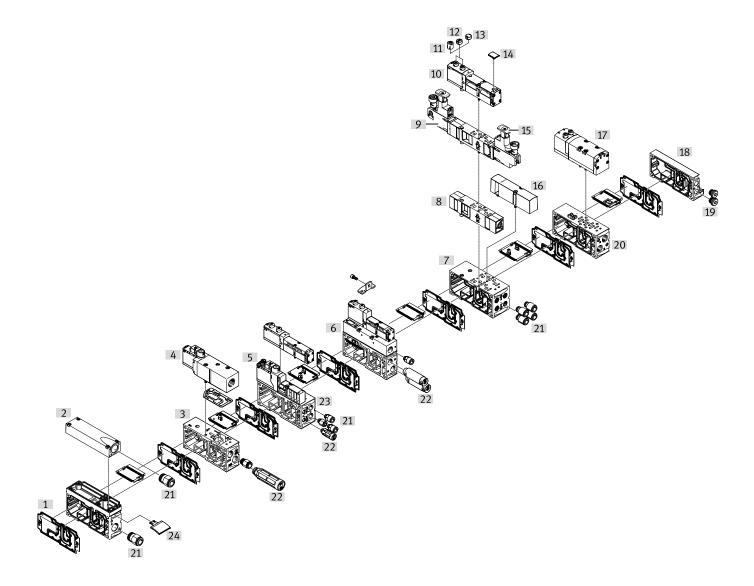

Pne	Pneumatic components of valve terminal VTSA-F-CB			
		Description	→ Page/Internet	
[1]	Duct separation/seal	-	155	
[2]	Exhaust port cover	For ducted exhaust air (ports 3 and 5 combined)	143	
[3]	Manifold sub-base	For soft-start valve	205	
[4]	Soft-start valve for VTSA-F-CB	For slow and safe pressure build-up	200	
[5]	Pilot air switching valve for VTSA-F-CB	-	184	
[6]	Vacuum generator for VTSA-F-CB	For vacuum generation	216	
[7]	Manifold sub-base VTSA-F-CB	For valves with a width of 18 mm or 26 mm with CBUS loop-through	142	
[8]	Throttle plate	-	149	
[9]	Pressure regulator plate	-	144	
[10]	Valve	Width 18 mm or 26 mm	112,, 120	
[11]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	155	
[12]	Cover cap, coded	For non-detenting manual override (limited function)	155	
[13]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	155	
[14]	Inscription label holder	For valve	156	
[15]	Control element	Regulator knobs in different versions	40	
[16]	Cover plate	For unused valve position (vacant position)	149	
[17]	Valve	Width 42 mm or 52 mm	128, 135	
[18]	End plate with pilot air selector	-	154	
[19]	Blanking plug	-	243	
[20]	Manifold sub-base VTSA-F-CB	For valves with a width of 18 mm or 26 mm with CBUS loop-through	142	
[21]	Fittings	-	242	
[22]	Silencer	-	243	
[23]	Manifold sub-base VTSA-F-CB	For pilot air switching valve (hybrid manifold sub-base)	142	
[24]	Inscription label holder	For manifold sub-base, connecting plate, angled connection plate	156	
[25]	Supply plate/air supply plate	-	143	



Special applications for the valve terminal, such as:

- Solenoid valve with switching position sensing
- Control block with safety function
- Pilot air switching valve
- Soft-start valve
- Vacuum generator

are listed after → Accessories – General

Valve terminal with individual electrical connection

Order code for VTSA:


- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with individual electrical connection can be expanded with up to 20 valves with max. 20 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a cover plate.
- The electrical connection is established via a 5-pin M12 plug (24 V DC).

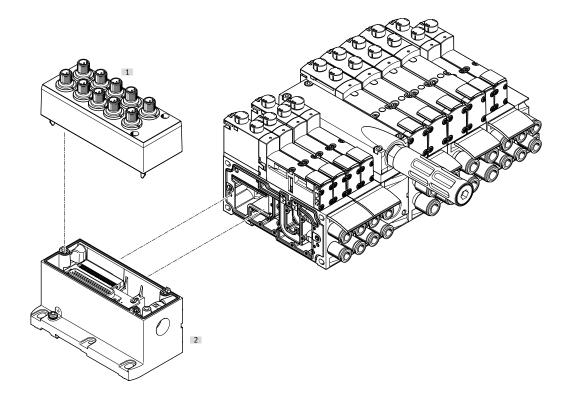

		Description	→ Page/Internet
[1]	Cover	For individual connection	151
[2]	Multi-pin plug connection	Individual connection with M12, 10-way or 6-way (including cover)	151

2025/06 – Subject to change

Valve terminal with electrical multi-pin plug connection


Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with multi-pin plug connection can be expanded with up to 32 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a cover plate.
- The following multi-pin plug connections to IP65 are available:
- 37-pin Sub-D connection
 (24 V DC): the connecting cable
 can be ordered in lengths of
 2.5 m, 5 m and 10 m for max. 8,
 22 or 32 solenoid coils
 respectively.
- Terminal strip (24 V DC), 19-pin round plug (24 V DC)

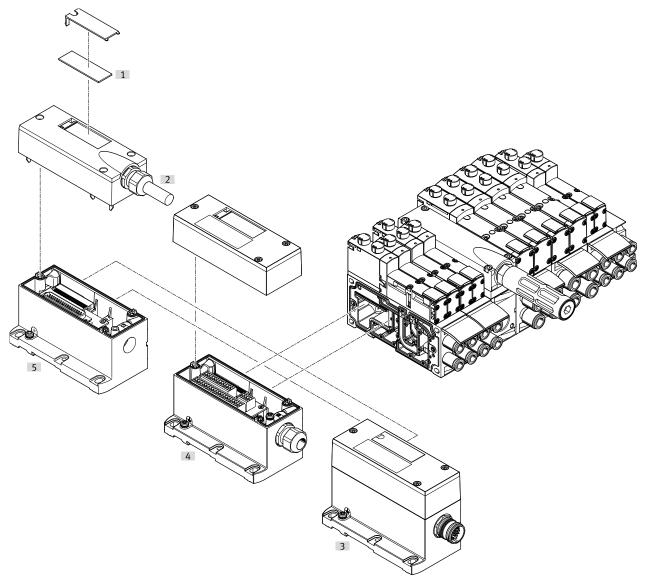

		Description	→ Page/Internet
[1]	Inscription labels	Large, for multi-pin plug connection	-
[2]	Multi-pin cable	Connecting cable	154
[3]	Multi-pin plug connection	Via M23 round plug connection, 24 V DC	151
[4]	Multi-pin plug connection	Via terminal strip (CageClamp) 24 V DC	151
[5]	Multi-pin plug connection	Via multi-pin cable, 24 V DC	151

Valve terminal with AS-Interface connection

Order code for VTSA:


- 52E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 52E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

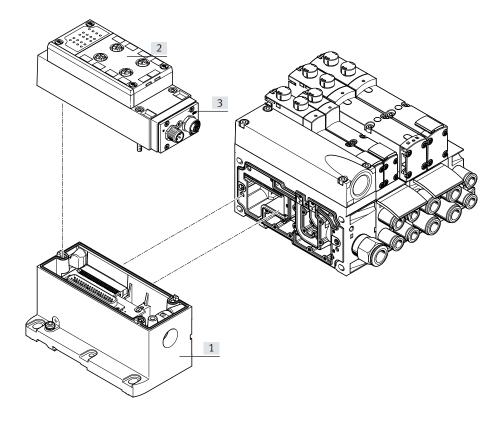

		Description	→ Page/Internet
[1]	Multi-pin plug connection	Can be ordered together with the AS-Interface module as an electrical connection for AS-Interface	152
[2]	Manifold block for AS-Interface	-	152
[3]	AS-Interface module	-	152

Valve terminal with I-Port/IO-Link® connection


Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with I-Port/IO-Link® connection can be expanded with up to 16 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

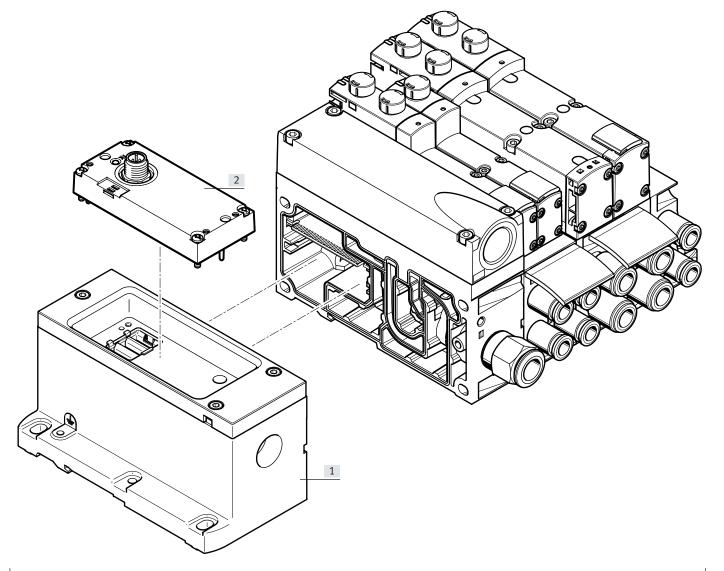

		Description	→ Page/Internet
[1]	Multi-pin plug connection	-	151
[2]	I-Port/IO-Link® connection	Electrical interface IO-Link®	152

Valve terminal with AP interface


Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

VTSA/VTSA-F valve terminals with AP interface can be expanded with up to 12 valves with a maximum of 24 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a blanking plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

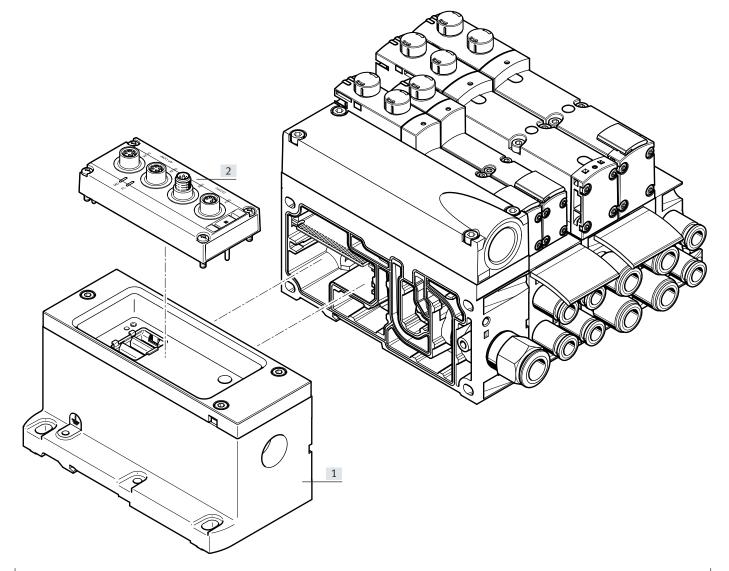

		Description	→ Page/Internet
[1]	Multi-pin plug connection	-	151
[2]	AP interface	Electrical interface protocol AP-COM	83

Valve terminal with fieldbus interface, control block (electrical peripherals CPX)

Order code:

- 50E-... for the electrical peripherals, polymer variant
- 51E-... for the electrical peripherals, metal variant
- 53E-... for the electrical peripherals, for control cabinet installation
- 44P-... for the pneumatic components For VTSA-F:
- 45P-... for the pneumatic components For VTSA-F-CB:
- 46P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with parallel communication and fieldbus interface can be expanded with up to 32 valves with max. 32 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.
- Double solenoid valve positions can be equipped with any valve or a blanking plate.


 Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

The valve terminal VTSA-F-CB with serial communication can be expanded with up to 96 valves with max. 96 solenoid coils. 4 zones can be equipped with max. 24 valves/ solenoid coils.

Each valve position can be equipped

with any valve or a blanking plate. The rules for CPX apply to the equipment that can be used with the electrical peripherals CPX. In general:

- Max. 10 electrical modules
- Digital inputs/outputs
- Analogue inputs/outputs
- Parameterisation of inputs and outputs
- Integrated, convenient diagnostics
- Preventive maintenance concepts

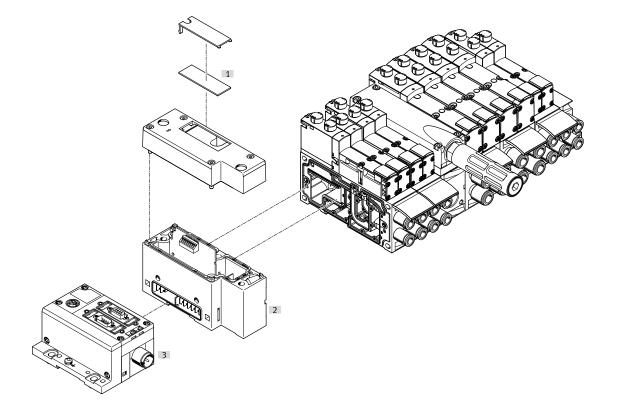

		Description	→ Page/Internet
[1]	Inscription labels	Large, for pneumatic interface CPX	-
[2]	Pneumatic interface	-	151
[3]	Fieldbus interface	-	срх


Valve terminal with fieldbus/multi-pin plug connection and individually electrically actuated valve

In applications with specific emergency off conditions, it may be necessary to switch one or more valves separately from the valve terminal controller. Standard valves (VSVA) with individual electrical connection (round or square plug) are therefore mounted on the valve terminal.

In order for degree of protection IP65 to be achieved, the functionless opening in the sub-base for the electrical connection must be sealed.

A sealing cap is available for width 18 mm and 26 mm. With manifold or individual sub-bases, valves with width 42 mm and 52 mm must be used with a seal to comply with the IP degree of protection (see a page 149).

For centrally controlling the valve terminal via a multi-pin plug connection or fieldbus interface, the occupied valve position acts like a vacant position, i.e. the assigned address in the fieldbus node or the corresponding connection in the multi-pin plug connection is occupied.

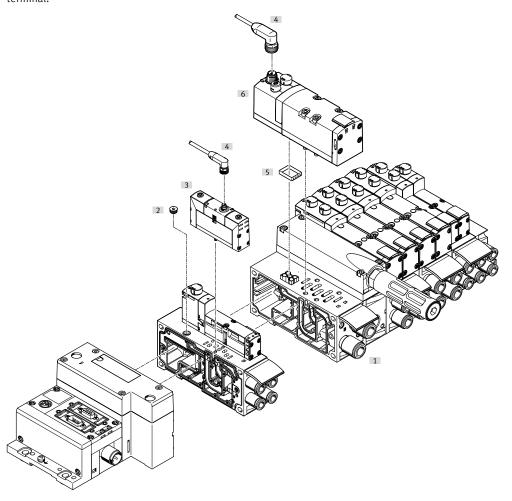


		Description	→ Page/Internet
[1]	Valve terminal	Valve terminal with fieldbus/multi-pin plug connection and individually electrically actuated valve	-
[2]	Sealing cap	For sealing the electrical connection on the sub-base	149
[3]	Valve	Width 18 mm or width 26 mm	valves vsva
[4]	Connecting cable	-	valves vsva
[5]	Seal	For ensuring the IP degree of protection (with width 42 mm and 52 mm)	150
[6]	Valve	Width 42 mm or width 52 mm	valves vsva

- 🏺 - Not

Standards-based valves VSVA can be used on the valve terminal. A vacant position must be provided for this in the valve terminal configurator. The appropriate standards-based valve VSVA can be ordered on the Internet at:

→ vsva

Manifold sub-base



VTSA/VTSA-F with parallel communication is based on a modular system which consists of manifold sub-bases and valves. The VTSA-F manifold sub-bases are designed to optimise the flow rate.


Manifold sub-bases are available for valve widths 18 mm and 26 mm in a double grid, i.e. two valves per manifold sub-base.

For VTSA-F-CB with serial communication, there are manifold sub-bases available for valve widths 18 mm and 26 mm in a double grid.

For valves with a width of 42 mm or 52 mm, there are manifold subbases with one valve per subbase. The manifold sub-base contains a duct seal and an electrical link. They can be freely mixed within a valve terminal. The manifold sub-bases are screwed together, thus forming the support system for the valves. Inside the manifold sub-bases are the connection ducts for supplying compressed air to and exhausting the valve terminal as well as the working ports for the pneumatic cylinders for each valve.

Each manifold sub-base is connected to the next using four screws. Individual valve terminal sections can be isolated and further manifold sub-bases can be inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.

Hybrid manifold sub-base



With hybrid manifold sub-bases, a valve with a width of 18 mm can be combined with a valve with a width of 26 mm on one manifold sub-base.

Port patterns to ISO 154072

Width 18 mm (size 02)


0000000

Width 26 mm (size 01)




Port patterns to ISO 55992

Width 42 mm (size 1)





Width 52 mm (size 2)



Port patterns – High-flow sub-bases with optimised flow rate (no standard)


Width 18 mm Width 26 mm





Hybrid manifold sub-base

Width 18 mm + 26 mm





The illustrations shown represent the pneumatic port patterns.

The port patterns on the valve terminal VTSA-F/VTSA-F-CB and the hybrid manifold sub-base do not correspond to the ISO standards.

Code		Туре	Width				No. of valve positions (solenoid coils)1)	Working ports (2, 4)	
			18 mm	26 mm	42 mm	52 mm		Code M Large	Code N Small
Manifol	d sub-base for double soleno								
A		VABV-S4-2S-G18-2T2	١.				2 (4)	QS-G1/8-8	_
λK	100000		-	_	_	_		-	QS-G1/8-6
3		VABV-S4-1S-G14-2T2		_			2 (4)	QS-G1/4-10	_
3K	000		_	•	_	_		-	QS-G1/4-8
-		VABV-S2-1S-G38-T2					1 (2)	QS-G3/8-12	-
CK			_	_	•	_		-	QS-G3/8-10
)		VABV-S2-2S-G12-T2					1 (2)	QS-G1/2-16	_
OK			_	_	_	•		_	QS-G1/2-12
Manifol	d sub-base for single solenoi	d valves		I	I	I		<u> </u>	
	02	VABV-S4-2S-G18-2T1					2 (2)	QS-G1/8-8	_
EK	100000		-	_	_	_		_	QS-G1/8-6
	500	VABV-S4-1S-G14-2T1					2 (2)	QS-G1/4-10	_
K	0:0		_	•	_	_		_	QS-G1/4-8
i		VABV-S2-1S-G38-T1					1 (1)	QS-G3/8-12	_
iΚ			_	_	•	_		_	QS-G3/8-10
l		VABV-S2-2S-G12-T1					1 (1)	QS-G1/2-16	_
łK			-	_	_	•			QS-G1/2-12

¹⁾ The value in brackets is the max. number of solenoid coils that can be actuated

Code	d sub-base variants with QS fit	Туре	Width				No. of valve	Working ports (2, 4)		
		18 mm	26 mm	42 mm	52 mm	positions (solenoid coils)1)	Code M Large	Code N Small		
Manifol	d sub-base for double solenoid	valves								
Α		VABV-S4-2HS-G18-2T2					2 (4)	QS-G1/8-8	_	
AK	10000		•	_	_	-		_	QS-G1/8-6	
В		VABV-S4-1HS-G14-2T2					2 (4)	QS-G1/4-10	-	
ВК	Odo		_	•	_	_		-	QS-G1/4-8	
С		VABV-S2-1HS-G38-T2	_	_		_	1 (2)	QS-G3/8-12	-	
CK						_		_	QS-G3/8-10	
D		VABV-S2-2S-G12-T2	_	_	_		1 (2)	QS-G1/2-16	-	
DK						_		_	QS-G1/2-12	
Manifol	d sub-base for double solenoid	valves, hybrid sub-base								
XA		VABV-S4-12HS-G-2T2		valve ı 18 mm			2 (4)	Left valve position: QS-G1/8-8 QS-G1/8-10	-	
			2nd	valve 1 26 mm	_	-		Right valve position: QS-G1/4-8 QS-G1/4-10		
XAK		VABV-S4-12HS-G-2T2 • 1x double solenoid, width 18 mm • 1x double solenoid,	position	valve 1 18 mm	_	_	2 (4)	-	Left valve position: QS-G1/8-6 QS-G1/8-8	
		width 26 mm • with small fittings	1	valve i 26 mm					Right valve position: QS-G1/4-6 QS-G1/4-8	
Manifol	d sub-base for single solenoid	valves							-	
Е		VABV-S4-2HS-G18-2T1				_	2 (2)	QS-G1/8-8	-	
EK	100000000000000000000000000000000000000		_	_		_		_	QS-G1/8-6	
F	0.00	VABV-S4-1HS-G14-2T1	_		_	_	2 (2)	QS-G1/4-10	-	
FK	000							-	QS-G1/4-8	
G GK		VABV-S2-1HS-G38-T1	_	_		_	1 (1)	QS-G3/8-12	QS-G3/8-10	
Н		VABV-S2-2S-G12-T1					1 (1)	QS-G1/2-16	-	
			_	_	_	•		_	OS-G1/2-12	
HK								_	QS-G1/2-12	

¹⁾ The value in brackets is the max. number of solenoid coils that can be actuated

Code		Туре	Width			No. of valve positions	
			18 mm	26 mm	42 mm	52 mm	(solenoid coils)1)
Manifo	old sub-base for double solenoid	valves					
Α		VABV-S4-2HS-G18-CB-2T2	•	_	_	_	2 (4)
В		VABV-S4-1HS-G14-CB-2T2		_			2 (4)
	000		_	•	_	_	
С		VABV-S2-1HS-G38-CB-T2			-		1 (2)
D		VABV-S2-2S-G12-CB-T2				•	1 (2)
	old sub-base for double solenoid	valves, hybrid manifold sub-base					
YA		VABV-S4-12HS-G-CB-2T2					2 (4)
		 (external sensor evaluation) 1x double solenoid, width 18 mm 1x double solenoid, width 26 mm 			_	_	
Manifo	old sub-base for single solenoid						
E		VABV-S4-2HS-G18-CB-2T1	•	-	-	-	2 (2)
F		VABV-S4-1HS-G14-CB-2T1					2 (2)
	030		-	•	_	_	
G		VABV-S2-1HS-G38-CB-T1	_	_	-	_	1 (1)
Н		VABV-S2-2S-G12-CB-T1					1 (1)
	1000		_	_	_	•	


¹⁾ The value in brackets is the max. number of solenoid coils that can be actuated

Code		Туре	Width					
			18 mm	26 mm	40 mm	52 mm	positions (solenoid coils)1)	
Manifol	d sub-base for soft-start valve							
PV		VABV-S6-1Q-G38-CB1-T5	-	_	•	_	1	
PS		VABV-S6-1Q-G38-CB-T5	-	-	•	-	1	
Manifol	d sub-base for pilot air switchin	g valve						
YB	000	VABV-S4-2HS-G18-CB-2T5	•	_	_	_	2 (4)	
YC		VABV-S4-12HS-G-CB-2T5		-	-	-	2 (4)	

¹⁾ The value in brackets is the max. number of solenoid coils that can be actuated

Angled	connection plate for working p	orts 2 and 4						
Code		Туре	Width		Width Connections		Connections	Working ports (2, 4) on the
			18 mm	26 mm	42 mm	52 mm		angled connection plate
Р		VABF-S4A2G2-G	•	_	_	_	2 and 4	G1/8
			-	•	-	-		G1/4
			_	_	•	-		G3/8
			-	-	-	•		G1/2

Sub-base valve



All valves have a piston spool and patented sealing system, which ensures efficient sealing, a broad operating pressure range and long service life.

Sub-base valves can be quickly replaced since the tubing connections remain on the manifold sub-base.

Irrespective of the valve function, there are sub-base valves with one solenoid coil (single solenoid) or with two solenoid coils for double solenoid or double valve functions.

Reverse/vacuum operation

Select reverse operation (code Z) if you wish to operate an actuator (cylinder) with different pressures for the forward and return stroke.

Please note that the valves must then be operated via a separate pressure zone. The reversible 3/2-way solenoid valves are also suitable for vacuum operation.

Reverse operation is only possible in pressure zones with external pilot air supply.



Note

- If a pressure zone is in reverse operation, the supply pressure is connected to port 3/5 and the air is exhausted via port 1 at all valve positions in this pressure zone.
- Reversible pressure regulators cannot be selected when a pressure zone is in reverse operation.
- With reversible pressure regulators, only the valve at this position is in reverse operation.
- When 5/3-way valves are operated in reverse, the mid-position function is changed from exhausted to pressurised and vice versa.

Blanking plate




Plate without valve function for reserving valve positions on a valve terminal.

Valve and blanking plates are mounted on the manifold subbase using screws.

Design

Replacing valves

The valves are attached to the metal manifold sub-base using two or four screws, which means that they can be easily replaced.

The sturdy mechanical structure of the sub-base ensures efficient, durable sealing.

Extension

Vacant positions can be fitted with valves at a later date. The dimensions, mounting points and existing pneumatic installations remain unchanged during this process.

For more information and technical data on extension, refer to the user manual:

→ Internet: VTSA/VTSA-F

Valve fund		lva.	Width				In
code	Circuit symbol	Valve code	18 mm	26 mm	42 mm	52 mm	Description
VC	12 12 12 12 12 12 12 12 12 12 12 12 12 1	T22C		•	•	•	2x 2/2-way valve, single solenoid Normally closed pneumatic spring return
VV	112/114 11 1 11 (14) (5) (3)	T22CV	•	•	•	_	2x 2/2-way valve, single solenoid Reverse operation Normally closed pneumatic spring return Vacuum operation possible at 3 and 5
N	12/14 1 5 3	T32U	•	•	•	•	2x 3/2-way valve, single solenoid Normally open pneumatic spring return Operating pressure > 3 bar
К	12/14 1 5 3	T32C		•	•	•	2x 3/2-way valve, single solenoid Normally closed pneumatic spring return Operating pressure > 3 bar
Н	12/14 1 5 3	Т32Н	•	•	•	•	2x 3/2-way valve, single solenoid Normal position 1x normally closed 1x normally open pneumatic spring return Operating pressure > 3 bar
P	30/50 5 1 3 12 (14) (1) (5/3) (1)	T32F	•	•	•	•	2x 3/2-way valve, single solenoid Reverse operation only Normally open pneumatic spring return
Q	32 54 32 77 77 32/54 51 (14) (1) (5/3) (1)	T32N	-	-	-	-	2x 3/2-way valve, single solenoid Reverse operation only Normally closed pneumatic spring return
R	30/54 5 1 3 12 30/54 5 1 3 12	T32W	•	•	•	•	2x 3/2-way valve, single solenoid Reverse operation only Normal position 1x normally closed 1x normally open pneumatic spring return



A filter must be installed upstream of valves operated in vacuum mode.

This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

Valve fund	ction						
Terminal code	Circuit symbol	Valve code	Width	26			Description
M	14 4 2 12 12	M52-A	18 mm	26 mm	42 mm	52 mm	5/2-way valve, single solenoid Reverse operation pneumatic spring return
0	14 4 2 T T T T T T T T T T T T T T T T T	M52-M	•	•	•	•	5/2-way valve, single solenoid Reverse operation mechanical spring return
J	14 4 2 12 (14) 5 1 3	B52	•	•	•	•	5/2-way valve, double solenoid
D	14 4 2 12 (14) 5 1 3	D52	•	•	•	•	5/2-way valve, double solenoid Dominant signal at port 14 on the control side
SO SQ SS		M52-M	•	-	-	-	5/2-way valve2), single solenoid, as plug-in or via pilot valve with pneumatic interface to ISO 15218 See also special valve function in the separate chapter "Solenoid valve with switching position sensing" a page 161
SO SQ SS	4 2 5 14 5 1 3	M52-M	-	•	-	-	5/2-way valve2), single solenoid, as plug-in or via pilot valve with pneumatic interface to ISO 15218 See also special valve function in the separate chapter "Solenoid valve with switching position sensing" a page 161
SP SN	14 T T T T T T T T T T T T T T T T T T T	T52-M	-	•	-	-	2x 5/2-way valve, single solenoid, with switching position sensing, pneumatically linked via two ducts for special valve function "control block with safety function" a page 167
В	14 W 4 2 W 12 (14)	P53U	•	•	•	•	5/3-way solenoid valve • Mid-position pressurised ¹⁾ • mechanical spring return
G	14 W 4 2 W 12 (14) 5 1 3	P53C	•	•	•	•	5/3-way solenoid valve • Mid-position closed ¹⁾ • Mechanical spring return
E	14 W 4 2 W 12 (14) 5 1 3	P53E	•	•	•	•	5/3-way solenoid valve • Mid-position exhausted ¹⁾ • mechanical spring return


¹⁾ If neither solenoid coil is energised, the valve is moved to its mid-position by a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first

²⁾ The symbol represents a valve with a proximity switch with a switching output signal, in the illustration an N/O contact. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. All sensors used here have an N/C contact as the switching element function.

Valve func	tion						
Terminal code	Circuit symbol	Valve code	Width 18 mm	26 mm	42 mm	52 mm	Description
SA	14 W 4 2 12 (14) 5 1 3	P53ED	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 14 is retained • Pressureless switching, self-latching loop, pneumatic operation • Mid-position exhausted, switching position 14 is retained • Mechanical spring return
SB	14 W 4 2 14(12) (14) 5 1 3	P53AD	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 14 is retained • Holding, blocking a movement (mechanically) • Mid-position port 2 pressurised, port 4 exhausted, switching position 14 is retained • Mechanical spring return
SD	12 W 4 2 12 12 (14) 5 1 3	P53BD	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 14 is retained • Holding, blocking a movement (mechanically) • Mid-position port 4 pressurised, port 2 exhausted, switching position 14 is retained • Mechanical spring return
SE	14 - 4 2 W 12 (14) 5 1 3	P53EP	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 12 is retained • Pressureless switching, self-latching loop, pneumatic operation • Mid-position exhausted, switching position 12 is retained • Mechanical spring return
VG	14W 4 2 W12 (14) 5 1 3	P53F	-	-	•	•	5/3-way solenoid valve • Positioning • Mid-position port 2 pressurised, port 4 closed1) • Mechanical spring return
VB	-	-	-	•	-	-	Vacuum generator with ejector pulse and adjustable air saving function (plate for 2 valve positions, sensor SDE3 with display and M12 connection)
L	_	_	•	•	•	•	For valve terminal only: Cover plate for vacant valve position

¹⁾ If neither solenoid coil is energised, the valve is moved to its mid-position by a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first.

Vertical stacking



Additional function units can be added to each valve position between the base plate (manifold sub-base) and the valve.


These functions are known as vertical stacking modules and enable special functions or control of an individual valve position. It is possible to link several valve sizes on one valve terminal.



Note

Certain combinations are not recommended due to the design of the individual vertical stacking components.

Vertical stacking components

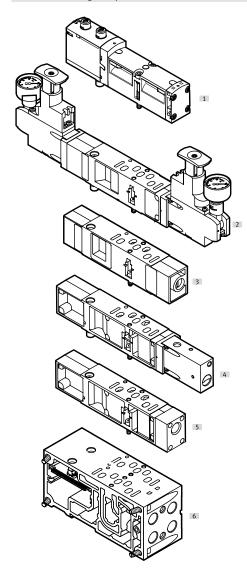


The following component sequence is recommended for valve positions with vertical stacking:

- [1] Valve VSVA
- [2] Pressure regulator plate
- [3] Throttle plate
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base

Vertical stacking

Pressure regulator plate



An adjustable pressure regulator can be installed between the base plate (manifold sub-base) and the valve to control the force of the triggered actuator.

This pressure regulator maintains a largely constant output pressure (secondary side) independent of pressure fluctuations (primary side) and air consumption. Also suitable for valves with symmetrical design.

Standard version:

- Standard port pattern to ISO 15407-2 or ISO 5599-2
- For pressure regulation up to 6 bar or up to 10 bar
- Without pressure gauge (optional)
- Regulator knob with 3 positions (locked, reference position, freely positionable)

· 🖟 - Note

With the A, B and AB pressure regulators VABF-S...-1-..., the regulated pressure should not be less than 2 bar.

Use the reversible A, B or AB pressure regulators for regulated pressure of less than 2 bar.

- 📱 - Note

Please note when reordering pressure regulators in sizes 42 mm and 52 mm:


The part number printed on the regulator plate refers only to the standard version.

When reordering pressure regulators with additional equipment, such as an extended design, only use the VABF configurator.

→ Internet: vabf-s2

Rotary knob for pressure regulator for width 42 mm and 52 mm $\,$


Setting the pressure

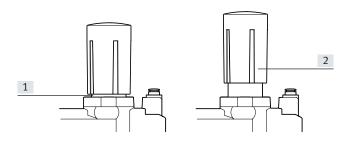

- [1] Pull the rotary knob upwards out of the locking position (1) into the setting position (2)
- [2] Set the desired pressure at the setting level (2) using the rotary knoh
- [3] After setting the pressure, push the rotary knob back down to the locking position (1)

Rotary knob for pressure regulator for width 42 mm and 52 mm

Locking the rotary knob



After setting the pressure, the rotary knob can be locked against unauthorised actuation.

To do this, the blue locking element is pushed out and secured with a padlock.

The rotary knob is now fixed in place and cannot be moved.

- Note

The position of the rotary knob and the locking element is determined by the pressure setting.

If a number of pressure regulators are installed next to one another, there may not always be enough space to push out the locking elements.

To ensure that the rotary knob can still be locked, it can be pulled off completely, rotated 60° or 120° and pushed back on.

[1] Locking element, pushed out

Vertical stacking

Energy efficiency through dual-pressure operation or through operation with reversible pressure regulators

Saving energy starts with compressed air generation. It is possible to achieve energy savings of up to 10% per 1 bar drop in pressure. Therefore, wherever possible reduce the pressure to the minimum required.

To save additional energy, you can operate valves in dualpressure mode in a separate pressure zone.

To do this, the valves used must be operated in reverse mode, i.e. with reversed flow direction (see also information on a page 107). In dual-pressure operation, the valves are then supplied with pressure separately via ducts 3 and 5.

The air is exhausted via duct 1.

Requirements for dual-pressure operation:

- Exhaust ducts 3 and 5 in the pressure zone are completely separate.
- Valves are used that can be operated in reverse mode.

Advantages of dual-pressure operation:

It is possible to save energy if a valve can be supplied with different pressures. The advantages are:

- Saves energy because the return stroke can be carried out using reduced force, e.g. 3 bar instead of 6 bar.
- Just one valve is required, as in the case of vacuum application with ejector pulse for example (e.g. duct 3 for vacuum switching, duct 5 for the ejector pulse).
- A reduction in compressed air consumption of up to 50% is possible if two different pressures can be applied to the valve (return stroke uses reduces pressure).


Advantages of reversible operation:

If compressed air is applied to the pressure regulator upstream of the valve (circuit diagram 2), exhausting is directly via the solenoid valve.

This has the following advantages:


- Increased exhaust capacity, exhausting is up to 50% quicker
- Lower wear on the pressure regulator
- Can be adjusted very accurately, perfect for very low operating pressures
- No quick exhaust valves are required.
- Fast cycle times
- The pressure regulator can be adjusted independently of the valve position because operating pressure is permanently present at the pressure regulator.

Dual-pressure operation with standard regulator

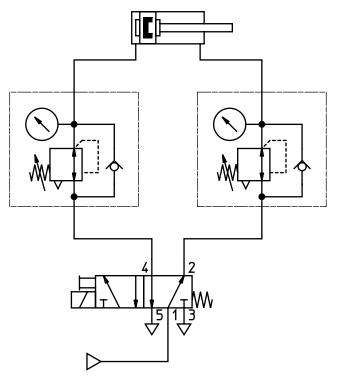

Circuit diagram 1:
Pressure is regulated downstream of the valve


Dual-pressure operation with reversible controller

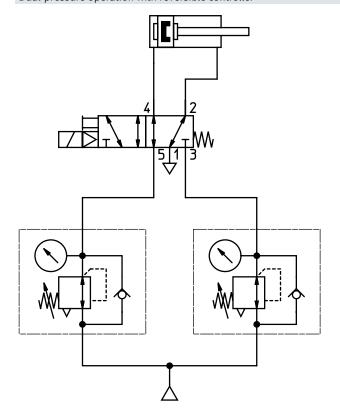

Circuit diagram 2: Pressure is regulated upstream of the valve

Vertical stacking

Mode of operation of the pressure regulator plate (P regulator) for port 1; code: ZA, ZAY, ZF, ZFY




This pressure regulator regulates the pressure upstream of the valve in duct 1. Ducts 2 and 4 thus have the same regulated pressure. During exhausting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5.

- Advantages
- The pressure regulator is not affected by exhausting, since the pressure is regulated upstream of the valve.
- The pressure regulator can always be adjusted, since the pressure from the valve terminal is always present.
- [1] Duct 3 (exhaust air)
- [2] Duct 1 (supply air)
- [3] Duct 5 (exhaust air)

Application examples

- An equal working pressure is required at working ports 2 and 4.
- A working pressure (e.g. 3 bar) lower than the operating pressure present at the valve terminal (e.g. 8 bar) is required.

Mode of operation of the pressure regulator plate (AB regulator) for ports 2 and 4; code: ZD, ZDY, ZI, ZIY

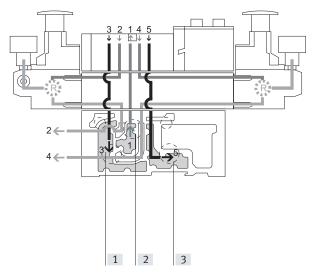

This pressure regulator regulates the pressure in ducts 2 and 4 after the pressure medium flows through the valve.

During exhausting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5 via the pressure regulator. Example with the following switching position:
The supply air flows from duct 1 of the manifold sub-base via the valve to duct 2, it is then regulated and made available at port 2 of the manifold sub-base. At the same time, exhausting takes place via duct 4 of the manifold sub-base, via the regulator and via the valve into duct 5 of the manifold sub-base.

- [1] Duct 3 (exhaust air)
- [2] Duct 1 (supply air)
- [3] Duct 5 (exhaust air)

Application examples


• Two different working pressures are required at ports 2 and 4 instead of the valve terminal operating pressure.

Constraints

• The pressure regulator cannot be adjusted in the exhaust position. For example, the pressure regulator for duct 4 cannot be adjusted when the valve is pressurised in the switching position from duct 1 to duct 2 and exhausted from duct 4 to duct 5.

Vertical stacking

Mode of operation of the pressure regulator plate (AB regulator, reversible) for ports 2 and 4, reversible; code: ZE, ZEY, ZJ, ZJY

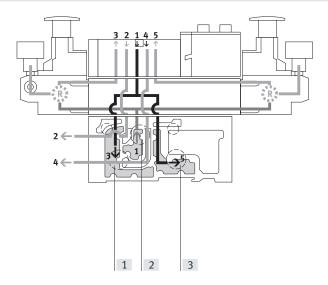

With this pressure regulator, the supply air (duct 1) is split and routed directly to both pressure regulators. In each case the regulated supply air is present in ducts 3 and 5 on the valve. The valve is thus operated in reverse mode.

This means that:

- Duct 3 routes the working pressure to port 2
- Duct 5 routes the working pressure to port 4
- [1] Duct 3 (exhaust air)
- [2] Duct 1 (supply air)
- [3] Duct 5 (exhaust air)

Example with the following switching position:
The supply air in duct 1 is split between ducts 3 and 5 in the regulator and flows from here to the valve. In the valve, the supply air is routed to port 2 of the manifold sub-base. The exhaust air is simultaneously routed via duct 4 of the manifold sub-base and via the valve to regulator duct 1, where it is split between ducts 3 and 5 and then discharged via the manifold sub-baseged via the manifold sub-

Application examples

- Two different pressures are required in ducts 2 and 4 instead of the valve terminal's operating pressure.
- Quick exhausting is required.
- The pressure regulator must always be adjustable.

- Note

• Reversible pressure regulator plates should only be combined with valves that can be operated in reverse mode.

hase.

- Valves in valve positions with vertical pressure shut-off plates are operated with internal pilot air, even when the valve terminal is operated with external pilot air supply.
- The following combination of reversible valve terminals with vertical stacking components is not permitted:
- Reversible pressure regulator plates
- Throttle plates
- Vertical pressure shut-off plates
- Vertical supply plates

Advantages

- · Fast cycle times
- 50% higher exhaust flow rate, as air is not exhausted via the pressure regulator. The load on the pressure regulator is also reduced.
- No quick exhaust valves are required.
- Operating pressure is always present at the pressure regulator, as the pressure is regulated upstream of the valve, i.e. the regulator can always be adjusted.

Disadvantages

- 2x 3/2-way solenoid valves (code N, K, H) cannot be used, as pressure is present at ports 3 and 5.
- A practical combination with a throttle plate is not possible.

Vertical	stacking - Pressure regulator plate,	variants 1)							
Code		Туре	Width				Pressur regulati	e ion up to	Description
			18 mm	26 mm	42 mm	52 mm	6 bar	10 bar	
Pressure	e regulator plate for port 1 (P regula	tor)							
ZA	© 4 2	VABF-SR1C2-C-10	•	•	-	•	_	•	Regulates the operating
ZAY ²⁾		VABF-SR1C2-C-10E	•		•		_	•	pressure in duct 1 upstream
ZF		VABF-SR1C2-C-6	•	•	•		•	_	of the solenoid valve
ZFY ²⁾		VABF-SR1C2-C-6E							
	14 5 1 3 12		-	•	•	•	•	_	
Pressure	e regulator plate for port 2 (B regula	tor)							
ZC		VABF-SR2C2-C-10	•		•	•	_	•	Regulates the operating
ZCY ²⁾	4 2	VABF-SR2C2-C-10E			-	•	_	•	pressure in duct 2
ZH		VABF-SR2C2-C-6		•	-	•	-	_	downstream of the solenoid
ZHY ²⁾		VABF-SR2C2-C-6E						_	valve
	14 5 1 3 12								
Pressure	e regulator plate for port 4 (A regula	tor)			-				
ZB ²⁾		VABF-SR3C2-C-10			-	•	_	•	Regulates the operating
ZG ²⁾	4 2	VABF-SR3C2-C-6	_	_	_		_		pressure in duct 4 downstream of the solenoic valve
	14 5 1 3 12		_	_	_	-	_		
Pressure	e regulator plate for ports 2 and 4 (A	AB regulator)							
ZD	\odot	VABF-SR4C2-C-10	•		•		_	•	Regulates the working
ZDY ²⁾	1 14 12 1	VABF-SR4C2-C-10E							pressure in ducts 2 and 4
			•	•	•	•	-	•	downstream of the solenoid valve
ZI		VABF-SR4C2-C-6	-	•	-	•	•		- 🖣 - Note
ZIY ²⁾	14 5 1 3 12	VABF-SR4C2-C-6E		•		•		_	These pressure regulator plates cannot be combined with reversible 2x 3/2-way solenoid valves (code P, Q, R).

 $^{1) \}quad \text{Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2}$

 $^{2) \}quad \hbox{Also suitable for valves with symmetrical design}$


Code	stacking – Pressure regulator plate,	Туре	Width					on up to	Description
			18 mm	26 mm	42 mm	52 mm	6 bar	10 bar	
	regulator plate for port 2, reversible	 			_				
ZL		VABF-SR6C2-C-10	•	•	•	•	<u> </u>	•	Reversible pressure
ZLY ²⁾		VABF-SR6C2-C-10E	•	-	•	•	_	-	regulator for port 2
ZN		VABF-SR6C2-C-6	•	•	•	•	•	-	
ZNY ²⁾	14 5 1 3 12	VABF-SR6C2-C-6E			-			_	
Pressure	regulator plate for port 4, reversible	e (A regulator)							
ZK ²⁾	\bigcirc	VABF-SR7C2-C-10		•	-	-	_		Reversible pressure
ZM ²⁾	14 5 1 3 12	VABF-SR7C2-C-6	•	•	•	•	•	_	regulator for port 4
Pressure	regulator plate for ports 2 and 4, re	versible (AB regulator)							
ZE	\odot	VABF-SR5C2-C-10	•	•	•	•	_	•	Reversible pressure
ZEY ²⁾	14 5 1 1 3 12	VABF-SR5C2-C-10E	•	•	•	•	-	•	 regulator for ports 2 and a Pressure regulation upstream of the solenoid valve Routes the operating pressure from duct 1 to ducts 3 and 5 Routes the exhaust air from duct 1 to ducts 3 and 5
ZJ		VABF-SR5C2-C-6	•	•	•	•	•	_	- 🖺 - Note
ZJY ²⁾		VABF-SR5C2-C-6E				•	•	_	These pressure regulator plates cannot be combined with standard 2x 3/2-way solenoid valves (code N, K, H). Reversible 2x 3/2-way solenoid valves (code P, Q, R) must not be operated in a separate pressure zone in combination with these pressure regulators.

¹⁾ Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2

²⁾ Also suitable for valves with symmetrical design

Vertical stacking

Throttle plate



Equipped with two flow control valves at which the exhaust air flow rate at exhaust ports 3 or 5 can be adjusted.

This enables the movement of the drive to be initiated and the required speed to be set on the valve terminal using the manual override.

Ducts 3 and 5 can be adjusted independently of each other.




Note

On reversible valve terminals, the supply air is controlled in ducts 3 and 5 upstream of the valve.

Cod	e	Туре	Width				Description
			18 mm	26 mm	42 mm	52 mm	
X	14 5 1 3 12	VABF-S4F1B1-C	•	•	•	•	Controls the flow of exhaust air downstream of the valve to ducts 3 and 5

Vertical pressure shut-off plate



This is equipped with a switch with which the compressed air supply can be shut off. A solenoid valve or downstream vertical stacking plate can thus be replaced without switching off the overall air supply.

If the control chain has a redundant connection, the cycle can continue even in the case of a cyclical control system.

After the shut-off function has been activated, the exhaust air/return air is discharged from the activated valve. This takes place via an M5 threaded connection or via duct 3 in the case of width 18 and 26 mm, and via duct 3 in the case of width 42 and 52 mm.



Note


The operating pressure of the valve terminal must lie within the range of the required pilot pressure (i.e. min. 3 bar). When using the end plate with pilot air selector, only the switching position with code W and U can be used.

Code		Туре	Width				Description
			18 mm	26 mm	42 mm	52 mm	
ZT	33 1 514	VABF-S4L1D1-C	•	•	_	-	3/2-way valve for shutting off the operating pressure at the valve position Blocks ducts 1 and 14 for the valve position
	12 3 1 5 14	VABF-S2L1D1-C	-	-		•	Supplies the valve position with internal pilot air Pressure separation on the valve assembly
ZS	33 12 3 11 15 14	VABF-SL1D2-C	•	•	-	-	3/2-way valve for shutting off the operating pressure at the valve position Blocks ducts 1 and 14 for the valve position Supplies the valve position with internal pilot air Pressure separation can be shut off on the valve assembly using a key



The vertical pressure shut-off plates VABF-... are provided only in combination with VSVA-...T1L solenoid valves from Festo. In the vertical pressure shut-off plate only ducts 1 and 14 are blocked, and not duct 12.

Vertical supply plate



This plate enables a valve to be supplied with individual operating pressure independently of the operating pressure of the valve terminal.

As additional compressed air supply for a valve. To supply an additional pressure zone.

Code		Туре	Width				Description
			26 mm	18 mm	42 mm	52 mm	
ZU	11 14 5 1 3 12	VABF-SP1A3	•	•	•	•	Plate with port 11 for supplying individual operating pressure to a valve position, duct 1
ZV	11 14 5 1 3 12	VABF-SP1A14	•	•	•	•	Plate with port 11 for supplying individual operating pressure to a valve position, ducts 1 and 14

Compressed air supply and exhausting

Right end plate, internal pilot air supply

Connection size G1/2 right end plate ducts 1/3/5



VTSA/VTSA-F

- Code V (port 14 is not available) VTSA-F-CB
- Code NS

Right end plate, external pilot air supply


Connection size G1/2 right end plate ducts 1/3/5



VTSA/VTSA-F

- Code X
- VTSA-F-CB
- Code NZ

Connection size G3/4 right end plate ducts 1/3/5




VTSA/VTSA-F

 Code V1, V3 (port 14 is sealed with a blanking plug)

VTSA-F-CB

• Code MS

Connection size G3/4 right end plate ducts 1/3/5



VTSA/VTSA-F

- Code X1, X3 VTSA-F-CB
- Code MZ

Right end plate with pilot air selector



VTSA/VTSA-F

- Code Z, Y, W, U
- Code Z: selector position 1, external pilot air supply
- Code Y: selector position 2, internal pilot air supply
- Code W: selector position 3, external pilot air supply (ducted)
- Code U: selector position 4, internal pilot air supply (ducted)

The valve terminal is generally supplied via supply plates (max. 16 per valve terminal) and/or via the right end plate.

VTSA-F-CB

- Code YZ: selector position 1, external pilot air supply
- Code YS: selector position 2, internal pilot air supply

Exhausting is either via silencers or ports for ducted exhaust air on the supply plates and/or on the right end plate.

The valve terminal VTSA/VTSA-F/VTSA-F-CB can be supplied with pressure at one or more points. This is a reliable way of ensuring that all functional components will always offer good performance, even with large-scale extensions.

Compressed air supply and exhaust

Supply plates for VTSA/VTSA-F, exhaust port 3/5 separate



• Code K

Supply plates for VTSA/VTSA-F, exhaust port 3/5 common



• Code L

Supply plates/extension module, pneumatic and electric air supply plate for VTSA-F-CB, exhaust port 3/5 separate



- Code U
- Code UW
- Code UWS

Supply plates/extension module, pneumatic and electric air supply plate for VTSA-F-CB, exhaust port 3/5 common



- Code U
- Code UW
- Code UWS

Additional compressed air supply/duct separation, VTSA/VTSA-F

Additional supply plates can be used to ensure the compressed air supply for larger valve terminals or to create additional pressure zones.

These can be selected at any point upstream or downstream of the manifold sub-bases.

Supply plates contain the ports:

- Compressed air supply (1)
- Exhaust port (3/5) common or separate

Depending on your order, the exhaust ducts are either ducted or exhausted via silencers.

Operation with ducted exhaust air:

When the exhaust air is ducted, exhausting can take place via a supply plate or a right end plate (code V or X).

If duct separation is required, there are a number of different options:

- Duct separation 1, 3, 5: code S
- Duct separation 1: code T
- Duct separation 3, 5: code R

If a combination of duct separation (S, T or R) and one or two supply plates is required, the following variants can be selected:

- Supply plate with duct separation on the left: code SU, TU, RU
- Supply plate with duct separation on the right: code US, UT, UR
- 2 supply plates with intermediate duct separation: code USU, UTU, URU.

Code	/ plates for VTSA/VTSA-F	Туре	Description
U		VABF-S6-10-P1A7-G12 VABF-S6-10-P1A6-G12	Supply plate without duct separation (no R, S or T selected) Exhaust port 3/5 common (not shown) Exhaust port 3/5 separate
SU TU RU			 Supply plate with duct separation on the left, if R, S or T is selected Exhaust port 3/5 common (not shown) Exhaust port 3/5 separate
JS JT JR			 Supply plate with duct separation on the right, if R, S or T is selected Exhaust port 3/5 common (not shown) Exhaust port 3/5 separate
USU UTU URU			 2 supply plates with duct separation in centre, if R, S or T selected Exhaust port 3/5 common (not shown) Exhaust port 3/5 separate

Additional compressed air supply/duct separation, VTSA-F-CB

Additional supply plates can be used to ensure the compressed air supply for larger valve terminals or to create additional pressure zones.

These can be selected at any point upstream or downstream of the manifold sub-bases.

Supply plates contain the ports:

- Compressed air supply (1)
- Exhaust port (3/5) common or separate

Depending on your order, the exhaust ducts are either ducted or exhausted via silencers.

Operation with ducted exhaust air:

With ducted exhaust air, venting can be via a supply plate or a right end plate (code V or X).

If duct separation is required, there are a number of different options:

- Duct separation 1, 14: code TL
- Duct separation 1, 3, 5, 14: code K
- Duct separation 14: code L
- Duct separation 1, 3, 5: code S
- Duct separation 1: code T
- Duct separation 3, 5: code R

Code	Туре	Description
U	VABF-S6-1-P1A7-G12-CB	 Additional pneumatic supply Connecting thread G1/2 Exhaust port 3/5 common
UW	VABF-S6-1-P8A7-G12-CB	Additional pneumatic and electrical supply Connecting thread G1/2 Generation of 24 additional valve addresses (electrical supply is provided internally from Uval) Exhaust port 3/5 common
UWS	VABF-S6-1-P8A7-G12-CB1	Additional pneumatic and electrical supply Connecting thread G1/2 Generation of 24 additional valve addresses (electrical supply is provided from new (safe) voltage zone (internally from S2)) Exhaust port 3/5 common
U	VABF-S6-1-P1A6-G12-CB	Additional pneumatic supply Connecting thread G1/2 Exhaust port 3/5 separate
UW	VABF-S6-1-P8A6-G12-CB	 Additional pneumatic and electrical supply Connecting thread G1/2 Generation of 24 additional valve addresses (electrical supply is provided internally from Uval) Exhaust port 3/5 separate
UWS	VABF-S6-1-P8A6-G12-CB1	 Additional pneumatic and electrical supply Connecting thread G1/2 Generation of 24 additional valve addresses (electrical supply is provided from new (safe) voltage zone (internally from S2)) Exhaust port 3/5 separate

Right end plate

Right end plates with different port sizes are available depending on the flow rate required.

With the following right end plates, the outlet direction of the ports is aligned with the horizontal stacking direction. Right end plates with pilot air supply/pilot exhaust air (VTSA/ VTSA-F)

- Internal pilot air supply: code V, V1 and V3 (ducts 1 and 14 are connected)
- External pilot air supply: code X, X1 and X3, as well as XP1, XP2, XP3 and XS

Right end plates with pilot air supply/pilot exhaust air (VTSA-F-

- Internal pilot air supply: code NS, MS (ducts 1 and 14 are connected)
- External pilot air supply: code NZ, MZ

For end plates with pilot air selector, the outlet direction of the ports is to the front of the valve terminal. This means that all the ports on the valve terminal can be combined in one outlet direction.

The special feature of the end plates with pilot air selector is the selector switch itself, which has four settings for different pilot air supply/pilot exhaust air.

End plates with pilot air selector switch set at the factory for:

- External pilot air supply: selector position 1 (code Z)
- Internal pilot air supply: selector position 2 (code Y)
- External pilot air supply, ducted pilot exhaust air: selector position 3 (code W)
- Internal pilot air supply, ducted pilot exhaust air: selector position 4 (code U)

Note

- The end plate with pilot air selector must be used in combination with a supply plate.
- The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.
- Ducted pilot exhaust air via port 12 is only possible with rotated seals on the valve.

Right end	plate, variants				1	
Code	Code	Blanking plug in duct	Pilot air supply	Ducted pilot exhaust air 1)	Connecting thread	
VTSA/ VTSA-F	VTSA-F-CB			Position of the seal on the solenoid valve (" ISO" is visible)	1, 3, 5	12, 14
V	NS	_	Internal	-	G1/2	G1/4
V1	MS	-		_	G3/4	G1/4
V3	_	-		•	G3/4	G1/4
Χ	NZ	-	External	_	G1/2	G1/4
X1	MZ	_		_	G3/4	G1/4
Х3	-	-		•	G3/4	G1/4
XP1 ²⁾	NZAB	1	External, via soft-start valve	_	G1/2	G1/4
XP2 3)	NZABCB	1, 14	("gradual pressure build-up")	_	G1/2	G1/4
XP3 ³⁾	NZABCBGB	1, 3, 5, 14		_	G1/2	G1/4
XS ⁴⁾	NZCB	14	External, via pilot air switching valve ("switchable pilot air")	-	G1/2	G1/4


- 1) Pilot exhaust air is ducted on the end plate via port 12 and exhausted (done by turning the seal on the solenoid valve to position "ISO")
- 2) Not possible in combination with soft-start valve code PQ, PP, PO (with internal pilot air supply)
- 3) Not possible in combination with soft-start valve code PN, PM, PK (with external pilot air supply)
- 4) Only possible in combination with pilot air switching valve/intermediate plate for switchable pilot air

Right end pl	ate with pilot	air selector			
Code	Code	Pilot air supply	Selector position	Ducted pilot exhaust air 1)	Connecting thread 12, 14
VTSA/ VTSA-F	VTSA-F-CB			Position of the seal on the solenoid valve (" ISO" is visible)	
17	1/7	F. Assessed	1		C1 //
Z	YZ	External	1	_	G1/4
Z Y	YZ YS	External Internal	2	-	G1/4 G1/4
Z Y W	-		1 2 3	- -	,

¹⁾ Pilot exhaust air is ducted on the end plate via port 12 and exhausted (done by turning the seal on the solenoid valve to position "ISO")

End plate,	right			
Code VTSA/ VTSA-F	Code VTSA-F-CB	Type of compressed air supply and	d pilot air supply	Description
Right end	plate (graphica	l representation)		
V	NS NS	600	3 5 12 14	Internal pilot air supply Pilot air supply is branched internally from port 1 Port 14 is not available with code V Port 14 is sealed with a blanking plug for code V1, V3 Exhaust air via ports 3 and 5 For operating pressure in the range 3 10 bar
V1	MS		$\stackrel{\wedge}{\circ}$	Pilot exhaust air via port 12 ¹)
V3	-			V1 cannot be selected in combination with a soft-start valve in the last pressure zone
X X1	NZ MZ	O"	3	External pilot air supply • Pilot air supply between 2 and 10 bar is connected at port 14 • Exhaust air via ports 3 and 5
Х3	-	600	12 14 1	 For operating pressure in the range –0.9 10 bar (suitable for vacuum) Pilot exhaust air via port 12 ¹⁾ X1 cannot be selected in combination with a soft-start valve in the last pressure zone
XP1	NZ	600	3 5 12 14 1	External pilot air supply, compressed air supply via soft-start valve 2) • Port 1 is sealed with a blanking plug • Exhaust air via ports 3 and 5 • Pilot exhaust air via port 12 1)
XP2	NZ	600	3	External pilot air supply, compressed air supply via soft-start valve 2) Internal pilot air supply 14 via soft-start valve Ports 1 and 14 are sealed Exhaust air via ports 3 and 5 Pilot exhaust air via port 12 1)
XP3	NZ		3 5 12 14	External pilot air supply, compressed air supply via soft-start valve 2) Internal pilot air supply 14 via soft-start valve Ports 1, 3, 5 and 14 are sealed Pilot exhaust air via port 12 1)
XS	NZ	600	3 5 12 14 1	External pilot air supply via pilot air switching valve 3) Internal pilot air supply 14 via pilot air switching valve Port 14 is sealed Exhaust air via ports 3 and 5 Pilot exhaust air via port 12 1)

- 1) Ducted pilot exhaust air is only possible with rotated seals on the valve $\,$
- Application with XP1, XP2, XP3 and soft-start valve in combination with valves of width 52 mm: please note the maximum flow rate of the soft-start valve in this pressure zone
- 3) Application with XS and pilot air switching valve in conjunction with intermediate plate/intermediate plate for switchable pilot air

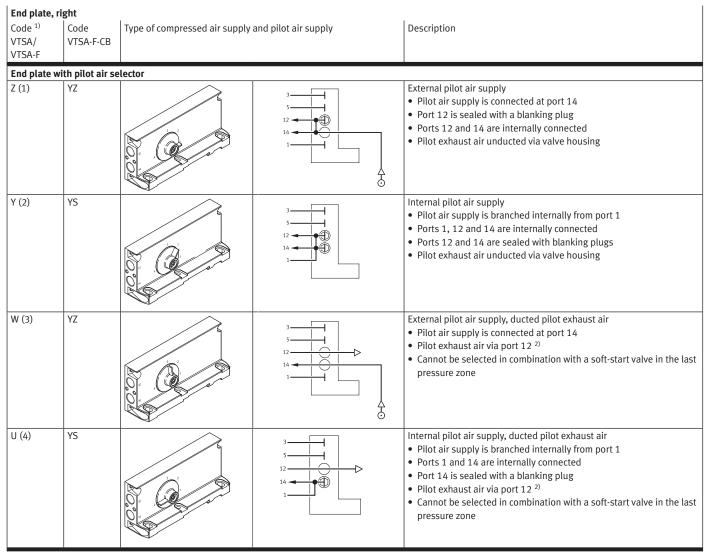

- 1) Selector setting in brackets
- 2) Ducted pilot exhaust air is only possible with rotated seals on the valve (pilot exhaust air 82/84 including venting air for valves)



The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.


Configurat Code VTSA/ VTSA-F	Code VTSA-F-CB	imatic threaded connections		Connection (duct)	Designation	Code M Push-in connector, large	Code N Push-in connector, small
End plate,	right						
V	NS			1	Push-in fitting	QS-G1/2-16	QS-G1/2-12
			3	3 and 5	Silencer	U-1/2-B	U-1/2-B
			12		or Push-in fitting	or QS-G1/2-16	or QS-G1/2-12
			1 -	12	Silencer	U-1/4	U-1/4
					or	or	or
			\$		Push-in fitting	QS-G1/4-10	QS-G1/4-8
Х	NZ	3- 5- 12- 14- 1-	3 5 12	1	Push-in fitting	QS-G1/2-16	QS-G1/2-12
				3 and 5	Silencer	U-1/2-B	U-1/2-B
					Or	or	or
			14	12	Push-in fitting Silencer	QS-G1/2-16 U-1/4	QS-G1/2-12 U-1/4
				12	or	0-1/4 or	0-1/4 or
					Push-in fitting	QS-G1/4-10	QS-G1/4-8
			55	14	Push-in fitting	QS-G1/4-10	QS-G1/4-8
V1	MS			1	Barbed hose fitting	N-3/4-P-19 ¹⁾	_
V3	_		3	3 and 5	Silencer	U-3/4-B	_
			12 14		or	or	
					Barbed hose fitting	N-3/4-P-19 ¹⁾	
				12	Silencer	U-1/4	U-1/4
					or Push-in fitting	or QS-G1/4-12	or QS-G1/4-10
			6	14	Plug	B-1/4	B-1/4
X1	MZ			1	Barbed hose fitting	N-3/4-P-19 ¹⁾	_
Х3	_	1 /4	3	3 and 5	Silencer	U-3/4-B	_
			5 12 14 1		or	or	
				10	Barbed hose fitting	N-3/4-P-19 1)	11.4/4
				12	Silencer	U-1/4	U-1/4
					or Push-in fitting	or QS-G1/4-12	or QS-G1/4-10
			33	14	Push-in fitting	QS-G1/4-12	QS-G1/4-10 QS-G1/4-10
				-'		25 52/ 122	22,7,23

¹⁾ For tubing with I.D. 19 mm. Use tubing clips to DIN 3017

Configurat Code ¹⁾ VTSA/ VTSA-F	tion of all pneur Code VTSA-F-CB	matic threaded connections		Connection (duct)	Designation	Code M Push-in connector, large	Code N Push-in connector, small
End plate Z (1)	YZ YZ	elector	3 5 12	12	Blanking plug	B-1/4	B-1/4
			14 1	14	Push-in fitting	QS-G1/4-10	QS-G1/4-8
Y (2)	YS		3 5 12	12	Blanking plug	B-1/4	B-1/4
			1	14	Blanking plug	B-1/4	B-1/4
W (3)	YZ		3 5 12 14	12	Silencer or Push-in fitting	U-1/4 or QS-G1/4-10	U-1/4 or QS-G1/4-8
				14	Push-in fitting	QS-G1/4-10	QS-G1/4-8
U (4)	YS	3 5 12	12	Silencer or Push-in fitting	U-1/4 or QS-G1/4-10	U-1/4 or QS-G1/4-8	
			1	14	Blanking plug	B-1/4	B-1/4

¹⁾ Selector setting in brackets

Using the seals with ducted/unducted pilot exhaust air

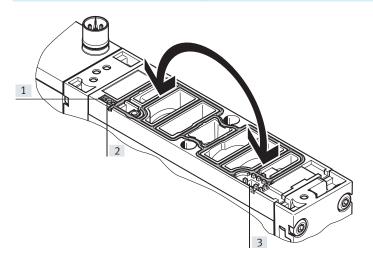

Unducted pilot exhaust air:

- The seal is visible in the display window on control side 14.
- The "ISO" mark is visible on the inscription label on the seal surface.

Ducted pilot exhaust air:

- The seal is visible in the display window on control side 12.
- The "ISO" mark is visible on the inscription label on the seal surface.
- [1] Inscription label
- [2] Display window on control side 14 ("ISO" is visible)
- [3] Display window on control side 12 ("ISO" is visible)

Designation	150	ISO
Pilot exhaust air	Ducted	Unducted (standard)
Display window on	Control side 12	Control side 14
Pilot exhaust port	12	-

Pilot air supply

The port for the pneumatic supply is located on the supply plates or the right end plate.

The ports differ for the following types of pilot air supply:

- Internal
- External

Internal pilot air supply

Internal pilot air supply can be selected if the working pressure is between 3 and 10 bar.

In this case the pilot air supply is branched from the compressed air supply 1 using an internal connection. Port 14 is not available with code V and is sealed with a blanking plug for code V1, V3.

- 🖣 - Note

If a gradual pressure build-up is required in the system by using a softstart valve, then external pilot air should be selected so that the pilot pressure is already applied in full at the point of switch-on.

External pilot air supply

If the supply pressure is less than 3 bar, you must operate your valve terminal VTSA/VTSA-F/VTSA-F-CB using external pilot air supply.

The pilot air supply is then supplied via port 14 on the right end plate. This is the case even if the valve terminal is operated with different pressure zones.


Creating pressure zones and separating exhaust air

The valve terminal VTSA/VTSA-F/VTSA-F-CB offers a number of options for creating pressure zones if different working pressures are required.

Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by appropriate duct separation.

Compressed air is supplied and exhausted via a supply plate. The position of the supply plates and duct separations can be freely selected for VTSA/VTSA-F/VTSA-F-CB.

Duct separations are integrated ex-works as per your order. Duct separations can be distinguished by their coding, even when the valve terminal is assembled.



	Creating pressure zones							
Code	Separating seal			Width				Description
	Illustrated examples	Coding	Basic representation	18 mm	26 mm	42 mm	52 mm	
T			7 5 12 14	-		•		Duct 1 separated
S	5 1 3		5 5 12 14	•	•	•	•	Ducts 1, 3 and 5 separate
R			3	-		•	-	Ducts 3 and 5 separate
TL		Colour-coded in red	7L 3 5 12 14 1	-	•	-	•	Duct 1 and 14 separated
К	5 1 3	Colour-coded in green	5	-	•	-	•	Ducts 1, 3, 5 and 14 separate
L		Colour-coded in white	12 14	•	•	•	•	Duct 14 separated

Example: Compressed air supply and pilot air supply, right end plate

Internal pilot air supply, silencer/ducted exhaust air

Right end plate: code V and V1

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply:

- Port 14 is not available with code V and is sealed with a blanking plug for code V1.
- The air is exhausted via the silencer at exhaust port 3/5.
- Duct separations can optionally be used to create pressure zones.

Optional duct separation

Example: Compressed air supply and pilot air supply, right end plate


External pilot air supply, silencer/ducted exhaust air

Right end plate: code X and X1

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply:

- Port 14 on the right end plate is equipped with a fitting for this.
- The air is exhausted via the silencer at exhaust port 3/5.
- Duct separations can optionally be used to create pressure zones.

Optional duct separation

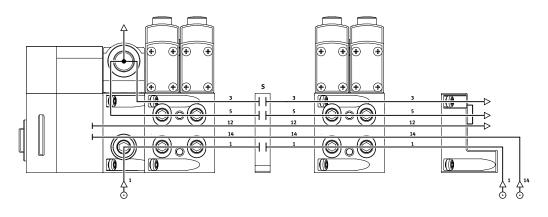

Key features – Pneumatic components – Compressed air supply and pressure zones, examples

Example: Compressed air supply and pilot air supply via end plate with pilot air selector


Internal pilot air supply, ducted exhaust air/silencer

Right end plate: code U

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply:

- Port 14 on the right end plate is tightly sealed.
- The air is ducted or discharged via the silencer at exhaust port 3/5.
- The selector switch on the pilot air selector is in position 4.
- Duct separations can optionally be used to create pressure zones.

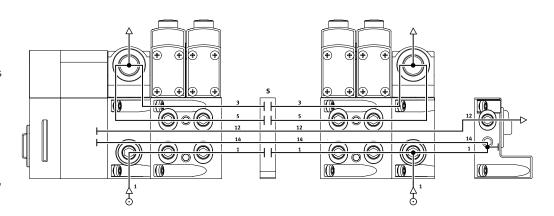

Example: Compressed air supply and pilot air supply via end plate with pilot air selector


External pilot air supply, ducted exhaust air/silencer

Right end plate: code Z

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply:

- Port 14 on the right end plate is equipped with a fitting for this.
- Port 12 is sealed with a blanking plug since it is internally connected with port 14.
- The air is ducted or discharged via the silencer at exhaust port 3/5.
- The selector switch on the pilot air selector is in position 1.
- Duct separations can optionally be used to create pressure zones.

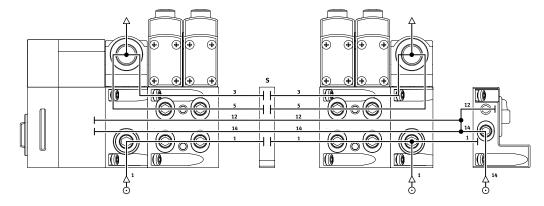


Key features – Pneumatic components – Compressed air supply and pressure zones, examples

Examples: Creating pressure zones

VTSA/VTSA-F/VTSA-F-CB with CPX terminal

With the VTSA/VTSA-F/VTSA-F-CB up to 16 pressure zones can be created (up to 32 pressure zones if only size 1, ISO 5599-2, is fitted). The diagram shows an example of the configuration and connection of three pressure zones using duct separations – with internal pilot air supply.

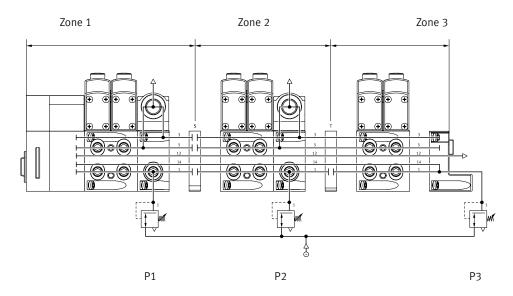



Examples with pressure zones and soft-start valve are described separately in the chapter "Soft-start valve" a page 193.

Key features - Mounting

Valve terminal mounting


Sturdy valve terminal mounting thanks to:

- Through-holes for wall mounting
- Additional mounting brackets
- DIN rail mounting for VTSA/ VTSA-F (horizontal mounting position permitted)



Further information on mounting the valve terminal, arranged by valve terminal configuration, can be found online.

Wall mounting, general

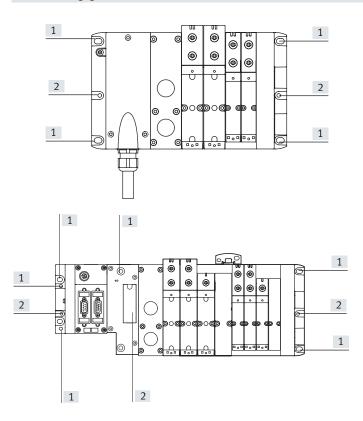

- [1] Drilled hole for M6 screw
- [2] Drilled hole for DIN rail mounting

The valve terminal VTSA/VTSA-F/ VTSA-F-CB is screwed onto the mounting surface using M6 screws. The mounting holes are located at the following points:

- Multi-pin (4 pieces); 2 each on the multi-pin manifold block and the right end plate
- Fieldbus, CPX (6 pieces); 2 each on the left (CPX) and right (VTSA/VTSA-F) end plate and the pneumatic interface
- I-Port/IO-Link[®] (4 pieces); 2 each on the I-Port/IO-Link[®] interface and on the right end plate

Mounting brackets can be mounted on pneumatic supply plates and manifold sub-bases. If using CPX components, see:

→ Internet: cpx


- 🖥 - Note

Wall mounting of the VTSA/ VTSA-F/VTSA-F-CB with more than 5 pneumatic modules Note the following information to avoid damage to the valve terminal:

- Additionally use mounting brackets of the type VAME-6-W-M46
- Mount these on each fourth plate (manifold sub-base, supply plate or exhaust plate), counting from left to right, starting after the pneumatic interface.
- No mounting bracket is required next to the right end plate.
- Always use the pre-assembled mounting brackets when mounting factory preassembled valve terminals on a wall.

Key features - Mounting

Wall mounting with CPX polymer interface

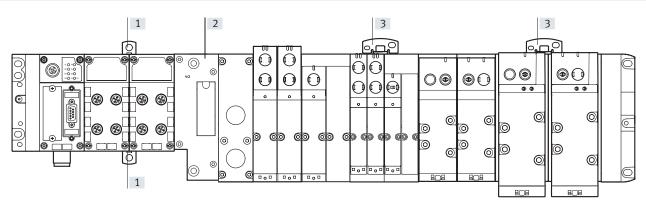

- [1] Additional wall mounting for polymer CPX terminal
- [2] Pneumatic interface

In the case of polymer CPX terminals with 4 and more interlinking blocks, additional wall mountings of the type CPX-BG-RW must be used every 100 ...150 mm. These mountings are clipped in at the top and bottom between the CPX modules.


- [3] Additional wall mounting for VTSA/VTSA-F/VTSA-F-CB
- (with drilled hole for M5 and M6 screw)

In the case of the VTSA/VTSA-F/VTSA-F-CB, mounting brackets must be mounted on the wall as indicated above.

Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

Key features – Mounting

Wall mounting with CPX metal interface

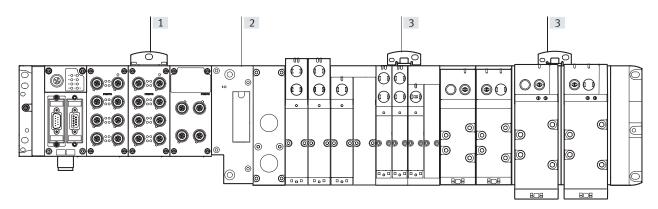

- [1] Additional wall mounting for CPX metal design
- [2] Pneumatic interface


In the case of metal CPX terminals with 4 and more interlinking blocks, additional wall mountings of the type CPX-M-BG-RW must be used every 100 ...150 mm. These wall mountings are screwed in at the top of the corresponding CPX module.

- [3] Additional wall mounting for VTSA/VTSA-F/VTSA-F-CB
- (with drilled hole for M5 and M6 screw)

In the case of the VTSA/VTSA-F/VTSA-F-CB, mounting brackets must be mounted on the wall as indicated above.

Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

Mounting on support system with CPX metal interface

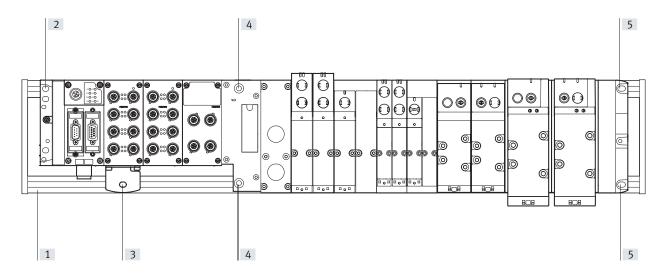


- [1] Support system (DIN mounting rail)
- [2] Upper mounting for metal CPX, left end plate on DIN mounting rail
- [3] Lower mounting for metal CPX on DIN mounting rail with mounting bracket CPX-M-BG-VT-2X
- [4] Mounting for pneumatic interface on DIN mounting rail
- [5] Mounting for right end plate on DIN mounting rail

If a metal terminal CPX with VTSA pneumatic components is mounted on DIN mounting rails, it may be necessary to have one or more mounting brackets on the CPX side to compensate for the length. It is possible to compensate for the length by using special mounting brackets CPX-M-BG-VT-2X. The mounting bracket connects the metal terminal CPX to the DIN mounting rail.

- Note
- Only metal CPX modules with VTSA/VTSA-F/VTSA-F-CB modules of width 18 ... 52 mm must be used.
- The number of mounting brackets required depends on the number of CPX modules installed and whether any system feeds are present.
 Further information about mounting the valve terminal can be found in the assembly instructions in the Festo Support Portal

Key features - Mounting

DIN rail mounting (not permitted for all VTSA-F-CB combinations)



The valve terminal VTSA/VTSA-F/VTSA-F-CB is hooked onto the DIN rail (see arrow A).

The valve terminal VTSA/VTSA-F/VTSA-F-CB is then swivelled onto the DIN rail and secured in place with the clamping element (see arrow B).

To mount the valve terminal VTSA/VTSA-F/VTSA-F-CB on a DIN rail, you will need the mounting kit CPX-CPA-BG-NRH:


This enables the valve terminal to be mounted on a DIN rail to EN 60715.



Note

- Wall mounting is recommended if more than one vertical stacking element or a long valve terminal design is required.
- Vibration/shock loads are not permitted for DIN rail mounting.
- Only horizontal installation is permitted for DIN rail mounting.
- Valve terminals VTSA-F-CB with pneumatic interface with voltage zones are not approved for DIN rail mounting.

Individual valve mounting



[1] Vertical mounting holes

The individual sub-base for wall mounting is designed for integration into a system or machine. It is mounted vertically.

Display and operation

Each solenoid coil is allocated an LED which indicates its switching status.

- Indicator 12 shows the switching status of the pilot control for output 2
- Indicator 14 shows the switching status of the pilot control for output 4

Manual override (MO):

The manual override enables the valve to be switched when not electrically actuated or energised. The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override.


Alternatives:

- The cover cap (code N) limits the function of the manual override, preventing it from being locked. The valve can then only be actuated as nondetenting.
- The cover cap (code V) can be used to secure the manual override against accidental actuation.
- The heavy-duty cover cap protects the manual override located on the valve. The valve can be actuated as nondetenting or as detenting via accessory.



Special valve variants with pre-assembled cover caps for the manual override are available for valve terminal VTSA/VTSA-F/VTSA-F-CB.

Pneumatic connection and control elements

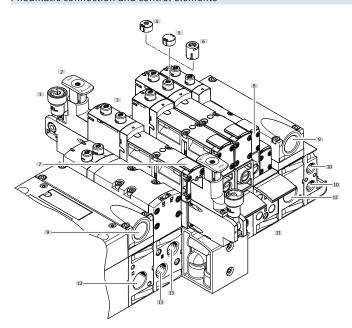

- [1] Pressure gauge (optional)
- [2] Adjusting knob for optional pressure regulator plate
- [3] Manual override (MO) (for each pilot solenoid coil, nondetenting or non-detenting/ detenting)
- [4] Cover cap for MO, nondetenting
- [5] Cover cap for MO, concealed
- [6] Cover cap for MO, nondetenting heavy duty, detenting via accessory
- [7] Inscription label holder for valve
- [8] Adjusting screw of optional throttle plate
- [9] Exhaust ports "Valves" (3/5)


- [10] Pilot ports 12 and 14 for supplying the external pilot air
- [11] Inscription label holder for sub-base
- [12] Supply port 1 (operating pressure)
- [13] Working ports 2 and 4, per valve position

- 🖣 - Note

A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.


Display and operation

Electrical connection and display elements for VTSA/VTSA-F

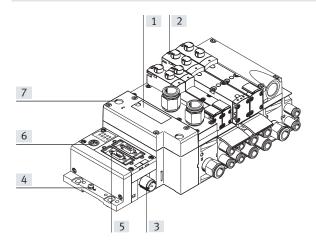


- [1] Inscription area and cover for DIN rail mounting
- [2] Yellow LEDs: signal status indication for the pilot solenoid coils
- [3] Power supply connection
- [4] Earthing connection
- [5] Fieldbus interface (busspecific)
- [6] Service interface for handheld unit, etc.
- [7] Red LED: common error display for valves

Electrical connection and display elements for VTSA-F-CB

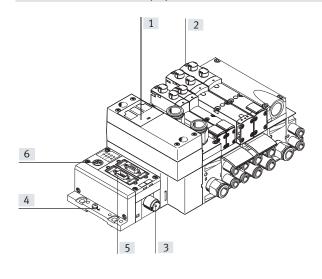

- [1] LED indicators for operating status/diagnostics of the pneumatic interface
- [2] Yellow LEDs: signal status indication for the pilot solenoid coils
- [3] Power supply connection
- [4] Earthing connection
- [5] Fieldbus interface (bus-specific)
- [6] Service interface for handheld unit, etc.


Electrical connection and display elements for AP interface

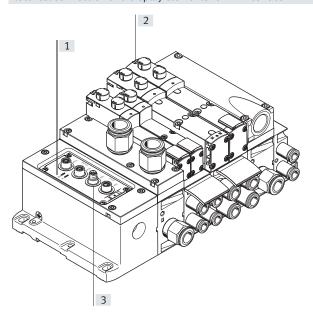

- [1] LED indicators for operating status/diagnostics of the pneumatic interface
- [2] Yellow LEDs: signal status indication for the pilot solenoid coils
- [3] AP interface with connections


Manual override (MO) - Function

MO with automatic return (non-detenting)



- [1] Press in the plunger of the manual override using a pointed object or screwdriver. The valve is in the switching position.
- [2] Remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The valve returns to its normal position (not with double solenoid valve code J or D).

MO with locking (detenting)




- [1] Press in the plunger of the manual override using a pointed object or screwdriver until the valve switches and then turn the plunger 90° clockwise until the stop is reached. Valve remains in the
 - switching position.
- [2] Turn the plunger 90° anticlockwise until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The valve returns to its normal position (not with double solenoid valve code J or D).


Cover caps for manual override

Cover cap for MO, heavy-duty, with automatic reset (non-detenting/ detenting via accessory)



[1] Non-detenting: Push in key for MO. The valve is in the switching position. Detenting: Turn the coded key in switching position 90° clockwise until the stop is reached. Valve remains in the switching position. In this position the key is latched and cannot be removed.






[1] Restricted function, nondetenting: push in the plunger of the MO cap using a pointed object or screwdriver. The valve is in the switching position.



[2] Turn the key 90° anticlockwise until the stop is reached. The key is now unlatched. The spring force of the manual override pushes the key back out. The valve returns to its normal position (not with double solenoid valve code J or D).



[2] Remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The valve returns to its normal position (not with double solenoid valve code J

or D).

Cover cap for MO, concealed



When concealed by the cover cap, the MO can be secured against accidental actuation.



Note

Cover caps for the manual override can be ordered separately as accessories.

There are also variants of the VSVA valve with ready-fitted cover caps.

Overview of valve variants a	nd cover cap	os for manual override (MO)		
Illustration	Terminal code	Description of valve terminal order code	Manual override (MO)	Valve code identification on the rating plate sticker1)
Solenoid valve VSVA withou	it cover cap			
	R	Without cover cap on MO	Non-detenting, detenting	VSVA-BMZD
Solenoid valve VSVA with re	ady-fitted co	over cap on MO		
	В	MO non-detenting/heavy duty with cover cap, can be used as detenting via accessory (key), as valve variant	Non-detenting, detenting via accessory (key)	VSVA-BMZTR
	С	MO can only be used as non-detenting with coded cover cap, as valve variant	Non-detenting	VSVA-BMZH
	D	MO concealed by cover cap – operation of MO prevented, as valve variant	Concealed	VSVA-BMZ
Cover caps for MO				
	N	MO can only be used as non-detenting with coded cover cap	Non-detenting	VSVA-BMZD
	V	MO concealed by cover cap – use of MO prevented	Concealed	VSVA-BMZD
	A	MO non-detenting/heavy duty with cover cap, detenting via accessory (key)	Non-detenting, detenting via accessory	VSVA-BMZD
Accessories for manual over	ride, heavy			
	-	Coded key (accessory) for actuating the MO, non-detenting/ heavy duty, for detenting position	For manual override, detenting	-

¹⁾ As an example, the part code for a 5/2-way single solenoid valve, mechanical spring return is used here (e.g. VSVA-B-M52-MZTR-A2-1T1L)



cannot be guaranteed.

Cover caps for non-detenting/heavy duty manual override, detenting via accessory, are provided for one-off use only.

If they are used more than once, reliable locking of the cover cap

Key features – Display and operation, VTSA-F-CB

Illustration	Terminal	Description of valve terminal order code	Manual override (MO)	Valve code identification on the rating plate sticker1)
			(MO)	the rating plate stickers)
Solenoid valve VABF, va			N 1	LADECA A VADA CAA
	ZQN	MO can only be used as non-detenting with coded cover cap, as valve variant	Non-detenting	VABF-S4-2-V2B1-G38
	ZQR	Non-detenting MO, can be used as detenting, as valve variant	Non-detenting, detenting without accessories	VABF-S4-2-V2B1-G38
	ZQV	MO concealed by cover cap – operation of MO prevented, as valve variant	Concealed	VABF-S4-2-V2B1-G38
	ZQA	MO non-detenting/heavy duty with cover cap, can be used as detenting via accessory (key), as valve variant	Non-detenting, detenting via accessory (key)	VABF-S4-2-V2B1-G38
Solenoid valve VABF, so	oft-start valve			
	ZQZ	The manual override can be reset in two ways: • manually or • electrically via control signal	Detenting, electrically self- resetting	VABF-S6-1-P5A4 YE
	ZQX	Manual override, concealed	None	VABF-S6-1-P5A4 S
Solenoid valve VSVA, p	ilot air switching	valve		
	-	The manual override can be reset in two ways: • manually or • electrically via control signal	Detenting, electrically self- resetting	VSVA-BT-M32CS YE
	ZX	Non-detenting manual override	Non-detenting	VSVA-BT-M32CS MH
	ZZ	Manual override, concealed	None	VSVA-BT-M32CS S
Accessories for manual	override heavy	lutv		
A CONTRACTOR MAINTAIL	_	Coded key (accessory) for actuating the MO, non-detenting/	For manual override,	_
		heavy duty, for detenting position	detenting	

¹⁾ As an example, the part code for a 5/2-way single solenoid valve, mechanical spring return is used here (e.g. VSVA-B-M52-MZTR-A2-1T1L)




- Note

Cover caps for non-detenting/heavy duty manual override, detenting via accessory, are provided for one-off use only.

If they are used more than once, reliable locking of the cover cap cannot be guaranteed.

Key features - Electrical components

Inscription system

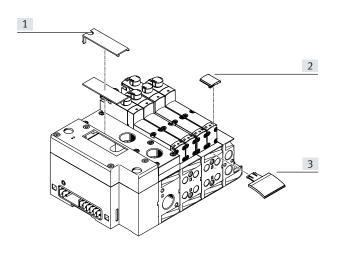

- [1] Inscription area (approx. 20 x 45 mm)
- [2] Inscription label holder for valve ASCF-T-S6 (17 x 12.5 mm), ASCF-T-S6-Z
- [3] Inscription label holder for manifold sub-base ASCF-M-S6, ASCF-M-S2-2

Inscription label holders can be applied to the valves and manifold sub-bases to identify them. They can be ordered by entering the code B or T in the order code for accessories.

Scope of delivery: inscription label holder including inscription label.

The following inscription labels can be used as spares:

- Inscription label holder for valve type ASCF-T-S6: part no. 540888
- Inscription label holder with additional fields for marking valve type ASCF-T-S6-Z: part no. 8106532


- Inscription label holder for manifold sub-base type ASCF-M-S6: part no. 540889
- Inscription label holder for manifold sub-base (for valve width 52 mm) type ASCF-M-S2-2: part no. 562577

Large inscription labels can be attached to the pneumatic interface as an alternative or in addition to the smaller labels.

Protective circuit

Each solenoid coil VSVA is provided with a spark arresting protective circuit and protected against polarity reversal. The version with width 52 mm also has integrated holding current reduction.

Width 18 to 42 mm

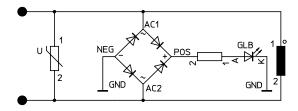


<u> </u>

Note

- All control signals of the solenoid coils of a valve terminal share a common load (independent of whether multi-pin, AS-i or CPX).
- With the valve terminal VTSA-F-CB, the common load always refers to a common voltage zone.
- A configuration combining VTSA/VTSA-F and VTSA-F-CB is not permitted.

Width 52 mm

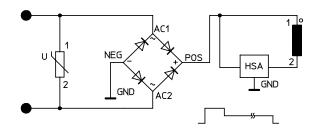

Individual valve

Valves on individual sub-bases can be used for actuators that are further away from the valve terminal.

- Electrical connection M12, 4-pin
 24 V DC
- 4-pin clamped terminal connection for configuration by the user 24 V DC
- Cable (open end) for configuration by the user 24 V DC

Individual electrical connection

A maximum of 20 solenoid coils can be actuated. 2 solenoid coils per valve can be addressed.

Individual electrical connection:

- M12
- 6-way or 10-way
- 5-pin
- 24 V DC

Electrical multi-pin plug connection

The following multi-pin plug connection variants are offered for the valve terminal VTSA/VTSA-F:

- Sub-D multi-pin plug connection (37-pin): This valve terminal can be equipped with 1 ... 16 valve positions (with double solenoid valves), or with 1 ... 32 valve positions (with single solenoid valves). A maximum of 32 solenoid coils can be actuated.
- Terminal box (terminal strip):
 This valve terminal can be equipped with 1 ... 16 valve positions (with double solenoid valves), or with 1 ... 32 valve positions (with single solenoid valves).

A maximum of 32 solenoid coils can be actuated.

 Multi-pin node (round plug): electrical multi-pin plug connection with round plug, 19-pin to CNOMO E03.62.530.N, connecting thread M23 for 24 V DC. The valve terminal can be fitted with max. 16 solenoid coils.

The valves are switched by positive or negative logic (PNP or NPN). Mixed operation is not permissible because all control signals of the solenoid coils of a valve terminal share a common load.

Each pin on the multi-pin plug (Sub-D) or terminal box (terminal strip) can actuate exactly one solenoid coil. If the maximum configurable number of valve positions is 32, this means that 32 valves can be addressed, each with a single solenoid coil. With 16 or fewer valve positions, 2 solenoid coils per valve can be addressed.



Note

Use the following 37-pin connecting cables from Festo to connect the valve terminal VTSA/VTSA-F with Sub-D multipin plug connection:

- NEBV-...-LE10 for max. 8 solenoid coils
- NEBV-...-LE26 for max. 22 solenoid coils
- NEBV-...-LE27 for max. 23 solenoid coils
- NEBV-...-LE37 for max. 32 solenoid coils
- NECV-S1W37 pre-assembled plug connector

AS-Interface connection

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils.

The valve terminal with AS-Interface connection is based on the same electrical links as the valve terminal with multi-pin plug connection. This means a valve terminal with multi-pin plug connection can be converted using an AS-Interface module.

The technical specifications of the AS-Interface system must be observed in this case.



Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if max. 4 solenoid coils (width 52 mm) are simultaneously supplied with current.

More information can be found at:

→ Internet: as-interface

Fieldbus interface/control block

All functions and features of the electrical peripherals CPX are permitted in connection with the CPX interface. This means that:

- The valves and electrical outputs are supplied via the operating voltage connection CPX
- The valves are supplied and switched off independently via a separate connection on the CPX



Note

More information can be found at:

→ Internet: cpx

I-Port/IO-Link®

Valve terminals VTSA/VTSA-F with I-Port/IO-Link® connection can be expanded with up to 16 valves with max. 32 solenoid coils.

The valve terminal with I-Port/IO-Link® connection is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multi-pin plug connection can be converted using an I-Port/IO-Link® module.

The technical specifications of the I-Port/IO-Link® system must be observed in this case.

- 🎚

Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if max. 4 solenoid coils (width 52 mm) are simultaneously supplied with current.

More information can be found at:

→ Internet: i-port, io-link

AP interface

VTSA/VTSA-F valve terminals with AP interface can be expanded with up to 12 valves with a maximum of 24 solenoid coils. The valve terminal with AP interface is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multi-pin plug connection can be converted using an AP interface. The technical specifications of the AP interface must be observed in this case.



Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if max. 4 solenoid coils (width 52 mm) are simultaneously supplied with current.

More information can be found at:

→ Internet: ap

Rules for addressing

Address allocation

Address allocation doesn't depend on whether single or double solenoid valves are fitted. Addresses are assigned in ascending order without gaps, from left to right.

Single solenoid valve

A valve position for actuating one solenoid coil (VABV...T1) occupies one address.

Double solenoid valve

A valve position for actuating two solenoid coils (VABV...T2) occupies two addresses. The following allocation applies in this case:

- Coil 14: lower-value address
- Coil 12: higher-value address

Connecting cable

The wire colours refer to the following pre-assembled connecting cables from Festo:

- NEBV-...-LE10 for valve terminal with max. 8 solenoid coils
- NEBV-...-LE26 for valve terminal with max. 22 solenoid coils
- NEBV-...-LE27 for valve terminal with max. 23 solenoid coils
- NEBV-...-LE37 for valve terminal with max. 32 solenoid coils

Pin assignmen	ıt – Multi-pi	in plug, Sub-D	Pin ²⁾	Address/coil	le MP1 Wire colour 1)		Pin 2)	Address/coil	Wire colour 1)
	_		1	0	WH		17	16	WH PK
DIN 4		\	2	1	BN		18	17	PK BN
PIN 1 +		PIN 20	3	2	GN		19	18	WH BU
	0 0		4	3	YE		20	19	BN BU
	0 0		5	4	GY		21	20	WH RD
			6	5	PK		22	21	BN RD
	000		7	6	BU		23	22	GY GN
	0 0		8	7	RD		24	23	YE GY
	000		9	8	GY PK		25	24	PK GN
	000		10	9	RD BU		26	25	YE PK
			11	10	WH GN		27	26	GN BU
	000		12	11	BN GN		28	27	YE BU
			13	12	WH YE		29	28	GN RD
	0 0		14	13	YE BN		30	29	YE RD
DIN 40		PIN 37	15	14	WH GY		31	30	GN BK
PIN 19 +)	16	15	GY BN		32	31	GY BU
<u> </u>			Conduc	tor					
- 🏺 - Note	2		33	0 V ³⁾	YE BK		35	0 V ³⁾	BN BK
The drawing sh	nows a plan	view of the	34	0 V ³⁾	WH BK		36	0 V ³⁾	BK
Sub-D plug soc			Earthin	g				•	•
cable NEBV		· ·	37	FE	VT		_	_	_

¹⁾ To IEC 757

Pin 9 ... 35: not allocated in the case of connecting cable NEBV-...-LE10
 Pin 23 ... 33: not allocated in the case of connecting cable NEBV-...-LE26
 Pin 24 ... 33: not allocated in the case of connecting cable NEBV-...-LE27

³⁾ Connect 0 V for positive-switching control signals, 24 V for negative-switching control signals. Mixed operation is not permissible because all control signals of the solenoid coils of a valve terminal share a common load!

Dimensions Download CAD data → www.festo.com Connecting cable NEBV-S1W37 [1] Cable connector M2Ox1.5 Type B1 H1 H2 H3 L1 L2 NEBV-S1W37 54 41 36 11.6 142 27

Ordering data - Con	Ordering data – Connecting cable, Sub-D, electrical control code MP1					
	Cable sheath	Cable sheath Connecting cable		Part no.	Туре	
			[m]			
<u> </u>	TPE-U(PUR)	For max. 8 solenoid coils, 10-core	2.5	539240	NEBV-S1W37-E-2.5-LE10	
			5	539241	NEBV-S1W37-E-5-LE10	
			10	539242	NEBV-S1W37-E-10-LE10	
		For max. 22 solenoid coils, 26-core	2.5	539243	NEBV-S1W37-E-2.5-LE26	
V			5	539244	NEBV-S1W37-E-5-LE26	
			10	539245	NEBV-S1W37-E-10-LE26	
		For max. 32 solenoid coils, 37-core	2.5	539246	NEBV-S1W37-K-2.5-LE37	
			5	539247	NEBV-S1W37-K-5-LE37	
			10	539248	NEBV-S1W37-K-10-LE37	
	PVC	For max. 8 solenoid coils, 10-core	2.5	543271	NEBV-S1W37-KM-2.5-LE10	
			5	543272	NEBV-S1W37-KM-5-LE10	
			10	543273	NEBV-S1W37-KM-10-LE10	
		For max. 23 solenoid coils, 27-core	2.5	543274	NEBV-S1W37-KM-2.5-LE27	
			5	543275	NEBV-S1W37-KM-5-LE27	
			10	543276	NEBV-S1W37-KM-10-LE27	
		For max. 32 solenoid coils, 37-core	2.5	543277	NEBV-S1W37-KM-2.5-LE37	
			5	543278	NEBV-S1W37-KM-5-LE37	
			10	543279	NEBV-S1W37-KM-10-LE37	

	Terminal	Coil/address	Terminal	Coil/address
ach solenoid coil is assigned to a specific terminal on the rminal strip in order for the valves to be actuated.				
	1	0	17	16
	2	1	18	17
0 19	3	2	19	18
	4	3	20	19
┎ ╷┈┈┈┈┈┈┈┈ ╢	5	4	21	20
	6	5	22	21
	7	6	23	22
	8	7	24	23
	9	8	25	24
	10	9	26	25
	11	10	27	26
0V¹) 20 31	12	11	28	27
04 20 31	13	12	29	28
	14	13	30	29
	15	14	31	30
	16	15	32	31
- Note	Conductor			
e drawing shows a plan view of the multi-pin terminal st	rip 33	0 V	35	0 V
age Clamp).	34	0 V	36	0 V


Pin assignment – Multi-pin, round plug; electrical control code MP4							
	Address	Pin ¹⁾		Address	Pin ¹⁾		
	0	15		8	17		
	1	7		9	9		
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	2	5		10	2		
4+ + + + + + + + + + + + + + + + + + +	3	4		11	13		
$\left(\left(\frac{3 + \frac{4}{43} + \frac{49}{47} + 9}{48} \right) \right)$	4	16		12	11		
$\frac{1}{2} + \frac{1}{2} + \frac{1}{2} = \frac{1}$	5	8		13	10		
12 11	6	3		14	1		
	7	14		15	18		


Pin assignment – Multi-pin plug, round plug; electric	al actuation – CNOMO al	location		
	Pin	Valve position/ solenoid coil	Pin	Valve position/ solenoid coil
	1	8/14	10	7/12
	2	6/14	11	7/14
	3	4/14	12	FE
110 12O 10 2	4	2/12	13	6/12
/ //10 17 ₀ 19 0 3	5	2/14	14	4/12
	6	0 V ¹⁾	15	1/14
	7	1/12	16	3/14
O7 O6 O5	8	3/12	17	5/14
	9	5/12	18	8/12
			19	Not assigned

¹⁾ Pin 6: 0 V for positive-switching control signals; connect 24 V for negative-switching control signals; mixed operation is not permitted! Pin 12: earth

Pin 19: not allocated

Electrical connection, individual valve with connector plug M12 up to width 52 mm





[1] Plug M12x1, 4-pin to EN 61076-2-101

Pin allocation M12 on individual valve to ISO 20401

With positive logic:

Pin1 - Not allocated

Pin2 - U_B for coil 12

Pin3 - 0 V for coil 12 and 14

Pin4 - U_B for coil 14

With negative logic:


Pin1 - Not allocated


Pin2 - 0 V for coil 12

Pin3 - U_B for coil 12 and 14

Pin4 - 0 V for coil 14

Electrical connection, individual valve terminal strip up to width 52 mm





Pin assignment for assembly by

the user

With positive logic:

Pin1 - Not allocated

Pin2 - U_B for coil 12

Pin3 - 0 V for coil 12 and 14

Pin4 - U_B for coil 14

With negative logic:


Pin1 - Not allocated


Pin2 - 0 V for coil 12

Pin $3 - U_B$ for coil 12 and 14

Pin4 - 0 V for coil 14

Individual electrical connection, 6-way or 10-way, code MP2/MP3 for valve terminal up to width 52 mm





[1] Plug M12x1, 5-pin

Pin assignment M12

With positive logic: Pin1 - Not allocated

Pin2 - U_B for coil 12

Pin3 - 0 V for coil 12 and 14

Pin4 - U_B for coil 14

Pin5 - Functional earth

Pin assignment M12

With negative logic:

Pin1 - Not allocated

Pin2 - 0 V for coil 12 Pin $3 - U_B$ for coil 12 and 14

Pin5 - Functional earth



- · Mixed operation of positive-switching (PNP) and negativeswitching (NPN) control signals is not permissible because all control signals of the solenoid coils of a valve terminal share a common load.
- All M12 connections (MP2/MP3) within a valve terminal share a common load.

Instructions for use

Operating materials

Operate your system with unlubricated compressed air, if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life. The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate the entire system with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the actuator requiring them.

Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal.

Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40 °C).

Bio-oils

When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m3 must not be exceeded (see ISO 8573-1:2010 Class 2).


Mineral oils

When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alphaolefins (PAO), the maximum residual oil content of 5 mg/m3 must not be exceeded (see ISO 8573-1:2010 Class 4). A higher residual oil content is not permitted, regardless of the compressor oil, because the permanent lubrication would otherwise be flushed out over a period of time.

Valve terminals VTSA

Datasheet - AP interface

Control signals from the controller to the valve terminal are transmitted via the AP bus protocol from Festo.

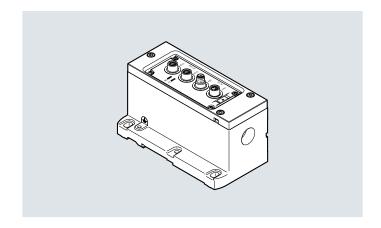

Application

The AP interface connects the VTSA valve terminal with up to 12 valves (24 valve coils) to a CPX-AP system.

Implementation

The AP interface is used for direct integration of the VTSA valve terminal into the decentralised IO system.

General technical data					
AP interface					
Connection position	On top				
Reverse polarity protection	Yes				
Number of pins/cores	4				
Maximum number of valve positions	12				
Max. no. of solenoid coils	24				

Datasheet – AP interface

General data				
Diagnostics via LED	Diagnostics per module			
	Power supply load			
Diagnostics via internal communication	Load switch-off			
	Electronics/sensors overvoltage			
	Undervoltage load			
Module parameters	Configuration of voltage monitoring load supply PL			
	Response in error state			

Technical data – Electrics				
Nominal operating voltage	[V AC]	110		
	[V DC]	24		
Nominal operating voltage for electrics/sensors	[V DC]	24		
Nominal operating voltage, load	[V DC]	24		
Permissible voltage fluctuations, electrics/sensors	[%]	± 25		
Permissible voltage fluctuations, load	[%]	± 10		
Intrinsic current consumption of electrics/sensors	[mA]	Typ. 34 mA		
Intrinsic current consumption of load	[mA]	Typ. 16 mA		
Max. power supply	[A]	2 x 4 A (external fuse required)		
Power failure buffering	[ms]	10		
Mains buffering of load	[ms]	3		
Fuse protection (short circuit)		Internal electronic fuse per channel		
Power supply				
Function		Incoming electronics/sensors and load		
Connection type		Plug		
Connection technology		M8x1, A-coded		
Number of pins/cores		4		
Voltage transmission				
Function		Outgoing electronics/sensors and load		
Connection type		Socket		
Connection technology		M8x1, A-coded		
Number of pins/cores		4		

Technical data – Mechanical components						
Product weight	[g]	712				
Dimensions W x L x H	[mm]	71 x 142 x 84				

Materials					
Cover	Die-cast aluminium				
Threaded sleeve	Nickel-plated brass				
Note on materials	RoHS-compliant				
LABS (PWIS) conformity	VDMA24364-B2-L				

Datasheet – AP interface

Operating and environmental conditions		
Ambient temperature	[°C]	+5 +50
Note on ambient temperature		Note ambient temperature derating to IEC 61131-2:2017
Storage temperature	[°C]	-20 +60
Relative humidity	[%]	5 95
		Non-condensing
Corrosion resistance class CRC ¹⁾	,	2
CE marking (see declaration of conformity) ²⁾		To EU EMC Directive
		To EU RoHS Directive
Certification		RCM
Degree of protection		IP65
Note on degree of protection		In mounted state
		Seal unused connections
Nominal operating altitude	[m]	≤ 2000 NHN
Maximum cable length	[m]	50, system communication
Maximum setup altitude	[m]	3500
Note on the maximum setup altitude		> 2000 m ASL (< 79.5 kPa)
		Note ambient temperature derating to IEC 61131-2:2017

¹⁾ Corrosion resistance class CRC 2 to Festo standard FN 940070


Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements that are in direct contact with a normal industrial environment.

²⁾ More information www.festo.com/catalogue/... \rightarrow Support/Downloads.

Pin allocation			
	Pin	Assignment	Description
M8, D-coded, socket			
AP in (AP-COM)	1	TX-	AP bus, transmission signal positive
1	2	RX+	AP bus, receive signal positive
	3	TX+	AP bus, receive signal negative
4 (0 0) 2	4	RX-	AP bus, transmission signal negative
3			
AP out (AP-COM)	1	RX-	AP bus, transmission signal positive
1	2	TX+	AP bus, receive signal positive
	3	RX+	AP bus, receive signal negative
4 (0 0) 2	4	TX-	AP bus, transmission signal negative
Power out (voltage transmission)	1	24 V PS	Supply voltage for electronics and sensors
	2	0 V PL	Supply voltage for valves and outputs
4 2	3	0 V PS	Supply voltage for electronics and sensors
$3 \bigcirc \bigcirc 1$	4	24 V PL	Supply voltage for valves and outputs
M8, D-coded, plug			
Power In (power supply)	1	24 V PS	Supply voltage for electronics and sensors
	2	0 V PL	Supply voltage for valves and outputs
2 4	3	0 V PS	Supply voltage for electronics and sensors
1 + + 3	4	24 V PL	Supply voltage for valves and outputs

Datasheet – AP interface


Connection and display components



- [1] LED displays for module diagnostics (MD) and power load (PL)
- [2] AP in (AP-COM)
- [3] AP out (AP-COM)
- [4] Power in (power supply)
- [5] Power out (voltage transmission)

Dimensions

Download CAD data → www.festo.com

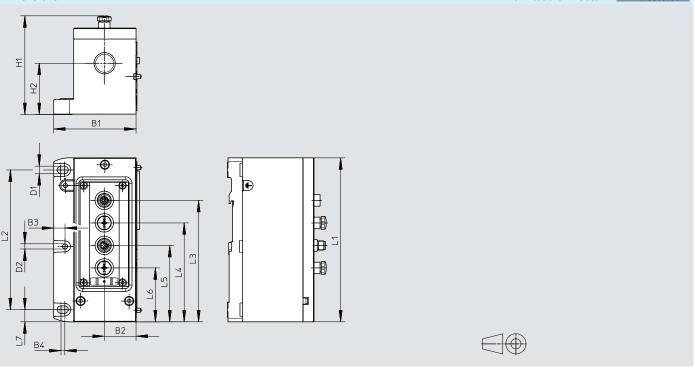

Туре	B1	B2	В3	B4	D1	D2	H1	H2
VABA-S6-1-AP	71.3	27.5	9.8	3	6.6	4.5	85.5	44.4
Туре	L1	L2	L3		L4	L5	L6	L7
VABA-S6-1-AP	142	121	105.2	2 8	5.7	66.2	46.7	10.5

Ordering data – AP interface						
	Description	Part no.	Туре			
0	AP interface for operation in an AP system	8152356	VABA-S6-1-AP			

- **[]** - Valve width to ISO 15407-2

- 18 mm
- 26 mm to ISO 5599-2
- 42 mm
- 52 mm


Voltage 24 V DC



Flow rate¹⁾
Valve width 18 mm:
up to 550 (700) l/min
Width 26 mm: up to
1100 (1350) l/min
Width 42 mm: up to
1300 (1860) l/min
Width 52 mm
up to 2900 l/min



Repair service

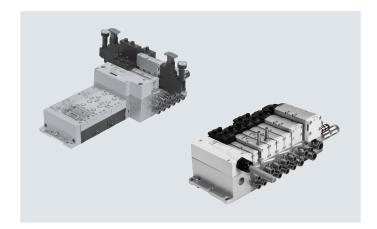

1) Flow rates in brackets apply to VTSA-F

General technical data for V	SA/VTSA	-F			
Terminal type VTSA/VTSA-F		VTSA is the standard version, VTSA-F is the version with optimised flow rate			
Valve sizes		Width 18 mm, 26 mm, 42 mm, 52 mm			
Actuation type		Electrical			
Electrical control		With multi-pin plug: multi-pin, IO-Link®			
		With fieldbus: integrated controller, fieldbus, Industrial Ethernet			
Pilot air supply		Internal/external			
Exhaust function, can be thro	ttled	Via throttle plate			
Type of mounting		Wall mounting			
		On DIN rail to EN 60715			
Mounting position		Any			
Signal status indication		LED			
Manual override		Detenting, non-detenting, concealed			
Suitable for vacuum		Yes			
Valve terminal design		Modular, valve sizes can be mixed			
Max. number of valve positio	ns	32 ¹⁾			
Pneumatic connections – The	eaded cor	nnection			
Pneumatic connection		Via manifold sub-base			
Supply port	1	Dependent on the end plate or supply plate used (and adapter plate when using ISO size 3 valves)			
Exhaust port	3/5	Dependent on the end plate or supply plate used (and adapter plate when using ISO size 3 valves)			
Working ports	2/4	Dependent on the connection type selected			
External pilot air supply port	14	Dependent on the end plate used (and adapter plate when using ISO size 3 valves)			
Pilot exhaust air port	12	Dependent on the end plate used (and adapter plate when using ISO size 3 valves)			

¹⁾ Dependent on the electrical interface and the manifold sub-bases used

Datasheet - Valve terminal VTSA-F-CB

- [] - Valve width

• 18 mm

• 26 mm

• 42 mm

to ISO 5599-2 • 52 mm


Voltage 24 V DC Flow rate¹⁾

Width 18 mm: up to 700 l/min Width 26 mm: up to 1350 l/min Width 42 mm: up to 1860 l/min

Width 52 mm up to 2900 l/min

- 10-

Repair service

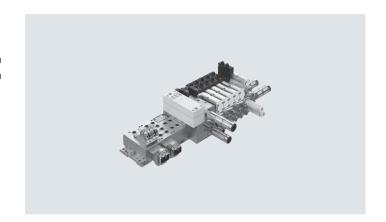

1) Flow rates apply to 5/2-way solenoid valve

General technical data fo	r VTSA-F-CB								
Terminal type CPX/VTSA-F	-CB	Type 46							
Design		Piston spool valve	Piston spool valve						
Valve functions	Valve functions		• 5/2-way solenoid valve						
		• 5/3-way solenoid							
		• 2x 3/2-way soleno							
		• 2x 2/2-way soleno							
				uick exhaust valve, switchable p					
Valve sizes, width	[mm]	18	26	42	52				
Grid dimension	[mm]	38	54	43	59				
Number of valves/plates		2	2	1	1				
To standard		_	-	-	Standardised				
Actuation type		Electrical							
Electrical control		Fieldbus: CPX							
Pilot air supply		Internal/external							
Exhaust function, can be t	hrottled	Via throttle plate							
Type of mounting		Wall mounting							
		On DIN rail to EN 607	715 (not possible in comb	nation with CPX-FVDA-P2 (safe	ty module))				
Mounting position		Any							
Signal status indication		LED							
Manual override		Non-detenting/detenting; non-detenting/concealed; non-detenting-heavy duty/detenting with accessories; self-resetting							
		via electrical control	signal						
Suitable for vacuum		Yes							
Valve terminal design	·	Modular, valve sizes can be mixed							
Note on forced checking		Switching frequency min. once a month							
procedure									
Max. number of valve pos	itions	Max. 24 per voltage zone: max. 4 x 24 = 96							
Number of voltage zones		≤ 6							
Pneumatic connection		Via manifold sub-bas							
Supply port	1	Via right end plate (G1/2 and G3/4) or supply plate or soft-start valve							
Exhaust port	3/5	Via right end plate (0	61/2 and G3/4) or supply	plate or soft-start valve					
Pilot air connection 12		Optional: ducted							
Working ports	2/4	G1/8	G1/4	G3/8	G1/2				
Tubing size: small	[mm]	6	8	10	12				
Tubing size: large	[mm]	8	10	12	16				
Fittings		QS fittings, tubing di	mensions metric or imper	al (hybrid)	·				

¹⁾ If neither solenoid coil is energised, the valve is moved to its mid-position by spring force. If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position

Valve terminals VTSA

Valve function (with valve code)	Terminal	Width 18 mm				Width 26 mm			
	code	Valve	Valve on valve terminal			Valve	Valve on valve terminal		
			VTSA	VTSA-F	VTSA-F-CB		VTSA	VTSA-F	VTSA-F-CB
5/2-way double solenoid (B52)	J	750	550	700	700	1400	1100	1350	1350
5/2-way double solenoid with dominant signal (D52)	D	750	550	700	700	1400	1100	1350	1350
5/2-way single solenoid, pneumatic spring (M52A)	M	750	550	700	700	1400	1100	1350	1350
5/2-way single solenoid, mechanical spring (M52M)	0	750	550	700	700	1400	1100	1350	1350
5/3-way closed (P53C)	G	700	450	650	650	1400 ¹⁾ 700 ²⁾	1000 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾
5/3-way exhausted (P53E)	Е	700 ¹⁾ 330 ²⁾	450 ¹⁾ 330 ²⁾	480 ¹⁾ 330 ²⁾	480 ¹⁾ 330 ²⁾	1400 ¹⁾ 700 ²⁾	1000 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾
5/3-way pressurised (P53U)	В	700 ¹⁾ 330 ²⁾	450 ¹⁾ 330 ²⁾	480 ¹⁾ 330 ²⁾	480 ¹⁾ 330 ²⁾	1400 ¹⁾ 700 ²⁾	1000 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾
5/3-way, exhausted, switching position 14 detenting (P53ED)3)	SA	-	380 ¹⁾ 310 ²⁾	430 ¹⁾ 360 ²⁾	430 ¹⁾ 360 ²⁾	1400 ¹⁾ 700 ²⁾	1000 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾
5/3-way, exhausted, switching position 12 detenting (P53EP)3)	SE	_	380 ¹⁾ 300 ²⁾	460 ¹⁾ 350 ²⁾	460 ¹⁾ 350 ²⁾	1400 ¹⁾ 700 ²⁾	1000 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾	1350 ¹⁾ 700 ²⁾
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)3)	SB	_	380 ¹⁾ 350 ²⁾	440 ¹⁾ 400 ²⁾	440 ¹⁾ 400 ²⁾	700 ¹⁾ 700 ²⁾	700 ¹⁾ 700 ²⁾	700 ¹⁾ 700 ²⁾	700 ¹⁾ 700 ²⁾
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)3)	SD	-	370 ¹⁾ 340 ²⁾	430 ¹⁾ 360 ²⁾	430 ¹⁾ 360 ²⁾	-	850 ¹⁾ 820 ²⁾	950 ¹⁾ 860 ²⁾	950 ¹⁾ 860 ²⁾
2x3/2-way single solenoid, closed (T32C)	K	600	400	550	550	1250	900	1150	1150
2x3/2-way single solenoid, open (T32U)	N	600	400	550	550	1250	900	1150	1150
2x3/2-way single solenoid, open/closed (T32H)	Н	600	400	550	550	1250	900	1150	1150
2x3/2-way single solenoid, closed (T32N)	Q	600	400	550	550	1250	900	1150	1150
2x3/2-way single solenoid, open (T32F)	Р	600	400	550	550	1250	900	1150	1150
2x3/2-way single solenoid, open/closed (T32W)	R	600	400	550	550	1250	900	1150	1150
2x2/2-way single solenoid, closed (T22C)	VC	700	500	650	650	1350	1000	1300	1300
2x2/2-way single solenoid, closed (T22CV)	VV	700	500	650	650	1350	1000	1300	1300

Switching position
 Mid-position
 The valve functions P53ED, P53EP, P53AD and P53BD are only available in the 24 V DC version. Values only apply to 24 V DC.

Valve function (with valve code)	Terminal	Width 42	mm			Width 52 mm			
	code	Valve	Valve on valve terminal			Valve	Valve on va	alve terminal	
			VTSA	VTSA-F	VTSA-F-CB		VTSA	VTSA-F	VTSA-F-CB
5/2-way double solenoid (B52)	J	2000	1300	1860	1860	4000	2900	2900	2900
5/2-way double solenoid with dominant signal (D52)	D	2000	1300	1860	1860	4000	2900	2900	2900
5/2-way single solenoid, pneumatic spring (M52A)	M	2000	1300	1860	1860	4000	2900	2900	2900
5/2-way single solenoid, mechanical spring (M52M)	0	2000	1300	1860	1860	4000	2900	2900	2900
5/3-way closed (P53C)	G	1900 ¹⁾ 950 ²⁾	1200 ¹⁾ 800 ²⁾	1690 ¹⁾ 830 ²⁾	1690 ¹⁾ 830 ²⁾	3600 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾
5/3-way exhausted (P53E)	Е	1900 ¹⁾ 950 ²⁾	1200 ¹⁾ 800 ²⁾	1690 ¹⁾ 830 ²⁾	1690 ¹⁾ 830 ²⁾	3600 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾
5/3-way pressurised (P53U)	В	1900 ¹⁾ 950 ²⁾	1200 ¹⁾ 800 ²⁾	1690 ¹⁾ 830 ²⁾	1690 ¹⁾ 830 ²⁾	3600 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾	2800 ¹⁾ 1700 ²⁾
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)3)	VG	1700 ¹⁾ 700 ²⁾	1400 ¹⁾ 800 ²⁾	1700 ¹⁾ 700 ²⁾	1700 ¹⁾ 700 ²⁾	3000 ¹⁾ 900 ²⁾	2300 ¹⁾ 900 ²⁾	2300 ¹⁾ 900 ²⁾	2300 ¹⁾ 900 ²⁾
2x3/2-way single solenoid, closed (T32C)	К	1600	1200	1300	1300	3000	2400	2400	2400
2x3/2-way single solenoid, open (T32U)	N	1600	1200	1300	1300	3000	2400	2400	2400
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1200	1300	1300	3000	2400	2400	2400
2x3/2-way single solenoid, closed (T32N)	Q	1600	1200	1300	1300	3000	2400	2400	2400
2x3/2-way single solenoid, open (T32F)	Р	1600	1200	1300	1300	3000	2400	2400	2400
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1200	1300	1300	3000	2400	2400	2400
2x2/2-way single solenoid, closed (T22C)	VC	1600	1400	1500	1500	4000	2800	2800	2800
2x2/2-way single solenoid, closed (T22CV)	VV	1600	1400	1500	1500	_	_	_	-


¹⁾ Switching position


²⁾ Mid-position

³⁾ The valve function P53F is only available in the 24 V DC version. Values only apply to 24 V DC.

Flow rate qn as a function of output pressure p2 with pressure regulator plates (P regulator plate) for port 1

6 bar 10 bar

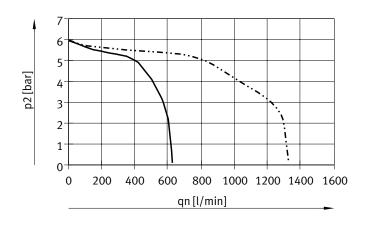


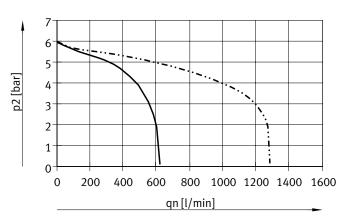


Width 18 mm
----- Width 26 mm

----- Width 18 mm

Input pressure 10 bar, regulated pressure set to 6 bar

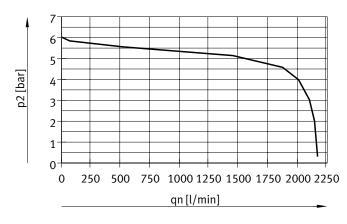

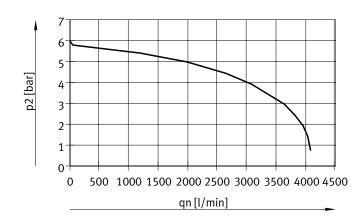



Width 42 mm

Width 52 mm

Flow rate qn as a function of output pressure p2 with pressure regulator plates (AB regulator plates) for port 2, 4 or ports 4/2

6 bar 10 bar

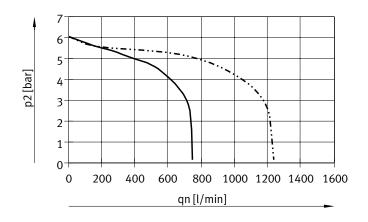


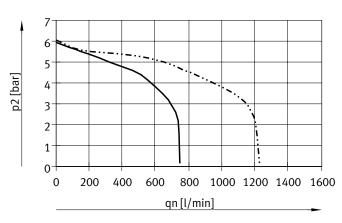


------ Width 18 mm

----- Width 18 mm

Input pressure 10 bar, regulated pressure set to 6 bar

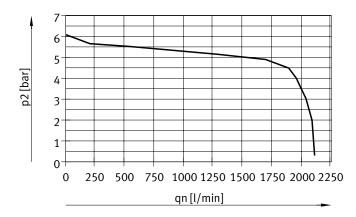

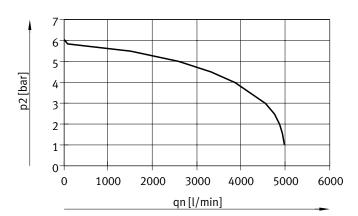



Width 42 mm

Width 52 mm

Flow rate qn as a function of output pressure p2 with pressure regulator plates (AB regulator plates, rev.) for ports 4/2, reversible

6 bar 10 bar

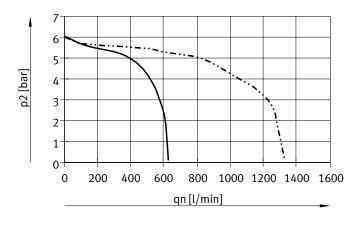


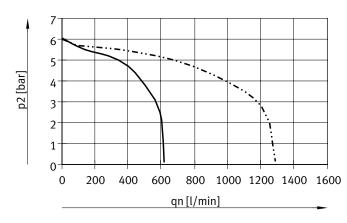


----- Width 18 mm

------ Width 18 mm

Input pressure 10 bar, regulated pressure set to 6 bar

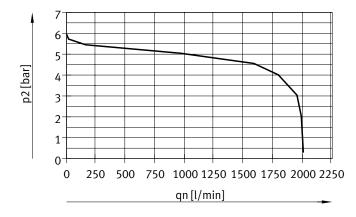


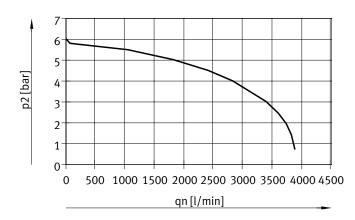


Width 42 mm


Width 52 mm

Flow rate qn as a function of flow control

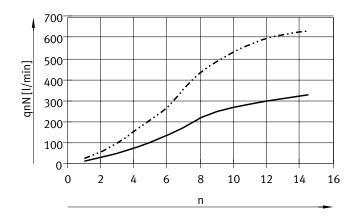

----- Width 18 mm

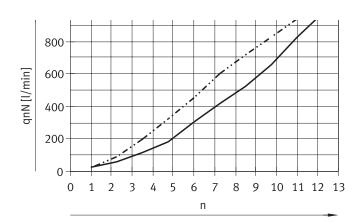

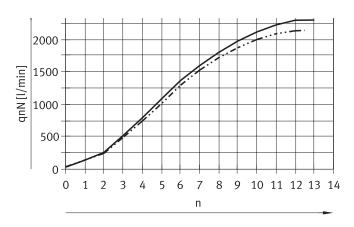

Width 42 mm

Flow control screw from 2 → 3
Flow control screw from 4 → 5

n = revolutions of the adjusting screw

Width 52 mm


Flow control screw from $2 \rightarrow 3$

-·· Flow control screw from $4 \rightarrow 5$


n = revolutions of the adjusting screw

Pilot pressure p12/14 as a function of operating pressure p1

For 3/2-way solenoid valves (T32, T22)

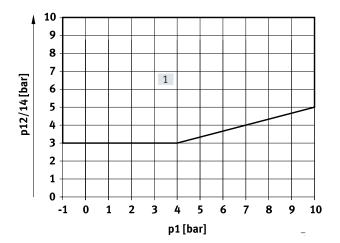

For 5/2-way solenoid valves (M52, B52, D52, P53)

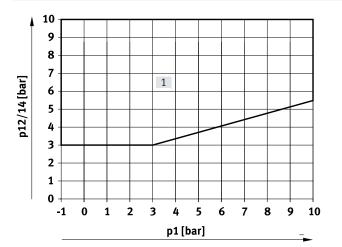

[1] Operating range for valves with external pilot air supply

[1] Operating range for valves with external pilot air supply

Standard nominal flow rate with vertical stacking [l/min]						
Widths	18 mm	26 mm	42 mm	52 mm		
Throttle plate						
VABF-S4-2-F1B1-C	See characteristic curve	_	_	-		
VABF-S4-1-F1B1-C	_	See characteristic curve	-	-		
VABF-S2-1-F1B1-C	-	-	1100	_		
VABF-S2-2-F1B1-C	_	_	-	See characteristic curve		
Vertical supply plate						
VABF-S4-2-P1AG18	430	_	_	-		
VABF-S4-1-P1AG14	-	900	-	_		
VABF-S2-1-P1AG38	_	-	1300	_		
VABF-S2-2-P1AG12	-	-	_	2800		
Vertical pressure shut-off plate						
VABF-S4-2-L1D1-C	400	-	_	-		
VABF-S4-2-L1D2-C 1)	320	-	-	_		
VABF-S4-1-L1D1-C	-	800	_	-		
VABF-S4-1-L1D2-C 1)	-	620	-	-		
VABF-S2-1-L1D1-C	-	-	1200	-		
VABF-S2-2-L1D1-C	-	-	-	1950		

¹⁾ Lockable with key

Operating and environmenta	l conditions			
Туре		VTSA/VTSA-F	VTSA-F-CB	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	Compressed air to ISO 8573-1:2010 [7:4:4]	
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]	Compressed air to ISO 8573-1:2010 [7:4:4]	
Notes on operating/		Lubricated operation possible (in which case lubricated	Lubricated operation not possible	
pilot medium		operation will always be required)		
External	[bar]	-0.9 +10	-0.9 +10	
	[MPa]	-0.09 +1	-0.09 +1	
Internal	[bar]	310	310	
	[MPa]	0.3 1	0.3 1	
Pilot pressure	[bar]	310	310	
	[MPa]	0.3 1	-	
Noise level LpA	[dB(A)]	85	-	
Ambient temperature	[°C]	-5 +50	−5 +50	
Temperature of medium	[°C]	-5 +50	-	
Storage temperature	[°C]	-20 +60	-20 +60	
Relative humidity	[%]	0 90	0 90	
Certification		BIA	-	
		C-Tick	-	
		c UL us – Recognized (OL)	c UL us – Recognized (OL)	
Certificate-issuing authority		-	UL E322346	
CE marking (see declaration of	of conformity)	To EU Low Voltage Directive (only for VTSA-MP)	-	
		To EU EMC Directive 1)	To EU EMC Directive 1)	
		To EU Explosion Protection Directive (ATEX, EX1E3))	-	
KC marking		KC EMC	KC EMC	
ATEX category for gas		II 3G (EX1E ³⁾)	-	
Type of (ignition) protection for	or gas	Ex ec IIC T3 Gc X (EX1E ³⁾)	-	
Explosion-proof ambient temperature	[°C]	-5 +50 (EX1E ³⁾)	-	
Corrosion resistance class CR	C ⁴⁾	0	0	
Corrosion resistance class CR(Link®4)	C for IO-	2	-	

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

²⁾ Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; the operating pressure here is 3 ... 10 bar

³⁾ Certification is valid for VTSA/VTSA-F-MP, VTSA/VTSA-F-FB

⁴⁾ More information www.festo.com/x/topic/crc

Electrical data – Individual electrical connection				
Load voltage supply for valves (Uval)				
Operating voltage	[V DC]	24 ±10%		
Max. total current	[A]	10		
at 24 V DC				
Duty cycle		100%		
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)		

Electrical data – Multi-pin plug connection				
Load voltage supply for valves (Uval)				
Operating voltage	[V DC]	24 ±10%		
Max. total current	[A]	6		
Current rating at 40 °C	[A]	1		
Surge resistance	[kV]	1.5		
Pollution degree		3		
Duty cycle		100%		
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)		

Electrical data – With CPX terminal				
Power supply for electronics (UEL/SEN)				
Operating voltage	[V DC]	24 ±10%		
Max. intrinsic current consumption	[mA]	20		
at 24 V DC				
Duty cycle		100%		
Load voltage supply for valves (Uva	0			
Operating voltage	[V DC]	24 ±10%		
Diagnostic message undervoltage UOFF, load voltage outside the functional range	[V]	21.6 21.5		
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)		

Materials	
Manifold sub-base	Die-cast aluminium
Valve	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Supply plate, supply plate cover	Die-cast aluminium
End plate, right	Die-cast aluminium
Pneumatic interface for CPX	Die-cast aluminium
Throttle plate	Die-cast aluminium
Pressure regulator plate	Die-cast aluminium, PA
Multi-pin manifold block	Die-cast aluminium
IO-Link [®] interface	Die-cast aluminium, PA
Cover for the pneumatic interface and multi-pin	PA
plug connection	
Note on materials	RoHS-compliant
LABS (PWIS) conformity (exclusively for IO-Link®)	VDMA24364-B2-L

Product weight							
	Width						
Approx. weight [g] 18 mm	26 mm	42 mm	52 mm			
Multi-pin node with Sub-D or terminal strip for VTSA/VTSA-F 1)	550						
Multi-pin node with M12 individual connection for VTSA/VTSA-F	760						
Pneumatic interface CPX for VTSA/VTSA-F							
 With diagnostics for undervoltage of valves (VABA-S6-1-X1/X2/X2-D) 	590						
Pneumatic interface CPX for VTSA-F-CB							
• With 3x load supplies (VABA-S6-1-X1/X2-3V-CB)	580						
 For PROFIsafe, with diagnostics for undervoltage, short circuit of valves, wire break per solenoid coil (VABA-S6-1-X2-F1/F2-CB) 	734						
 With diagnostics for undervoltage, short circuit of valves, wire break per solenoid coil (VABA-S6-1-X1/X2-CB) 	560						
IO-Link [®] interface	690						
Electrical interface for AS-Interface for VTSA/VTSA-F	300						
AS-Interface module for VTSA/VTSA-F	850						
Supply plate for valve terminal VTSA/VTSA-F 2)							
Exhaust plate with 3 and 5 common	617						
Exhaust air cover with 3 and 5 separate	597						
Supply plate/extension module for VTSA-F-CB 2)							
• Exhaust plate with 3 and 5 common	611						
• Exhaust air cover with 3 and 5 separate	600						
Right end plate 3)							
With threaded connections	339			336			
Selector switch	281			-			
Manifold sub-base for VTSA/VTSA-F 4)	447	634	340, 330 ⁵⁾	610			
Manifold sub-base for VTSA-F-CB 4)	434	579	330	610			
Hybrid manifold sub-base for VTSA/VTSA-F 4)	512	512	_	_			
Angled connection plate ³⁾	170	230	176	359			
Pressure regulator plate							
• For port 1 (P)	350	402	640	1190			
• For port 4 or 2 (A or B)	367	448	640	1230			
• For ports 4 and 2 (A/B)	611	692	920	1990			
Throttle plate	228	320	220	565			
Vertical supply plate 3)	140	191	340	605			
Vertical pressure shut-off plate	209	273	600	1030			
Vertical pressure shut-off plate (lockable with key)	231 290 – –						
Valves	→ Solenoid valves, widths						
Cover plate	34	73	68	146			

¹⁾ With sheet metal seal, printed circuit board

²⁾ With sheet metal seal and electrical link

With screws
 With sheet metal seal, electrical links, inscription label holder, 4 screws
 Manifold sub-base optimised for flow rate, HS

Download CAD data → www.festo.com Valve terminal with individual electrical connection The state of the s

- [1] Solenoid valve width 18 mm
- [2] Solenoid valve width 26 mm
- [3] Solenoid valve width 42 mm
- [4] Cover cap/manual override
- [5] Threaded connection G1/2
- [6] Threaded connection G3/8

- [7] Threaded connection G1/4
- [8] Threaded connection G1/8
- [9] DIN rail
- [10] DIN rail mounting
- [11] Mounting hole
- [12] Additional mounting bracket
- [13] Inscription label holder
- [14] Individual connection
- [15] End plate

- [16] Angled connection plate 43 mm, G3/8
- [17] Angled connection plate 54 mm, G1/4
- [18] M12 plug 5-pin (6-way or 10-way)
- [19] Solenoid valve width 52 mm
- [20] Supply plate

- n02 Number of manifold subbases 38 mm
- n01 Number of manifold subbases 54 mm
- n1 Number of manifold subbases 43 mm
- n2 Number of manifold subbases 59 mm
- n Number of supply plates (only with end plate with pilot air selector)
- nh Number of hybrid manifold sub-bases 46 mm

Dim.	B1	B2	В	3 E	34 B	5 B	6 B7	' В8	В9	B1	10 B1	11 B	12 B	13	314	B15	B16	B17	B18	B19	B20
[mm]	150.5	5 14:	2 12	1 !	57 4	6 3	3 18	48	26	2	4 21	.3 1	2 2	9.6	23	19.6	19.5	19	10.5	6.6	4.5
Dim.	L2	L3	L	4	L5	L6	L7	L8	L9		L10	L11	L12	L13	L1	4 L	15	L16	L17	L18	L19
[mm]	92.4	71.3	n2x	(59	n01x54	54	n1x43	43	43.	5 nC)2x38	nx38	38	37.3	24	4 2	0.5	20	14.1	9.8	6.3
Dim.	L20	L21	L22	D1ø	D2ø	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H1	1 H1	2 H1	3 H14	H15	H16
[mm]	5.5	3	2	18.5	4.5	125	121.3	118.2	118	103	107.8	90.3	87	65	44	25.	7 24.	.5 1:	2 6	3.5	0.5

Width	L1
18 mm	71.3 + n02 x 38 + n x 38 + 37.3
26 mm	71.3 + n01 x 54 + n x 38 + 37.3
42 mm	71.3 + n1 x 43 + n x 38 + 37.3
52 mm	71.3 + n2 x 59 + n x 38 + 37.3
Mix 18 mm, 26 mm, 42 mm, hybrid manifold sub-base 46 mm and 52 mm	71.3 + n02 x 38 + n01 x 54 + n1 x 43 + nh x 46 + n2x59 + n x 38 + 37.3


Note: This product conforms to ISO 1179-1 and ISO 228-1.


Dimensions Download CAD data → www.festo.com Valve terminal with multi-pin plug connection: **⊕**6⊕ 17 7 14 5 8 15 H12 5 10 [9] DIN rail [1] Solenoid valve [17] Angled connection plate Number of manifold subn02 [10] DIN rail mounting Width 18 mm 54 mm, G1/4 bases 38 mm Number of manifold sub-[2] Solenoid valve [11] Mounting hole [18] Proximity switch M12x1 n01 Width 26 mm [12] Additional mounting bracket [19] Plug socket M12x1 bases 54 mm [3] Solenoid valve [13] Inscription label holder [20] Electrical connection to n1 Number of manifold sub-Width 42 mm [14] Multi-pin plug connection EN 175301-803, type C bases 43 mm Number of manifold sub-[4] Cover cap/manual override [15] End plate [21] Solenoid valve n2 [5] Threaded connection G1/2 width 52 mm bases 59 mm Threaded connection G3/8 [16] Angled connection plate [22] Supply plate Number of supply plates Threaded connection G1/4 43 mm, G3/8 [23] Soft-start valve (only with end plate with [8] Threaded connection G1/8 pilot air selector) Number of hybrid manifold nh sub-bases 46 mm

Dim.	B1	B2	В3	B4	B5	В6	B7	B8	В9	B10	B1	1 E	312	B13	B14	B16	B17	' B1	18	B19	B20
[mm]	150.5	142	121	57	46	33	18	48	26	27	2		12	29.6	23	19.5	19	10	.5	6.6	4.5
					_				1	-							1				
Dim.	L2	L3	L4	L5	L6	L7	L8	L9	L10	L	l 1	L12	L13	L14	L15	L16	L18	L1	9 I	_20	L21
[mm]	92.4	71.3	n2x59	n01x54	54	n1x4	3 43	43.5	n02x3	38 nx	38	38	37.3	36	20.5	20	9.8	6.3	3	5.5	3
Dim.	L22	D1ø	D2Ø	H1	H2	Н3	H4	H5	Н6	H7	Н8	H9	H10	H11	H12	H13	H14	H15	H16	H17	H18
[mm]	2	18.5	4.5	143.9	133.3	125	121.3	118.2	106.3	107.8	103	90.3	90.	3 87	65	44	25.7	24.5	12	6	3.5

Width	L1
18 mm	71.3 + n02 x 38 + n x 38 + 37.3
26 mm	71.3 + n01 x 54 + n x 38 + 37.3
42 mm	71.3 + n1 x 43 + n x 38 + 37.3
52 mm	71.3 + n2 x 59 + n x 38 + 37.3
Mix 18 mm, 26 mm, 42 mm, hybrid manifold sub-base 46 mm and 52 mm	71.3 + n02 x 38 + n01 x 54 + n1 x 43 + nh x 46 + n2 x 59 + n x 38 + 37.3

Note: This product conforms to ISO 1179-1 and ISO 228-1.

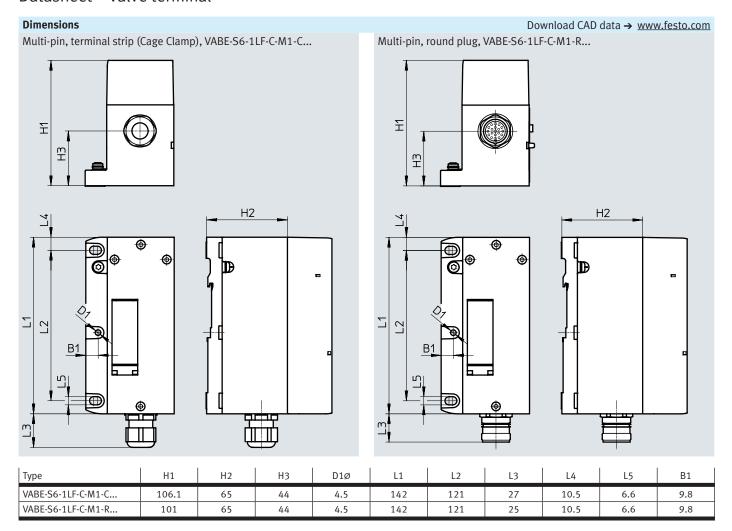

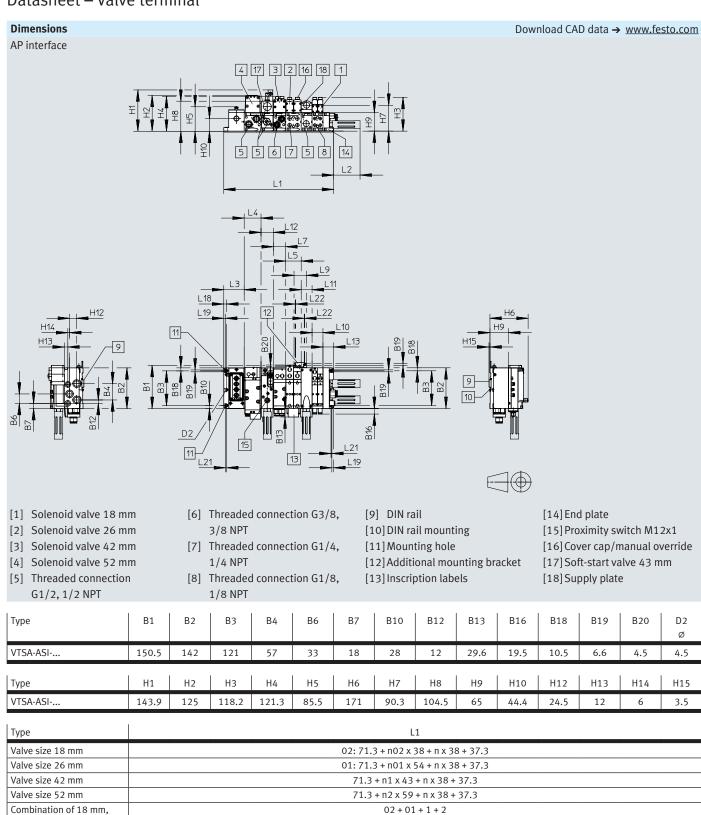

1) Number of manifold sub-bases 59 mm

12

92.4

L3

71.3

L4

L5

n2¹⁾ x 59 | n01²⁾ x 54 | n1³⁾ x 43

L7

19

43.5

26 mm, 42 mm and 52 mm

Туре

VTSA-ASI-...

- Number of manifold sub-bases 54 mm
- 3) Number of manifold sub-bases 43 mm
- 4) Number of manifold sub-bases 38 mm
- 5) Number of manifold sub-bases

71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 + n x 38 + 37.3

n02⁴⁾ x 38 n⁵⁾ x 38

L11

L12

L13

37.3

L18

9.8

L19

6.3


L21


L22

L10

Dimensions

Valve terminal with AS-Interface connection

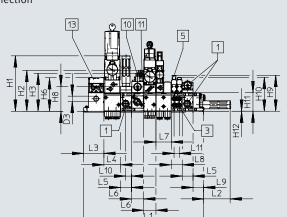

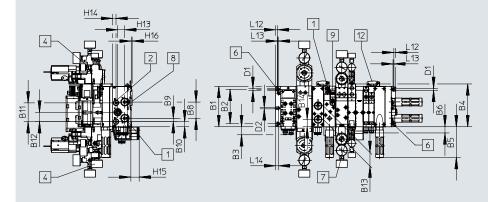



- [1] Threaded connection 1/2
- [2] Threaded connection 1/4
- [3] Threaded connection 1/8
- [4] Pressure gauge, freely positionable
- [5] Manual override
- [6] Mounting holes

- [7] Inscription label
- [8] DIN rail mounting
- [9] Electrical connection to DIN EN 175301-803, type C
- [10] Proximity switch M12x1
- [11] Plug socket M12x1
- [12] Additional mounting bracket
- [13] Electronic connection for AS-Interface

n02 Number of manifold subbases ISO 02

Download CAD data → www.festo.com

- n01 Number of manifold subbases ISO 01
- n1 Number of manifold subbases ISO 1
- n2 Number of manifold subbases ISO 2
- nzwp Number of supply plates
- nDA Number of soft-start valve

S


Dim.	B1	B2	В3	B4 I	35	В6	В8	В9	B10	B11	B12	B13	B14	D1	D2	D3
[mm]	142	121	28 1	.50.5 10	8.1 2	21.6	57	12	18	66	33	48	26	6.6	4.5	18.5
Dim.	H1	H2	Н3	Не		Н8	H9	H	10	H11	H12	H13		114	H15	H16
[mm]	195.2	144	133.	4 11	3	87	126	5 13	8.8	65	0.4	24.4		12	29.3	3.5
Dim.	L1	L2	L3	L4	L5		L6	L7	L8	L9	L10) L	11	L12	L13	L14
[mm]	578.3	93.2	71.3	59	38		43	54	38.6	37.3	20.	5 1	.9	6.3	3	9.8

ISO size	Sub-base width	Overall length
02 + ZWP	38	108.6 + n02 * 38 + nZWP * 38 + nDA * 43
01	54	108.6 + n01 * 54 + nZWP * 38 + nDA * 43
1 + DA	43	108.6 + n1 * 43 + nZWP * 38 + nDA * 43
2	59	108.6 + n2 * 59 + nZWP * 38 + nDA * 43
mix 02 + 01 + 1 + 2	38 + 54 + 43 + 59	108.6 + n02 * 38 + n01 * 54 + n1 * 43 + nZWP * 38 + n2 * 59 + nDA * 43

Dimensions

Valve terminal with fieldbus interface

Download CAD data → www.festo.com

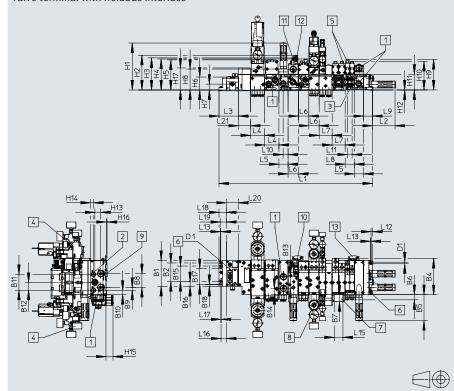

- [1] Threaded connection 1/2
- [2] Threaded connection 1/4
- [3] Threaded connection 1/8
- [4] Pressure gauge, freely positionable
- [5] Manual override
- [6] Mounting holes
- [7] Inscription label
- [8] Inscription label
- [9] DIN rail mounting
- [10] Electrical connection to EN 175301-803, type C
- $[11] \, Proximity \, switch \, M12x1$
- [12] Plug socket M12x1
- [13] Additional mounting
- n02 Number of manifold subbases ISO 02
- n01 Number of manifold subbases ISO 01
- n1 Number of manifold subbases ISO 1
- n2 Number of manifold subbases ISO 2
- n Number of supply plates (only with end plate with pilot air selector)
- nDA Number of soft-start valve
- m Number of CPX modules

Dim.	B1	B2	В4	B5	В6	В7	В8	В9	B10	о в	11	B12	B13	B14	B1	5 B1	6 B1	7 B18	D1	D3
[mm]	107.3	78	150.5	108.1	21.6	29.4	57	12	18	6	66	33	48	26	65	18.	9 66.	3 7.5	6.6	4.5
Dim.	L1	L2	L3	L4	L5	L6	L	7	L8	L9	L1	10 L	11	L13	L15	L17	L18	L19	L20	L21
[mm]	587.5	93.2	80.5	59	38	43	5	4 3	8.6	37.3	20).5 1	.9	3	36	1	30.4	23.7	mx50	50
Dim.	H1	H2	H3	H4	. н	5 I	H6	H <i>7</i>	H8	Н	19	H10	H11	. н	12	H13	H14	H15	H16	H17
[mm]	195.2	144	133.4	4 128	.7 1	25 5	5.1	25.8	87	1	26	118.8	65	C	.4	24.4	12	29.3	3.5	91.6


ISO size	Sub-base width	L1
02 + ZWP	38	117.7 + n02 * 38 + nZWP * 38 + nDA * 43
01	54	117.7 + n01 * 54 + nZWP * 38 + nDA * 43
1 + DA	43	117.7 + n1 * 43 + nZWP * 38 + nDA * 43
2	59	117.7 + n2 * 59 + nZWP * 38 + nDA * 43
mix 02 + 01 + 1 + 2	38 + 54 + 43 + 59	117.7 + n02 * 38 + n01 * 54 + n1 * 43 + nZWP * 38 + n2 * 59 + nDA * 43

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions

Download CAD data → www.festo.com

Valve terminal VTSA-F-CB with fieldbus interface

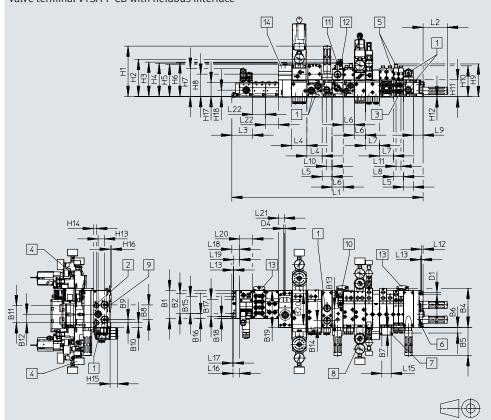

- [1] Threaded connection 1/2
- [2] Threaded connection 1/4
- [3] Threaded connection 1/8
- [4] Pressure gauge, freely positionable
- [5] Manual override
- [6] Mounting holes
- [7] Inscription label
- [8] Inscription label
- [9] DIN rail mounting
- [10] Electrical connection to DIN EN 175301-803, type C
- [11] Proximity switch M12x1

- [12] Plug socket M12x1
- [13] Additional mounting
- [14] Pneumatic interface CPX
- n02 Number of manifold subbases ISO 02
- n01 Number of manifold subbases ISO 01
- n1 Number of manifold subbases ISO 1
- n2 Number of manifold subbases ISO 2
- nZWP Number of intermediate feed plates
- nDA Number of soft-start valve
- m Number of CPX modules


Dim.	В1	B2	B4	B5	В6	В7	В8	В9	B10	B11	B12	B13	B14	B15	B16	B17	B 1 8	B19	B20
[mm]	108.1	78	150.5	108.1	21.6	29.4	57	12	18	66	33	48	26	65	19.3	66.3	7.9	142.6	121
Dim.	D4	H1	H2	Н3	H4	H5	Н6	H7	H8	Н9	H10	H11	H12	H13	H14	H15	H16	H17	H18
											118.8								

Dim.	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L13	L15	L16	L17	L18	L19	L20	L21	L22
[mm]	557	93.2	80.3	59	38	43	54	38.6	37.3	20.5	19	1.5	36	25.9	1	30.4	23.7	mx50.1	22.3	50.1

ISO size	Sub-base width	Overall length
02 + ZWP	38	117.7 + n02 * 38 + nZWP * 38 + nDA * 43
01	54	117.7 + n01 * 54 + nZWP * 38 + nDA * 43
1 + DA	43	117.7 + n1 * 43 + nZWP * 38 + nDA * 43
2	59	117.7 + n2 * 59 + nZWP * 38 + nDA * 43
mix 02 + 01 + 1 + 2	38 + 54 + 43 + 59	117.7 + n02 * 38 + n01 * 54 + n1 * 43 + nZWP * 38 + n2 * 59 + nDA * 43


Dimensions


Vertical stacking components, width 18 mm

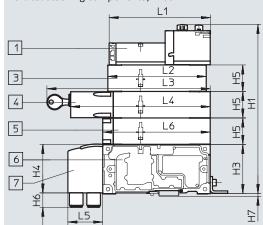

- Download CAD data → www.festo.com
 - [1] Solenoid valve with two solenoid coils, width 18 mm
 - [3] Throttle plate
 - [4] Vertical pressure shut-off plate lockable (code ZT), optionally lockable with key (code ZS)
 - [5] Vertical supply plate
 - [6] Manifold sub-base
 - [7] Angled connection plate

Dim.	L1	L2	L3 (Code ZT)	L4 (Code ZT)	L3 (Code ZS)	L4 (Code ZS)	L5	L6	H1	Н3	H4	H5	Н6	H7
[mm]	133.8	130	-	184.1	222.3	198.3	46	142	224	65	64	35	19	3.5

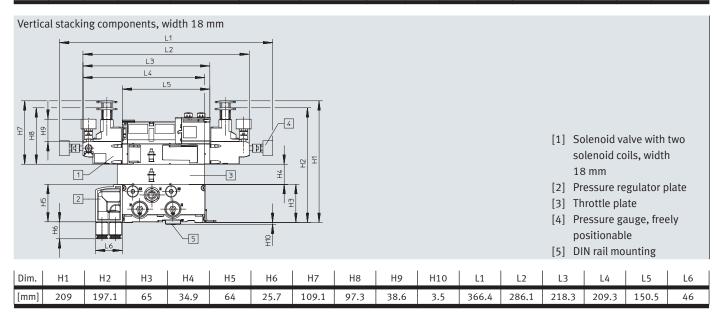

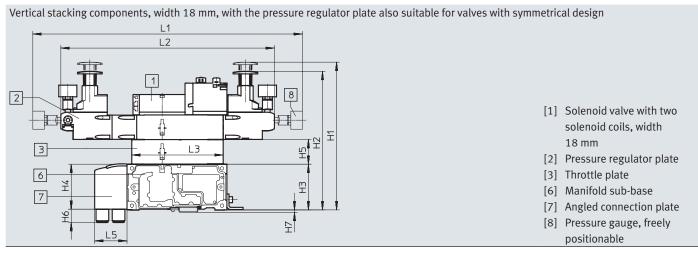


Dimensions

Datasheet - Valve terminal


batasiicet vatve terri


Vertical stacking components, width 26 mm

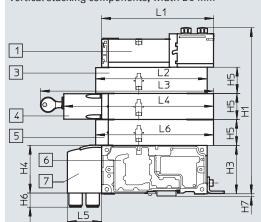

- Download CAD data → www.festo.com
 - [1] Solenoid valve with two solenoid coils, width 26 mm
 - [3] Throttle plate
 - [4] Vertical pressure shut-off plate, lockable (code ZT), optionally lockable with key (code ZS)
 - [5] Vertical supply plate
 - [6] Manifold sub-base
 - [7] Angled connection plate


D	im.	L1	L2	L3	L4	L3	L4	L5	L6	H1	Н3	H4	H5	Н6	H7
				(Code ZT)	(Code ZT)	(Code ZS)	(Code ZS)								
[r	nm]	150.8	150	-	201.4	239.5	215.5	46	158.5	224	65	64	35	19	3.5

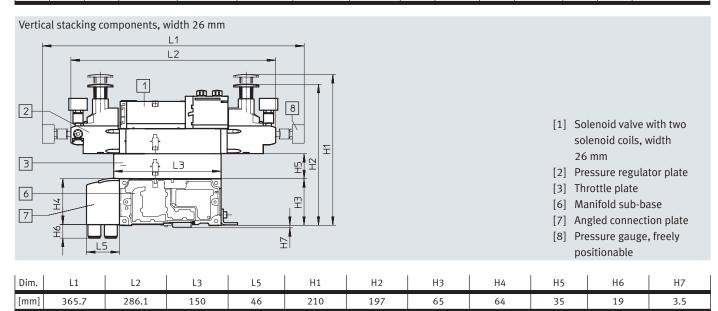

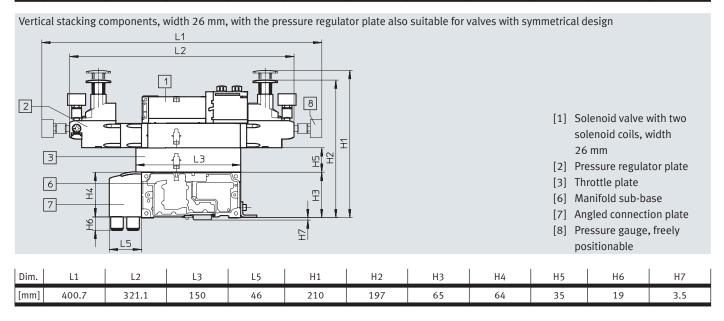

Dimensions


Vertical stacking components, width 42 mm

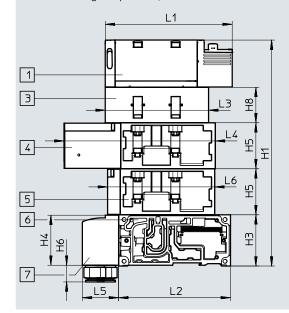

Download CAD data → www.festo.com

- [1] Solenoid valve
- [3] Throttle plate
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base
- [7] Angled connection plate

Dim.	L1	L2	L3	L4	L5	L6	H1	Н3	H4	H5	Н6	H7	Н8
[mm]	137.8	142	105.3	173.8	46	117.6	236	65	64	45.3	25.7	3.5	28

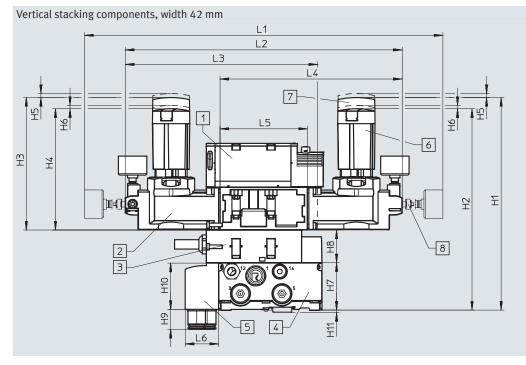

- [1] Solenoid valve
- [2] Pressure regulator plate
- [3] Throttle plate
- [4] Manifold sub-base
- [5] Angled connection plate
- [6] Short rotary knob, lockable (standard)
- [7] Long rotary knob, lockable
- [8] Pressure gauge, freely positionable

Dim.	L1	L2	L3	L4	L5	L6	H1	H2	Н3	H4	H5	Н6	H7	Н8	H9	H10	H11
[mm]	410.3	311.6	216.1	207.1	102.6	46	220	205	127	112	3	4.2	65	28	25.7	64	3.5



- Pressure regulator plates for symmetrical valves with widths of 42 mm and 52 mm can only be ordered via the pressure regulator configurator VABF-S2.
- → Internet: vabf-s2


The following can be selected using the pressure regulator configurator VABF-S2:

- Rotary knob, short version with locking element (standard)
- Rotary knob, long version with locking element
- Rotary knob with integrated lock

Dimensions

Datasheet - Valve terminal


Vertical stacking components, width 52 mm

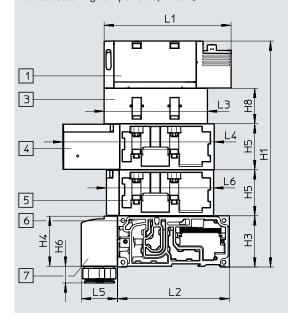

Download CAD data → www.festo.com

- [1] Solenoid valve
- Throttle plate [3]
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base
- [7] Angled connection plate

Dim.	L1	L2	L3	L4	L5	L6	H1	Н3	H4	H5	H6	Н8
[mm]	160.7	142	131	191.2	46	136	287.4	65	63.5	58.7	21.2	45

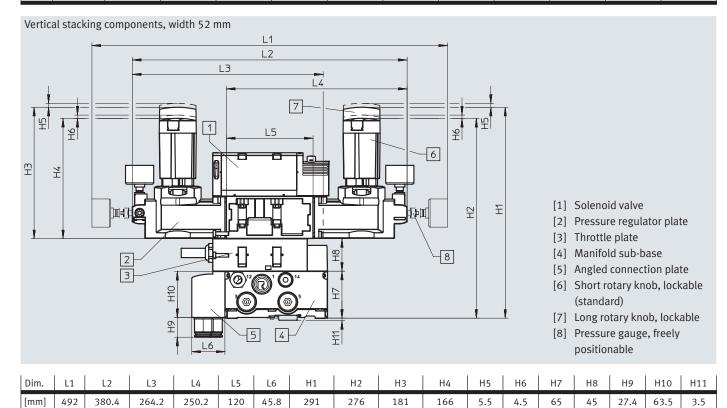





- Pressure regulator plates for symmetrical valves with widths of 42 mm and 52 mm can only be ordered via the pressure regulator configurator VABF-S2.
- → Internet: vabf-s2

- The following can be selected using the pressure regulator configurator VABF-S2:
- Rotary knob, short version with locking element (standard)
- Rotary knob, long version with locking element
- Rotary knob with integrated lock

Dimensions Download CAD data → www.festo.com Supply plate with silencer 2 1 [1] Supply plate [2] Exhaust port cover [3] Silencer U-1/2-B L2 [4] Threaded connection G1/2 Dim. Н1 H2 В1 142 107.5 75 38 [mm] 31.5

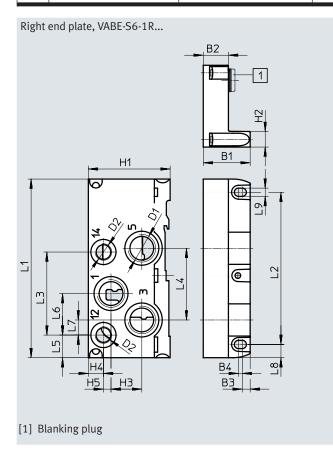

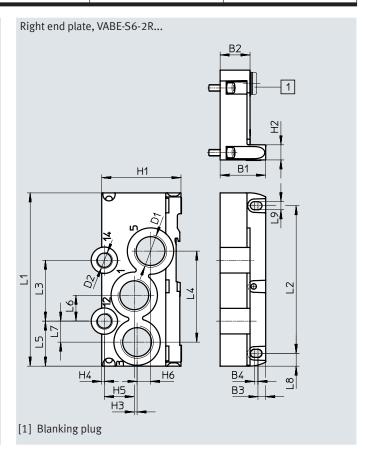

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	D1	D2	Н1	H2	Н3	H4	H5	Н6	B1	В2	В3	В4	With1)
VABE-S6-1R-G12	142	121	66	5.7	18	33	12	10.5	6.6	G1/2	G1 / /	65	12.5	24.5	12	6		37.3	22	6.3	2	[1]
VABE-S6-1RZ-G12	142	121	00	57	10	22	12	12 10.5	0.0	01/2	01/4	0	12.5	24.5	12	0		37.3	22	0.3	3	-
VABE-S6-2R-G34	142	121	40.0	74.6	36.9	21.2	17.2	10.5	6.6	C2/4	G1/4	65	12.5	.5 2.3	3 2.2	24.5	11	37.3	24.5	6.3	3	[1]
VABE-S6-2RZ-G34		2 121	49.9	74.6	30.9	21.2		10.5	0.0	03/4		05				24.5	11	57.5	24.5	0.5		_

With blanking plug = internal pilot air supply, – without blanking plug = external pilot air supply Special feature: There is no port 14 for VABE-S6-1R-G12 (code V).

 $[\]slash\hspace{-0.6em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}{0.8em}\hspace{0.8em}{0.8em}\hspace{0.8em}\hspace{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\rule{0.8em}{0.8em}{0.8em}\hspace{0.8em}{0.8em}\hspace{0.8em}\hspace{0.8em}{0.8em}\hspace{0$

L1

142

L2

121

L5

41.3

L8

10.5

L9

6.6

D1

G1/4

D2

37

Н1

65.4

H2

12.5

Н3

23

Н4

33

Н5

21

В1

37.3

В2

20

В3

6.3

В4

3

B5

12

В6

10.5

Туре

VABE-S6-1RZ-G-B1

 $[\]mid$ Note: This product conforms to ISO 1179-1 and ISO 228-1.

Datasheet - Solenoid valves VSVA


- **[]** - Valve width to ISO 15407-2

- 18 mm
- 26 mm to ISO 5599-2
- 42 mm
- 52 mm

Voltage 24 V DC



Width 18 mm: up to 550 (700) l/min
Width 26 mm: up to 1100 (1350) l/min
Width 42 mm: up to 1300 (1860) l/min
Width 52 mm
up to 2900 l/min

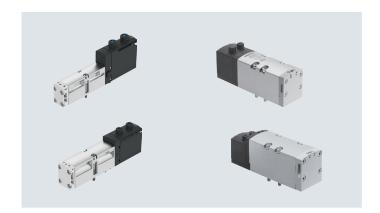

1) Flow rates in brackets apply to VTSA-F and VTSA-F-CB

General technical data for s	olenoid val	ves					
Design		Piston spool valve					
Sealing principle		Soft					
Overlap		Positive overlap (excluding types P53AD, P53BD)					
		Negative overlap (types P53AD, P53BD)					
Reset method		Mechanical or pneumatic, depending on the type used					
Actuation type		Electrical					
Electrical connection		Plug to ISO 15407-2, 2-pin (single solenoid types) or 4-pin (double solenoid and 5/3-way types)					
Type of control		Piloted					
Degree of protection to EN 6	50529	IP65, NEMA 4 (for all types of signal transmission when mounted)					
Exhaust function, can be thr	ottled	Via individual sub-base, via throttle plate (not with valve type T22)					
Type of mounting		On manifold sub-base, on individual sub-base					
Mounting position		Any					
Manual override		Detenting, non-detenting, concealed					
Signal status indication		LED (except types with signal status display sensor, and part nos.: 560727 and 560728)					
Sensor signal status		Yellow LED					
indication							
Duty cycle	[%]	100					
Pollution degree		3					
Surge resistance	[kV]	2.5					
Nominal operating voltage	[V DC]	24 (dependent on valve type)					
Permissible voltage	[%]	±10					
fluctuations							
Pneumatic connections							
Supply	1	Via the manifold sub-base of the valve terminal or via individual sub-base					
Exhausting	3/5						
Working ports	2/4						
Pilot air supply	12/14						
Pilot exhaust air	8 2/84	Either ducted or unducted					

Datasheet - Solenoid valves

Terminal code	VC	VV	N	K	Н	P	Q	R	M	0
Valve code	T22C	T22CV	T32U	T32C	T32H	T32F	T32N	T32W	M52-A	M52-M
Flow direction										
Any	_	•	_	_	_	_	_	_	•	-
Reversible only	_	-	_	_	_	•	•	•	_	_
Not reversible	•	_	•	•	•	_	_	_	-	_
Reset method										
Pneumatic spring	•		-	•		•	•	•	-	_
Mechanical	_	_	_	_	_	_	_	_	_	
spring										
Pneumatic characte	eristic data									
Pneumatic characte	J	D	В	G	E	SA	SB	SD	SE	VG
Pneumatic characte	eristic data J B52	D D52	B P53U	G P53C	E P53E	SA P53ED	SB P53AD	SD P53BD	SE P53EP	
Pneumatic characte Terminal code Valve code	J									VG
Pneumatic characte Terminal code Valve code Flow direction	J									VG
Pneumatic characte Terminal code Valve code Flow direction Any	J B52	D52	P53U	P53C	P53E	P53ED	P53AD	P53BD	P53EP	VG P53F
Pneumatic characte Terminal code Valve code Flow direction Any Reversible only	J B52	D52	P53U	P53C	P53E	P53ED –	P53AD	P53BD	P53EP	VG P53F
Pneumatic characte Terminal code Valve code Flow direction Any Reversible only Not reversible	B52	D52	P53U	P53C	P53E	P53ED -	P53AD	P53BD	P53EP	VG P53F
Pneumatic characte Terminal code Valve code Flow direction Any Reversible only Not reversible Reset method Pneumatic spring	B52	D52	P53U	P53C	P53E	P53ED -	P53AD	P53BD	P53EP	VG P53F

Flow direction of solenoid valves

Solenoid valves only with reversible flow direction

- These valves must only be operated on pressure zones with reversible supply (3 and 5 with supply pressure 1 as exhaust air) or on a reversible pressure regulator. If necessary, create separate pressure zones with duct separation.
- Reversible 3/2-way solenoid valves do not permit the special function "ducted pilot exhaust air"
- Ports 12 and 14 on the end plate variants must be supplied with the same pressure.
- Right end plate with pilot air selector: can be realised via position 1 or 2
- Right end plate with threaded connections: 12 and 14 must be supplied with the same pressure level

Solenoid valves with any flow direction

- Valves with any flow direction such as the 5/2-way solenoid valve, code M, are suitable for vacuum operation (standard valves such as the 2x 2/2-way solenoid valve with code VC must not be used for vacuum operation).
- An exception is the 2x 2/2-way solenoid valve with code VV (T22CV), which only allows vacuum operation at ports 3 and 5. The solenoid valve with code VV (T22CV) cannot be combined with other valve functions; a separate pressure zone is required.

Datasheet – Solenoid valves

Operating and environmental of	onditions		
Operating medium			Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium			Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/ Pilot medium			Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure, pilot air		[bar]	-0.9 +10 (valves with any flow direction and reversible valves)
supply1)			3 10 (non-reversible valves)
		[MPa]	-0.09 +1 (valves with any flow direction and reversible valves)
			0.3 1 (non-reversible valves)
Pilot pressure		[bar]	310
		[MPa]	0.3 1
Pilot air supply			External
			Internal via valve terminal
Ambient temperature		[°C]	-5 +50
Relative humidity		[%]	090
Certification			BIA (for characteristic SP and/or SN only)
	Direct voltage 24 V		C-Tick (only size 52 mm and solenoid valves with sensor (position sensing))
			c UL us – Recognized (OL)

¹⁾ Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; the operating pressure here is 3 ... 10 bar

Datasheet - Solenoid valve width 18 mm

- **[]** - Valve width to ISO 15407-2 18 mm

- **** - Voltage 24 V DC

Flow rate
Valve width 18 mm:
VTSA up to 550 l/min
VTSA-F up to 700 l/min
VTSA-F-CB up to 700 l/min



Safety characteristics for valve						
Conforms to standard	EN 13849-1/2					
Shock resistance	Shock test with severity level 2, to EN 60068-2-27					
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6					

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Valve function (with valve code)	Terminal	al Test pulses					
	code	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]				
5/2-way double solenoid (B52)	J	1500	800				
5/2-way double solenoid with dominant signal (D52)	D	1700	1200				
5/2-way single solenoid (M52A)	М	1500	800				
5/2-way single solenoid (M52M)	0	1500	800				
5/3-way closed (P53C)	G	1500	800				
5/3-way exhausted (P53E)	Е	1500	800				
5/3-way pressurised (P53U)	В	1500	800				
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1500	800				
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1500	800				
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1500	800				
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1500	800				
2x3/2-way single solenoid, closed (T32C)	К	1700	1200				
2x3/2-way single solenoid, open (T32U)	N	1700	1200				
2x3/2-way single solenoid, open/closed (T32H)	Н	1700	1200				
2x3/2-way single solenoid, closed (T32N)	Q	1700	1200				
2x3/2-way single solenoid, open (T32F)	Р	1700	1200				
2x3/2-way single solenoid, open/closed (T32W)	R	1700	1200				
2x2/2-way single solenoid, closed (T22C)	VC	1700	1200				
2x2/2-way single solenoid, closed (T22CV)	VV	1700	1200				

Datasheet - Solenoid valve width 18 mm

Datasheet for valve	l- · ·	le			la		l
Valve function (with valve code)	Terminal code	Flow direction	Only reversible	Not reversible	Reset method Pneumatic spring	Mechanical spring	Weight [g]
5/2-way double solenoid (B52)	J		_	_	_	_	172
5/2-way double solenoid with dominant signal (D52)	D	•	-	-	-	-	172
5/2-way single solenoid (M52A)	М	•	_	_	-	_	163
5/2-way single solenoid (M52M)	0	•	_	_	-	•	163
5/3-way closed1) (P53C)	G	•	_	_	_	•	191
5/3-way exhausted1) (P53E)	E	•	_	_	_	•	191
5/3-way pressurised1) (P53U)	В	•	_	_	_	•	191
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	-	-	•	_	-	170
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	-	-	-	_	•	170
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	•	-	-	-	•	172
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	-	-	-	-	•	172
2x3/2-way single solenoid, closed (T32C)	К	-	_	•	-	_	190
2x3/2-way single solenoid, open (T32U)	N	-	_	•	-	_	190
2x3/2-way single solenoid, open/closed (T32H)	Н	-	_	•	-	_	190
2x3/2-way single solenoid, closed (T32N)	Q	_	•	_	-	_	190
2x3/2-way single solenoid, open (T32F)	Р	_	•	_	-	_	190
2x3/2-way single solenoid, open/closed (T32W)	R	-	•	_	-	_	190
2x2/2-way single solenoid, closed (T22C)	VC	-	_	•	-	_	190
2x2/2-way single solenoid, closed (T22CV)	VV	•	_	_	•	_	190

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Datasheet - Solenoid valve width 18 mm

Valve function (with valve code)	Terminal	al Flow rate							
	code	Valve	Valve on valv	Valve on valve terminal					
			VTSA	VTSA-F	VTSA-F-CB	sub-base			
5/2-way double solenoid (B52)	J	750	550	700	700	600			
5/2-way double solenoid with dominant signal (D52)	D	750	550	700	700	600			
5/2-way single solenoid (M52A)	M	750	550	700	700	600			
5/2-way single solenoid (M52M)	0	750	550	700	700	600			
5/3-way closed (P53C)	G	700	450	650	650	550			
5/3-way exhausted (P53E)	E	700 ¹⁾	450 ¹⁾	480 ¹⁾	4801)	500 ¹⁾			
		330 ²⁾	330 ²⁾	330 ²⁾	330 ²⁾	330 ²⁾			
5/3-way pressurised (P53U)	В	700 ¹⁾	450 ¹⁾	4801)	4801)	500 ¹⁾			
		330 ²⁾	330 ²⁾	330 ²⁾	330 ²⁾	330 ²⁾			
5/3-way exhausted, switching position 14 detenting	SA	_	380 ¹⁾	430 ¹⁾	430 ¹⁾	390 ¹⁾			
(P53ED)			310 ²⁾	360 ²⁾	360 ²⁾	310 ²⁾			
5/3-way exhausted, switching position 12 detenting	SE	_	380 ¹⁾	460 ¹⁾	460 ¹⁾	390 ¹⁾			
(P53EP)			300 ²⁾	350 ²⁾	350 ²⁾	320 ²⁾			
5/3-way, port 2 pressurised, 4 exhausted, switching	SB	_	380 ¹⁾	4401)	4401)	380 ¹⁾			
position 14 detenting (P53AD)			350 ²⁾	400 ²⁾	400 ²⁾	360 ²⁾			
5/3-way, port 4 pressurised, 2 exhausted, switching	SD	_	370 ¹⁾	4301)	4301)	4001)			
position 14 detenting (P53BD)			340 ²⁾	360 ²⁾	360 ²⁾	350 ²⁾			
			360 ³⁾	450 ³⁾	450 ³⁾	390 ³⁾			
			360 ⁴⁾	450 ⁴⁾	450 ⁴⁾	380 ⁴⁾			
2x3/2-way single solenoid, closed (T32C)	K	600	400	550	550	500			
2x3/2-way single solenoid, open (T32U)	N	600	400	550	550	500			
2x3/2-way single solenoid, open/closed (T32H)	Н	600	400	550	550	500			
2x3/2-way single solenoid, closed (T32N)	Q	600	400	550	550	500			
2x3/2-way single solenoid, open (T32F)	Р	600	400	550	550	500			
2x3/2-way single solenoid, open/closed (T32W)	R	600	400	550	550	500			
2x2/2-way single solenoid, closed (T22C)	VC	700	500	650	650	500			
2x2/2-way single solenoid, closed (T22CV)	VV	700	500	650	650	500			

- 1) Switching position
- 2) Mid-position
- Switching position 4 → 5
- 4) Mid position 2 → 3

- 🖣 - Note

When using the solenoid valves VSVA-B-P53AD-...- or VSVA-B-P53BD-...- (terminal code SB or SD) for unobstructed exhausting (1a2 or 1a4) in the detenting or mid-position, the flow rate can reduce or drop to 0 l/min if the operating pressure is greater than 6 bar. This does not happen if a tube measuring at least 15 cm in length is used at port 2/4.

Datasheet – Solenoid valve width 18 mm

Valve switching times in [ms]				
Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	_	11
5/2-way double solenoid with dominant signal (D52)	D	_	_	13
5/2-way single solenoid (M52A)	M	22	28	_
5/2-way single solenoid (M52M)	0	12	38	-
5/3-way closed (P53C)	G	15	44	_
5/3-way exhausted (P53E)	E	15	44	_
5/3-way pressurised (P53U)	В	15	44	_
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	13 for control side 12 10 for control side 14	37 for control side 12	(24)
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	10 for control side 12 13 for control side 14	30 for control side 12	(23)
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	12 for control side 12 9 for control side 14	28 for control side 12	-
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	12 for control side 12 9 for control side 14	28 for control side 12	-
2x3/2-way single solenoid, closed (T32C)	K	12	30	-
2x3/2-way single solenoid, open (T32U)	N	12	30	-
2x3/2-way single solenoid, open/closed (T32H)	Н	12	30	-
2x3/2-way single solenoid, closed (T32N)	Q	25	12	_
2x3/2-way single solenoid, open (T32F)	Р	25	12	-
2x3/2-way single solenoid, open/closed (T32W)	R	25	12	-
2x2/2-way single solenoid, closed (T22C)	VC	12	30	-
2x2/2-way single solenoid, closed (T22CV)	VV	12	30	-

Characteristic coil data									
Valve function (with valve code)	Terminal code	Characteristic coil data at 24 V DC in [W]							
5/2-way double solenoid (B52)	J	1.6							
5/2-way double solenoid with dominant signal (D52)	D	1.3							
5/2-way single solenoid (M52A)	M	1.6							
5/2-way single solenoid (M52M)	0	1.6							
5/3-way closed (P53C)	G	1.6							
5/3-way exhausted (P53E)	E	1.6							
5/3-way pressurised (P53U)	В	1.6							
5/3-way, exhausted, switching position 14 detenting (P53ED)	SA	1.6							
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1.6							
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1.6							
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1.6							
2x3/2-way single solenoid, closed (T32C)	K	1.3							
2x3/2-way single solenoid, open (T32U)	N	1.3							
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3							
2x3/2-way single solenoid, closed (T32N)	Q	1.3							
2x3/2-way single solenoid, open (T32F)	P	1.3							
2x3/2-way single solenoid, open/closed (T32W)	R	1.3							
2x2/2-way single solenoid, closed (T22C)	VC	1.3							
2x2/2-way single solenoid, closed (T22CV)	VV	1.3							

Materials							
Housing	Die-cast aluminium, PA						
Seals	FPM, NBR, HNBR						
Screws	Galvanised steel						
Note on materials	RoHS-compliant RoHS-compliant						

<u> </u>	Terminal	SVA, MO non-detenting/detenting (D) Valve function	Valve	Width	Part no.	Туре
	code		code			
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	561155	VSVA-B-T22C-AZD-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	561159	VSVA-B-T22CV-AZD-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	539178	VSVA-B-T32U-AZD-A2-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	539176	VSVA-B-T32C-AZD-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	539180	VSVA-B-T32H-AZD-A2-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	539179	VSVA-B-T32F-AZD-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	18 mm	539177	VSVA-B-T32N-AZD-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	539181	VSVA-B-T32W-AZD-A2-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	18 mm	539184	VSVA-B-M52-AZD-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	539185	VSVA-B-M52-MZD-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	539182	VSVA-B-B52-ZD-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	539183	VSVA-B-D52-ZD-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	539186	VSVA-B-P53U-ZD-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	539188	VSVA-B-P53C-ZD-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	539187	VSVA-B-P53E-ZD-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8031814	VSVA-B-P53ED-ZD-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8031818	VSVA-B-P53EP-ZD-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	18 mm	8031815	VSVA-B-P53AD-ZD-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, me	P53BD	18 mm	8031817	VSVA-B-P53BD-ZD-A2-1T1L
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	M52-M	18 mm	573201	VSVA-B-M52-MZD-A2-1T1L-APX-0.
	SO SO	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	M52-M	18 mm	573202	VSVA-B-M52-MZD-A2-1T1L-APP

ordoring duta octori		/SVA with cover cap for MO non-detenting/heavy duty, o Valve function	Valve	Width	Part no.	Typo
	code	valve function	code	Width	Part 110.	Type
Solenoid valves	couc		code			
	VC	2x 2/2-way valve, single solenoid,	T22C	18 mm	8033457	VSVA-B-T22C-AZTR-A2-1T1L
	VC	normally closed,	1220	10 111111	6033437	V3VA-B-122C-AZ1R-AZ-111L
10		pneumatic spring return				
	VV	2x 2/2-way valve, single solenoid,	T22CV	18 mm	8033458	VSVA-B-T22CV-AZTR-A2-1T1L
A CONTRACTOR OF THE PROPERTY O		normally closed,				
		pneumatic spring return,				
		vacuum operation possible at 3 and 5				
	N	2x 3/2-way valve, single solenoid,	T32U	18 mm	8033446	VSVA-B-T32U-AZTR-A2-1T1L
		normally open				
	K	2x 3/2-way valve, single solenoid,	T32C	18 mm	8033444	VSVA-B-T32C-AZTR-A2-1T1L
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	18 mm	8033448	VSVA-B-T32H-AZTR-A2-1T1L
		1x normally open, 1x normally closed	Tool	4.0	0000//=	VOVA D TOOK ATTD AG ATAL
	Р	2x 3/2-way valve, single solenoid,	T32F	18 mm	8033447	VSVA-B-T32F-AZTR-A2-1T1L
		reverse operation, normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	18 mm	8033445	VSVA-B-T32N-AZTR-A2-1T1L
	٧	reverse operation,	I J Z IN	10 111111	0033443	TOTALD-IDENTALIN-ME-TITE
		normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	18 mm	8033449	VSVA-B-T32W-AZTR-A2-1T1L
		reverse operation,				
		1x normally open, 1x normally closed				
	M	5/2-way valve, single solenoid,	M52-A	18 mm	8033452	VSVA-B-M52-AZTR-A2-1T1L
		pneumatic spring return				
	0	5/2-way valve, single solenoid,	M52-M	18 mm	8033453	VSVA-B-M52-MZTR-A2-1T1L
		mechanical spring return				
	J	5/2-way valve, double solenoid	B52	18 mm	8033450	VSVA-B-B52-ZTR-A2-1T1L
	D	5/2-way valve, double solenoid,	D52	18 mm	8033451	VSVA-B-D52-ZTR-A2-1T1L
		with dominant signal				
	В	5/3-way solenoid valve,	P53U	18 mm	8033454	VSVA-B-P53U-ZTR-A2-1T1L
		mid-position pressurised				
	G	5/3-way solenoid valve,	P53C	18 mm	8033456	VSVA-B-P53C-ZTR-A2-1T1L
	-	mid-position closed	DESE	10	0022455	VCVA D DESC 7TD AS 4T41
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	8033455	VSVA-B-P53E-ZTR-A2-1T1L
	SA	5/3-way solenoid valve,	P53ED	18 mm	8039181	VSVA-B-P53ED-ZTR-A2-1T1L
	3A	mid-position exhausted, switching position 14	FOOLD	10 111111	8039181	V3VA-B-F33ED-Z1R-AZ-111L
		detenting, mechanical spring return				
	SE	5/3-way solenoid valve,	P53EP	18 mm	8039190	VSVA-B-P53EP-ZTR-A2-1T1L
	-	mid-position exhausted, switching position 12	. 33=		000,000	
		detenting, mechanical spring return				
	SB	5/3-way solenoid valve,	P53AD	18 mm	8039184	VSVA-B-P53AD-ZTR-A2-1T1L
		mid-position 1x exhausted from 4 to 5, 1x pressurised				
		from 1 to 2, switching position 14 detenting,				
		same function in both switching positions: pressurised				
		from 1 to 4 and exhausted from 2 to 3,				
		mechanical spring return				
	SD	5/3-way solenoid valve,	P53BD	18 mm	8040110	VSVA-B-P53BD-ZTR-A2-1T1L
		mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting,				
		same function in both switching positions: pressurised				
		from 1 to 2 and exhausted from 4 to 5,				
		mechanical spring return				
<u> </u>	SS	5/2-way valve, single solenoid, mechanical spring	M52-M	18 mm	8033459	VSVA-B-M52-MZTR-A2-1T1L-APX-0.5
		return, inductive sensor with PNP output with 0.5 m	_			
		connecting cable and 4-pin sensor push-in connector				
		M12x1				
	S0	5/2-way valve, single solenoid, mechanical spring	M52-M	18 mm	8033460	VSVA-B-M52-MZTR-A2-1T1L-APP
		return, inductive sensor with PNP output and 3-pin				
\ IAI •		sensor push-in connector M8x1				

	1	SVA with cover cap for MO, non-detenting (H) Valve function	Valve	Width	Part no.	Туре
	code	valve fulletion	code	Width	Tartio.	Туре
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid,	T22C	18 mm	8033475	VSVA-B-T22C-AZH-A2-1T1L
310		normally closed,				
		pneumatic spring return				
in the second	VV	2x 2/2-way valve, single solenoid,	T22CV	18 mm	8033476	VSVA-B-T22CV-AZH-A2-1T1L
		normally closed, pneumatic spring return,				
	*	vacuum operation possible at 3 and 5				
	N	2x 3/2-way valve, single solenoid,	T32U	18 mm	8033464	VSVA-B-T32U-AZH-A2-1T1L
	''	normally open	.520		0000101	
	K	2x 3/2-way valve, single solenoid,	T32C	18 mm	8033462	VSVA-B-T32C-AZH-A2-1T1L
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	18 mm	8033466	VSVA-B-T32H-AZH-A2-1T1L
		1x normally open, 1x normally closed				
	P	2x 3/2-way valve, single solenoid,	T32F	18 mm	8033465	VSVA-B-T32F-AZH-A2-1T1L
		reverse operation, normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	18 mm	8033463	VSVA-B-T32N-AZH-A2-1T1L
	٧	reverse operation,	13211	10 111111	8055405	V3VA-B-132N-A211-A2-111L
		normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	18 mm	8033467	VSVA-B-T32W-AZH-A2-1T1L
		reverse operation,				
		1x normally open, 1x normally closed				
	M	5/2-way valve, single solenoid,	M52-A	18 mm	8033470	VSVA-B-M52-AZH-A2-1T1L
		pneumatic spring return				
	0	5/2-way valve, single solenoid,	M52-M	18 mm	8033471	VSVA-B-M52-MZH-A2-1T1L
	1	mechanical spring return 5/2-way valve, double solenoid	B52	18 mm	8033468	VSVA-B-B52-ZH-A2-1T1L
	,	3/2-way valve, double solelloid	D52	18 111111	6033466	V3VA-D-D3Z-ZN-AZ-111L
	D	5/2-way valve, double solenoid,	D52	18 mm	8033469	VSVA-B-D52-ZH-A2-1T1L
		with dominant signal	232	20	0000 100	
	В	5/3-way solenoid valve,	P53U	18 mm	8033472	VSVA-B-P53U-ZH-A2-1T1L
		mid-position pressurised				
	G	5/3-way solenoid valve,	P53C	18 mm	8033474	VSVA-B-P53C-ZH-A2-1T1L
		mid-position closed				
	E	5/3-way solenoid valve,	P53E	18 mm	8033473	VSVA-B-P53E-ZH-A2-1T1L
		mid-position exhausted				
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting,	P53ED	18 mm	8039182	VSVA-B-P53ED-ZH-A2-1T1L
		mechanical spring return				
	SE	5/3-way solenoid valve,	P53EP	18 mm	8039191	VSVA-B-P53EP-ZH-A2-1T1L
		mid-position exhausted, switching position 12 detenting,	. 332.	20	000,1,1	
		mechanical spring return				
	SB	5/3-way solenoid valve,	P53AD	18 mm	8039185	VSVA-B-P53AD-ZH-A2-1T1L
		mid-position 1x exhausted from 4 to 5, 1x pressurised				
		from 1 to 2, switching position 14 detenting,				
		same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3,				
		mechanical spring return				
	SD	5/3-way solenoid valve,	P53BD	18 mm	8040111	VSVA-B-P53BD-ZH-A2-1T1L
		mid-position 1x exhausted from 2 to 3, 1x pressurised				
		from 1 to 4, switching position 14 detenting,				
		same function in both switching positions: pressurised				
		from 1 to 2 and exhausted from 4 to 5,				
	- CC	mechanical spring return	1450 11	10	00001==	VCVA D MES MEN AS
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting	M52-M	18 mm	8033477	VSVA-B-M52-MZH-A2-1T1L-
		cable and 4-pin sensor push-in connector M12x1				APX-0.5
	SO	5/2-way valve, single solenoid, mechanical spring return,	M52-M	18 mm	8033478	VSVA-B-M52-MZH-A2-1T1L-AP
		inductive sensor with PNP output and 3-pin sensor push-	14172-141		0033770	TOTA D MISE MEHTAL-TITLAF
	4	in connector M8x1				

Ordering data – Solen		/SVA with cover cap for MO, concealed	l., .	L	ls .	1-
	Terminal code	Valve function	Valve code	Width	Part no.	Type
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	8033493	VSVA-B-T22C-AZ-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	8033494	VSVA-B-T22CV-AZ-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	8033482	VSVA-B-T32U-AZ-A2-1T1L
	К	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	8033480	VSVA-B-T32C-AZ-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	8033484	VSVA-B-T32H-AZ-A2-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	8033483	VSVA-B-T32F-AZ-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, Normally closed	T32N	18 mm	8033481	VSVA-B-T32N-AZ-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	8033485	VSVA-B-T32W-AZ-A2-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	18 mm	8033488	VSVA-B-M52-AZ-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	8033489	VSVA-B-M52-MZ-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	8033486	VSVA-B-B52-Z-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	8033487	VSVA-B-D52-Z-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	8033490	VSVA-B-P53U-Z-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	8033492	VSVA-B-P53C-Z-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	8033491	VSVA-B-P53E-Z-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8039183	VSVA-B-P53ED-Z-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8039192	VSVA-B-P53EP-Z-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	18 mm	8039186	VSVA-B-P53AD-Z-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	18 mm	8040112	VSVA-B-P53BD-Z-A2-1T1L
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	M52-M	18 mm	8033495	VSVA-B-M52-MZ-A2-1T1L- APX-0.5
	SO	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	M52-M	18 mm	8033496	VSVA-B-M52-MZ-A2-1T1L-APP

Datasheet - Solenoid valve width 26 mm

- [] - Valve width to ISO 15407-2 26 mm

> Voltage 24 V DC

Flow rate Valve width 26 mm: VTSA up to 1100 l/min VTSA-F up to 1350 l/min VTSA-F-CB up to 1350 l/min



Subject to change – 2025/06

Safety characteristics for valve		
Conforms to standard		EN 13849-1/2
CE marking (see	Direct voltage	To EU EMC Directive 1) (solenoid valves with sensor only)
declaration of conformity)	24 V DC	
Shock resistance		Shock test with severity level 2, to EN 60068-2-27
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6

 $^{1) \}quad \text{For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/...} \ d \ Support/Downloads.$ If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety characteristics for valve								
Valve function (with valve code)	Terminal	Test pulses						
	code	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [µs]					
5/2-way double solenoid (B52)	J	1200	1100					
5/2-way double solenoid with dominant signal (D52)	D	1200	1100					
5/2-way single solenoid (M52A)	M	1200	1100					
5/2-way single solenoid (M52M)	0	1200	1100					
5/3-way closed (P53C)	G	1200	1100					
5/3-way exhausted (P53E)	E	1200	1100					
5/3-way pressurised (P53U)	В	1200	1100					
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1200	1100					
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1200	1100					
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1200	1100					
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1200	1100					
2x3/2-way single solenoid, closed (T32C)	К	1500	1200					
2x3/2-way single solenoid, open (T32U)	N	1500	1200					
2x3/2-way single solenoid, open/closed (T32H)	Н	1500	1200					
2x3/2-way single solenoid, closed (T32N)	Q	1500	1200					
2x3/2-way single solenoid, open (T32F)	Р	1500	1200					
2x3/2-way single solenoid, open/closed (T32W)	R	1500	1200					
2x2/2-way single solenoid, closed (T22C)	VC	1500	1200					
2x2/2-way single solenoid, closed (T22CV)	VV	1500	1200					

Datasheet – Solenoid valve width 26 mm

Datasheet for valve Valve function (with valve code)	Torminal	Terminal Flow direction				Reset method		
valve function (with valve code)	code	Any	Only reversible	Not reversible	Pneumatic spring	Mechanical spring	_ Weight [g]	
5/2-way double solenoid (B52)	J	-	_	_	_	_	276	
5/2-way double solenoid with dominant signal (D52)	D	•	_	_	_	-	276	
5/2-way single solenoid (M52A)	M	•	_	_	•	-	293	
5/2-way single solenoid (M52M)	0	•	_	_	_	•	293	
5/3-way closed1) (P53C)	G	•	_	_	_	•	320	
5/3-way exhausted1) (P53E)	E	•	_	_	_	•	320	
5/3-way pressurised1) (P53U)	В	•	_	_	_	•	320	
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	-	_	•	-	•	291	
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	-	_	•	-	-	291	
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	•	_	_	-	-	301	
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	-	_	•	-	•	301	
2x3/2-way single solenoid, closed (T32C)	K	_	_	•	•	_	335	
2x3/2-way single solenoid, open (T32U)	N	-	_	•	•	-	335	
2x3/2-way single solenoid, open/closed (T32H)	Н	_	_	•	•	-	335	
2x3/2-way single solenoid, closed (T32N)	Q	_	•	_	•	-	335	
2x3/2-way single solenoid, open (T32F)	Р	-	•	_		_	335	
2x3/2-way single solenoid, open/closed (T32W)	R	_	•	_	•	_	335	
2x2/2-way single solenoid, closed (T22C)	VC	-	_	•	•	-	335	
2x2/2-way single solenoid, closed (T22CV)	VV		_	_	•	_	335	

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Datasheet - Solenoid valve width26 mm

Valve function (with valve code)	Terminal	Flow rate					
	code	Valve	Valve on valv	Valve on valve terminal			
			VTSA	VTSA-F	VTSA-F-CB	sub-base	
5/2-way double solenoid (B52)	J	1400	1100	1350	1350	1200	
5/2-way double solenoid with dominant signal (D52)	D	1400	1100	1350	1350	1200	
5/2-way single solenoid (M52A)	M	1400	1100	1350	1350	1200	
5/2-way single solenoid (M52M)	0	1400	1100	1350	1350	1200	
5/3-way closed (P53C)	G	1400 ¹⁾	10001)	1350 ¹⁾	1350 ¹⁾	1200 ¹⁾	
		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way exhausted (P53E)	E	14001)	10001)	1350 ¹⁾	1350 ¹⁾	12001)	
		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way pressurised (P53U)	В	14001)	10001)	1350 ¹⁾	1350 ¹⁾	12001)	
		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way exhausted, switching position 14 detenting	SA	1400 ¹⁾	1000 ¹⁾	1350 ¹⁾	1350 ¹⁾	1200 ¹⁾	
(P53ED)		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way exhausted, switching position 12 detenting	SE	1400 ¹⁾	1000 ¹⁾	1350 ¹⁾	1350 ¹⁾	1200 ¹⁾	
(P53EP)		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way, port 2 pressurised, 4 exhausted, switching	SB	700 ¹⁾	700 ¹⁾	700 ¹⁾	700 ¹⁾	700 ¹⁾	
position 14 detenting (P53AD)		700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾	
5/3-way, port 4 pressurised, 2 exhausted, switching	SD	_	850 ¹⁾	950 ¹⁾	950 ¹⁾	900 ¹⁾	
position 14 detenting (P53BD)			820 ²⁾	860 ²⁾	860 ²⁾	840 ²⁾	
2x3/2-way single solenoid, closed (T32C)	K	1250	900	1150	1150	1100	
2x3/2-way single solenoid, open (T32U)	N	1250	900	1150	1150	1100	
2x3/2-way single solenoid, open/closed (T32H)	Н	1250	900	1150	1150	1100	
2x3/2-way single solenoid, closed (T32N)	Q	1250	900	1150	1150	1100	
2x3/2-way single solenoid, open (T32F)	Р	1250	900	1150	1150	1100	
2x3/2-way single solenoid, open/closed (T32W)	R	1250	900	1150	1150	1100	
2x2/2-way single solenoid, closed (T22C)	VC	1350	1000	1300	1300	1100	
2x2/2-way single solenoid, closed (T22CV)	VV	1350	1000	1300	1300	1100	

¹⁾ Switching position

- 🌓

Note

The solenoid valves VSVA-B-P53BD...-A1-1T1L (terminal code SD) can be operated without restrictions at an operating pressure of less than 6 bar. At an operating pressure of more than 6 bar, the actual flow rate must not exceed 1900 l/min (e.g. 10-->2 bar) or these solenoid valves may switch unintentionally (to the mid-position or switching position 14).

At pressures above 6 bar, it is possible to prevent the flow rate from becoming too high by using a flow control valve or orifice (e.g. a reducing nipple on port 2 or 4 from G1/4 to G1/8).

²⁾ Mid-position

Datasheet – Solenoid valve width 26 mm

Valve switching times in [ms]				
Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	_	18
5/2-way double solenoid with dominant signal (D52)	D	_	_	21
5/2-way single solenoid (M52A)	M	25	45	_
5/2-way single solenoid (M52M)	0	20	65	-
5/3-way closed (P53C)	G	22	65	_
5/3-way exhausted (P53E)	E	22	65	_
5/3-way pressurised (P53U)	В	22	65	_
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	22 for control side 12 9 for control side 14	49 for control side 12	33
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	10 for control side 12 22 for control side 14	50 for control side 14	40
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	19 for control side 12 9 for control side 14	36 for control side 12	32
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	16 for control side 12 9 for control side 14	26 for control side 12 36 for control side 14	-
2x3/2-way single solenoid, closed (T32C)	K	20	38	-
2x3/2-way single solenoid, open (T32U)	N	20	38	_
2x3/2-way single solenoid, open/closed (T32H)	Н	20	38	-
2x3/2-way single solenoid, closed (T32N)	Q	32	30	_
2x3/2-way single solenoid, open (T32F)	Р	32	30	_
2x3/2-way single solenoid, open/closed (T32W)	R	32	30	_
2x2/2-way single solenoid, closed (T22C)	VC	20	38	-
2x2/2-way single solenoid, closed (T22CV)	VV	20	38	_

Characteristic coil data		
Valve function (with valve code)	Terminal code	Characteristic coil data at 24 V DC in [W]
5/2-way double solenoid (B52)	J	1.6
5/2-way double solenoid with dominant signal (D52)	D	1.3
5/2-way single solenoid (M52A)	M	1.6
5/2-way single solenoid (M52M)	0	1.6
5/3-way closed (P53C)	G	1.6
5/3-way exhausted (P53E)	E	1.6
5/3-way pressurised (P53U)	В	1.6
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1.6
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1.6
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1.6
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1.6
2x3/2-way single solenoid, closed (T32C)	K	1.3
2x3/2-way single solenoid, open (T32U)	N	1.3
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3
2x3/2-way single solenoid, closed (T32N)	Q	1.3
2x3/2-way single solenoid, open (T32F)	Р	1.3
2x3/2-way single solenoid, open/closed (T32W)	R	1.3
2x2/2-way single solenoid, closed (T22C)	VC	1.3
2x2/2-way single solenoid, closed (T22CV)	VV	1.3

Materials						
Housing	Die-cast aluminium, PA					
Seals	FPM, NBR, HNBR					
Screws	Galvanised steel					
Note on materials	RoHS-compliant					

Ordering data – Solen	1	/SVA, MO non-detenting/detenting (D)	ı	ı	ı	1
	Terminal code	Valve function	Valve	Width	Part no.	Туре
a	code		code			
Solenoid valves	VC	2: 2/2	Taac	26	F(1140	VSVA-B-T22C-AZD-A1-1T1L
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	26 mm	561149	V5VA-B-122C-AZD-A1-111L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	561153	VSVA-B-T22CV-AZD-A1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	539152	VSVA-B-T32U-AZD-A1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	539150	VSVA-B-T32C-AZD-A1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	539154	VSVA-B-T32H-AZD-A1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	539153	VSVA-B-T32F-AZD-A1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	539151	VSVA-B-T32N-AZD-A1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	539155	VSVA-B-T32W-AZD-A1-1T1L
	М	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	539158	VSVA-B-M52-AZD-A1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	539159	VSVA-B-M52-MZD-A1-1T1L
	J	5/2-way valve, double solenoid	B52	26 mm	539156	VSVA-B-B52-ZD-A1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	539157	VSVA-B-D52-ZD-A1-1T1L
	В	5/3-way solenoid valve, Mid-position pressurised	P53U	26 mm	539160	VSVA-B-P53U-ZD-A1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	539162	VSVA-B-P53C-ZD-A1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	539161	VSVA-B-P53E-ZD-A1-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	26 mm	560727	VSVA-B-P53ED-ZD-A1-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	26 mm	8026638	VSVA-B-P53EP-ZD-A1-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, me	P53AD	26 mm	560728	VSVA-B-P53AD-ZD-A1-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, me	P53BD	26 mm	8031816	VSVA-B-P53BD-ZD-A1-1T1L
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	M52-M	26 mm	570850	VSVA-B-M52-MZD-A1-1T1L-APX-0.5
	50	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	M52-M	26 mm	560724	VSVA-B-M52-MZD-A1-1T1L-APP

		/SVA with cover cap for MO non-detenting/heavy duty, o Valve function	Valve	Width	Part no.	Туре
	code	valve function	code	Width	raitiio.	Туре
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid,	T22C	26 mm	8033032	VSVA-B-T22C-AZTR-A1-1T1L
		normally closed,		20	0033032	
		pneumatic spring return				
	VV	2x 2/2-way valve, single solenoid,	T22CV	26 mm	8033033	VSVA-B-T22CV-AZTR-A1-1T1L
		normally closed,				
		pneumatic spring return,				
~		vacuum operation possible at 3 and 5				
	N	2x 3/2-way valve, single solenoid,	T32U	26 mm	8033015	VSVA-B-T32U-AZTR-A1-1T1L
	.,	normally open				
	K	2x 3/2-way valve, single solenoid,	T32C	26 mm	8033013	VSVA-B-T32C-AZTR-A1-1T1L
	Н	normally closed 2x 3/2-way valve, single solenoid,	T32H	26 mm	9022017	VEVA D TOOL ATTD A4 4T41
	П	1x normally open, 1x normally closed	1320	26 111111	8033017	VSVA-B-T32H-AZTR-A1-1T1L
	P	2x 3/2-way valve, single solenoid,	T32F	26 mm	8033016	VSVA-B-T32F-AZTR-A1-1T1L
	F	reverse operation,	1321	20 111111	8033010	V3VA-B-1321-A21R-A1-111L
		normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	26 mm	8033014	VSVA-B-T32N-AZTR-A1-1T1L
		reverse operation,				
		normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	26 mm	8033018	VSVA-B-T32W-AZTR-A1-1T1L
		reverse operation,				
		1x normally open, 1x normally closed				
	M	5/2-way valve, single solenoid,	M52-A	26 mm	8033021	VSVA-B-M52-AZTR-A1-1T1L
	_	pneumatic spring return				
	0	5/2-way valve, single solenoid,	M52-M	26 mm	8033022	VSVA-B-M52-MZTR-A1-1T1L
	1	mechanical spring return	DE 2	26 mm	9022010	VCVA D DE2 7TD A4 4T41
	J	5/2-way valve, double solenoid	B52	26 mm	8033019	VSVA-B-B52-ZTR-A1-1T1L
	D	5/2-way valve, double solenoid,	D52	26 mm	8033020	VSVA-B-D52-ZTR-A1-1T1L
		with dominant signal	0) 2	20 111111	0033020	V3VA-B-D32-Z1K-A1-111E
	В	5/3-way solenoid valve,	P53U	26 mm	8033023	VSVA-B-P53U-ZTR-A1-1T1L
		mid-position pressurised	. 330	20	0033023	
	G	5/3-way solenoid valve,	P53C	26 mm	8033025	VSVA-B-P53C-ZTR-A1-1T1L
		mid-position closed				
	E	5/3-way solenoid valve,	P53E	26 mm	8033024	VSVA-B-P53E-ZTR-A1-1T1L
		mid-position exhausted				
	SA	5/3-way solenoid valve,	P53ED	26 mm	8033028	VSVA-B-P53ED-ZTR-A1-1T1L
		mid-position exhausted, switching position 14				
		detenting, mechanical spring return				
	SE	5/3-way solenoid valve,	P53EP	26 mm	8033035	VSVA-B-P53EP-ZTR-A1-1T1L
		mid-position exhausted, switching position 12 detenting, mechanical spring return				
	SB	5/3-way solenoid valve,	P53AD	26 mm	8033029	VSVA-B-P53AD-ZTR-A1-1T1L
	SD	mid-position 1x exhausted from 4 to 5, 1x pressurised	PSSAD	26 111111	8033029	V3VA-B-P33AD-Z1R-A1-111L
		from 1 to 2, switching position 14 detenting,				
		same function in both switching positions:				
		pressurised from 1 to 4 and exhausted from 2 to 3,				
		mechanical spring return				
	SD	5/3-way solenoid valve,	P53BD	26 mm	8039187	VSVA-B-P53BD-ZTR-A1-1T1L
		mid-position 1x exhausted from 2 to 3, 1x pressurised				
		from 1 to 4, switching position 14 detenting,				
		same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5,				
		mechanical spring return				
<u> </u>	SS	5/2-way valve, single solenoid, mechanical spring	M52-M	26 mm	8033034	VSVA-B-M52-MZTR-A1-1T1L-APX-0.5
		return, inductive sensor with PNP output with 0.5 m	14172-141	20 111111	000004	TOTAL DINIZE METRIALITIES AFA-0.5
		connecting cable and 4-pin sensor push-in connector				
		M12x1				
	S0	5/2-way valve, single solenoid, mechanical spring	M52-M	26 mm	8033027	VSVA-B-M52-MZTR-A1-1T1L-APP
		return, inductive sensor with PNP output and 3-pin				
- III an		sensor push-in connector M8x1				

	Terminal	Valve function	Valve	Width	Part no.	Type
	code	Take fulletion	code	· · · · · · · · · · · · · · · · · · ·		.,,,,,
olenoid valves						
	VC	2x 2/2-way valve, single solenoid,	T22C	26 mm	8033055	VSVA-B-T22C-AZH-A1-1T1L
		normally closed,				
		pneumatic spring return				
	VV	2x 2/2-way valve, single solenoid, normally closed,	T22CV	26 mm	8033056	VSVA-B-T22CV-AZH-A1-1T1L
		pneumatic spring return,				
***		vacuum operation possible at 3 and 5				
	N	2x 3/2-way valve, single solenoid,	T32U	26 mm	8033038	VSVA-B-T32U-AZH-A1-1T1L
		normally open				
	K	2x 3/2-way valve, single solenoid,	T32C	26 mm	8033036	VSVA-B-T32C-AZH-A1-1T1L
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	26 mm	8033040	VSVA-B-T32H-AZH-A1-1T1L
	P	1x normally open, 1x normally closed	Taar	26	0022020	VCVA D T225 A7H A4 4T41
	P	2x 3/2-way valve, single solenoid, reverse operation,	T32F	26 mm	8033039	VSVA-B-T32F-AZH-A1-1T1L
		normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	26 mm	8033037	VSVA-B-T32N-AZH-A1-1T1L
		reverse operation,				
		Normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	26 mm	8033041	VSVA-B-T32W-AZH-A1-1T1L
		reverse operation,				
	M	1x normally open, 1x normally closed	MESA	26	0022044	VSVA-B-M52-AZH-A1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	8033044	V2A-P-W27-YZH-YI-111F
	0	5/2-way valve, single solenoid,	M52-M	26 mm	8033045	VSVA-B-M52-MZH-A1-1T1L
		mechanical spring return	111,52 111	20111111	0033043	VOIN D MISE MEM NE TITE
	J	5/2-way valve, double solenoid	B52	26 mm	8033042	VSVA-B-B52-ZH-A1-1T1L
	D	5/2-way valve, double solenoid,	D52	26 mm	8033043	VSVA-B-D52-ZH-A1-1T1L
		with dominant signal		-		
	В	5/3-way solenoid valve,	P53U	26 mm	8033046	VSVA-B-P53U-ZH-A1-1T1L
	G	mid-position pressurised	DEOC	26	0022040	VCVA D DESC 7U A4 4T41
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	8033048	VSVA-B-P53C-ZH-A1-1T1L
	E	5/3-way solenoid valve,	P53E	26 mm	8033047	VSVA-B-P53E-ZH-A1-1T1L
	-	mid-position exhausted		20111111	0033047	13111 312 211 112 2112
	SA	5/3-way solenoid valve,	P53ED	26 mm	8033051	VSVA-B-P53ED-ZH-A1-1T1
		mid-position exhausted, switching position 14 detenting,				
		mechanical spring return				
	SE	5/3-way solenoid valve,	P53EP	26 mm	8033058	VSVA-B-P53EP-ZH-A1-1T1L
		mid-position exhausted, switching position 12 detenting, mechanical spring return				
	SB	5/3-way solenoid valve,	P53AD	26 mm	8033052	VSVA-B-P53AD-ZH-A1-1T1L
	30	mid-position 1x exhausted from 4 to 5, 1x pressurised	FJJAD	20 111111	8033032	V3VA-B-F33AD-ZII-A1-111L
		from 1 to 2, switching position 14 detenting,				
		same function in both switching positions: pressurised				
		from 1 to 4 and exhausted from 2 to 3,				
		mechanical spring return				
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised	P53BD	26 mm	8039188	VSVA-B-P53BD-ZH-A1-1T1L
		from 1 to 4, switching position 14 detenting,				
		same function in both switching positions: pressurised				
		from 1 to 2 and exhausted from 4 to 5,				
		mechanical spring return				
	SS	5/2-way valve, single solenoid, mechanical spring return,	M52-M	26 mm	8033057	VSVA-B-M52-MZH-A1-1T1L-
		inductive sensor with PNP output with 0.5 m connecting				APX-0.5
	50	cable and 4-pin sensor push-in connector M12x1	ME 2 M	26	0022052	VCVA D MED MED MED AT ATAL AT
RI STATE OF THE ST	SO SO	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-	M52-M	26 mm	8033050	VSVA-B-M52-MZH-A1-1T1L-AP
		in connector M8x1				

Ordering data – Solen	oid valve V	SVA with cover cap for MO, concealed				
	Terminal code	Valve function	Valve code	Width	Part no.	Туре
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	26 mm	8033078	VSVA-B-T22C-AZ-A1-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	8033079	VSVA-B-T22CV-AZ-A1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	8033061	VSVA-B-T32U-AZ-A1-1T1L
	К	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	8033059	VSVA-B-T32C-AZ-A1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	8033063	VSVA-B-T32H-AZ-A1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	8033062	VSVA-B-T32F-AZ-A1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	8033060	VSVA-B-T32N-AZ-A1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	8033064	VSVA-B-T32W-AZ-A1-1T1L
	М	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	8033067	VSVA-B-M52-AZ-A1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	8033068	VSVA-B-M52-MZ-A1-1T1L
	J	5/2-way valve, double solenoid	B52	26 mm	8033065	VSVA-B-B52-Z-A1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	8033066	VSVA-B-D52-Z-A1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	26 mm	8033069	VSVA-B-P53U-Z-A1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	8033071	VSVA-B-P53C-Z-A1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	8033070	VSVA-B-P53E-Z-A1-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	26 mm	8033074	VSVA-B-P53ED-Z-A1-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	26 mm	8033081	VSVA-B-P53EP-Z-A1-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	26 mm	8033075	VSVA-B-P53AD-Z-A1-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	26 mm	8039189	VSVA-B-P53BD-Z-A1-1T1L
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	M52-M	26 mm	8033080	VSVA-B-M52-MZ-A1-1T1L- APX-0.5
	SO	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	M52-M	26 mm	8033073	VSVA-B-M52-MZ-A1-1T1L-APP

Datasheet - Solenoid valve width 42 mm

Valve width to ISO 5599-2 42 mm (ISO 1)

Voltage 24 V DC

Flow rate
Valve width 42 mm:
VTSA up to 1300 l/min
VTSA-F up to 1860 l/min
VTSA-F-CB up to 1860 l/min



Safety characteristics for valve	
Conforms to standard	EN 13849-1/2
Shock resistance	Shock test with severity level 2, to EN 60068-2-27
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6

Valve function (with valve code)	Terminal	Test pulses				
	code	Max. positive test pulse with 0 signal [μs]	Max. negative test pulse with 1 signal [µs]			
5/2-way double solenoid (B52)	J	1400	900			
5/2-way double solenoid with dominant signal (D52)	D	1600	1100			
5/2-way single solenoid (M52A)	M	1400	900			
5/2-way single solenoid (M52M)	0	1400	900			
5/3-way closed (P53C)	G	1400	900			
5/3-way exhausted (P53E)	E	1400	900			
5/3-way pressurised (P53U)	В	1400	900			
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	_	_			
2x3/2-way single solenoid, closed (T32C)	K	1600	1100			
2x3/2-way single solenoid, open (T32U)	N	1600	1100			
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1100			
2x3/2-way single solenoid, closed (T32N)	Q	1600	1100			
2x3/2-way single solenoid, open (T32F)	Р	1600	1100			
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1100			
2x2/2-way single solenoid, closed (T22C)	VC	1600	1100			
2x2/2-way single solenoid, closed (T22CV)	VV	1600	1100			

Datasheet – Solenoid valve width 42 mm

Datasheet for valve	1	l=			ls		1
Valve function (with valve code)	1	Flow direction			Reset method	Weight	
	code	Any	Only reversible	Not reversible	Pneumatic	Mechanical	[g]
					spring	spring	
5/2-way double solenoid (B52)	J	-	_	_	_	_	439
5/2-way double solenoid with dominant signal	D	•	_	_	_	_	439
(D52)							
5/2-way single solenoid (M52A)	M	-	_	_	-	_	426
5/2-way single solenoid (M52M)	0	•	_	_	_	•	426
5/3-way closed1) (P53C)	G	•	_	_	_	•	456
5/3-way exhausted1) (P53E)	E	•	_	-	_	•	456
5/3-way pressurised1) (P53U)	В	-	_	-	-	•	456
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	•	_	_	_	_	456
2x3/2-way single solenoid, closed (T32C)	K	_	_	•	•	_	442
2x3/2-way single solenoid, open (T32U)	N	_	_	-	•	-	442
2x3/2-way single solenoid, open/closed (T32H)	Н	_	_	•	•	-	442
2x3/2-way single solenoid, closed (T32N)	Q	_	•	_	•	-	442
2x3/2-way single solenoid, open (T32F)	Р	_	•	_	•	_	442
2x3/2-way single solenoid, open/closed (T32W)	R	_	•	_	•	_	442
2x2/2-way single solenoid, closed (T22C)	VC	-	-	•	•	_	442
2x2/2-way single solenoid, closed (T22CV)	VV	•	_	_	•	-	442

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve function (with valve code)	Terminal	Flow rate						
	code	Valve	Valve on valv			Valve on individual		
			VTSA	VTSA-F	VTSA-F-CB	sub-base		
5/2-way double solenoid (B52)	J	2000	1300	1860	1860	1500		
5/2-way double solenoid with dominant signal (D52)	D	2000	1300	1860	1860	1500		
5/2-way single solenoid (M52A)	M	2000	1300	1860	1860	1500		
5/2-way single solenoid (M52M)	0	2000	1300	1860	1860	1500		
5/3-way closed (P53C)	G	1900 ¹⁾	1200 ¹⁾	1690 ¹⁾	1690 ¹⁾	1400 ¹⁾		
		950 ²⁾	800 ²⁾	830 ²⁾	830 ²⁾	800 ²⁾		
5/3-way exhausted (P53E)	E	1900 ¹⁾	1200 ¹⁾	1690 ¹⁾	1690 ¹⁾	1400 ¹⁾		
		950 ²⁾	800 ²⁾	830 ²⁾	830 ²⁾	800 ²⁾		
5/3-way pressurised (P53U)	В	1900 ¹⁾	1200 ¹⁾	1690 ¹⁾	1690 ¹⁾	1400 ¹⁾		
		950 ²⁾	800 ²⁾	830 ²⁾	830 ²⁾	800 ²⁾		
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	1700 ¹⁾	1400 ¹⁾	1700 ¹⁾	1700 ¹⁾	1400 ¹⁾		
		700 ²⁾	800 ²⁾	700 ²⁾	700 ²⁾	700 ²⁾		
2x3/2-way single solenoid, closed (T32C)	K	1600	1200	1300	1300	1200		
2x3/2-way single solenoid, open (T32U)	N	1600	1200	1300	1300	1200		
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1200	1300	1300	1200		
2x3/2-way single solenoid, closed (T32N)	Q	1600	1200	1300	1300	1200		
2x3/2-way single solenoid, open (T32F)	Р	1600	1200	1300	1300	1200		
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1200	1300	1300	1200		
2x2/2-way single solenoid, closed (T22C)	VC	1600	1400	1500	1500	1400		
2x2/2-way single solenoid, closed (T22CV)	VV	1600	1400	1500	1500	1400		

¹⁾ Switching position

²⁾ Mid-position

Datasheet – Solenoid valve width 42 mm

Valve switching times in [ms]				
Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	-	16
5/2-way double solenoid with dominant signal (D52)	D	_	-	19
5/2-way single solenoid (M52A)	M	27	45	-
5/2-way single solenoid (M52M)	0	22	60	_
5/3-way closed (P53C)	G	22	65	38
5/3-way exhausted (P53E)	E	22	65	38
5/3-way pressurised (P53U)	В	22	65	38
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	22	65	38
2x3/2-way single solenoid, closed (T32C)	K	20	38	-
2x3/2-way single solenoid, open (T32U)	N	20	38	_
2x3/2-way single solenoid, open/closed (T32H)	Н	20	38	_
2x3/2-way single solenoid, closed (T32N)	Q	34	28	-
2x3/2-way single solenoid, open (T32F)	Р	34	28	_
2x3/2-way single solenoid, open/closed (T32W)	R	34	28	-
2x2/2-way single solenoid, closed (T22C)	VC	20	38	-
2x2/2-way single solenoid, closed (T22CV)	VV	20	38	-

Characteristic coil data		
Valve function (with valve code)	Terminal code	Characteristic coil data in [W]
5/2-way double solenoid (B52)	J	1.6
5/2-way double solenoid with dominant signal (D52)	D	1.3
5/2-way single solenoid (M52A)	M	1.6
5/2-way single solenoid (M52M)	0	1.6
5/3-way closed (P53C)	G	1.6
5/3-way exhausted (P53E)	E	1.6
5/3-way pressurised (P53U)	В	1.6
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	1.6
2x3/2-way single solenoid, closed (T32C)	K	1.3
2x3/2-way single solenoid, open (T32U)	N	1.3
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3
2x3/2-way single solenoid, closed (T32N)	Q	1.3
2x3/2-way single solenoid, open (T32F)	P	1.3
2x3/2-way single solenoid, open/closed (T32W)	R	1.3
2x2/2-way single solenoid, closed (T22C)	VC	1.3
2x2/2-way single solenoid, closed (T22CV)	VV	1.3

Max. current consumption per solenoi	d coil			
Туре		T22, T32	B52, D52, M52, P53	
At nominal voltage 24 V DC (valves wit	th holding cur	rent reduction)		
Nominal pick-up current	[mA]	60	72	
Nominal current following current	[mA]	-	-	
reduction				
Time until current reduction	[ms]	30	30	·

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant RoHS-compliant

	Terminal	Valve function	Valve	Width	Part no.	Туре
	code		code			
olenoid valves	5					
	VC	2x 2/2-way valve, single solenoid,	T22C	42 mm	561340	VSVA-B-T22C-AZD-D1-1T1L
		normally closed,				
	•	pneumatic spring return				
	VV	2x 2/2-way valve, single solenoid,	T22CV	42 mm	561344	VSVA-B-T22CV-AZD-D1-1T
		normally closed,				
8		pneumatic spring return,				
		vacuum operation possible at 3 and 5				
	N	2x 3/2-way valve, single solenoid,	T32U	42 mm	543692	VSVA-B-T32U-AZD-D1-1T1
		normally open				
	K	2x 3/2-way valve, single solenoid,	T32C	42 mm	543690	VSVA-B-T32C-AZD-D1-1T1
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	42 mm	543694	VSVA-B-T32H-AZD-D1-1T1
		1x normally open, 1x normally closed				
	Р	2x 3/2-way valve, single solenoid,	T32F	42 mm	543693	VSVA-B-T32F-AZD-D1-1T1
		reverse operation,				
		normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	42 mm	543691	VSVA-B-T32N-AZD-D1-1T
		reverse operation,				
		Normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	42 mm	543695	VSVA-B-T32W-AZD-D1-1T
		reverse operation,				
		1x normally open, 1x normally closed				
	M	5/2-way valve, single solenoid,	M52-A	42 mm	543698	VSVA-B-M52-AZD-D1-1T1
		pneumatic spring return				
	0	5/2-way valve, single solenoid,	M52-M	42 mm	543699	VSVA-B-M52-MZD-D1-1T
		mechanical spring return		'		
	ı	5/2-way valve, double solenoid	B52	42 mm	543696	VSVA-B-B52-ZD-D1-1T1L
	ľ		-5-			
	D	5/2-way valve, double solenoid,	D52	42 mm	543697	VSVA-B-D52-ZD-D1-1T1L
	-	with dominant signal	-5-			
	В	5/3-way solenoid valve,	P53U	42 mm	543700	VSVA-B-P53U-ZD-D1-1T1
		mid-position pressurised	1.330	12	2 127 00	
	G	5/3-way solenoid valve,	P53C	42 mm	543702	VSVA-B-P53C-ZD-D1-1T1
	ľ	mid-position closed	1.350	72 000	343702	100000133025521111
	E	5/3-way solenoid valve,	P53E	42 mm	543701	VSVA-B-P53E-ZD-D1-1T1
	-	mid-position exhausted		72 111111	343701	
	VG	5/3-way solenoid valve,	P53F	42 mm	8000464	VSVA-B-P53F-ZD-D1-1T1I
	٧٥	mid-position pressurised 1 to 2, 4 to 5 closed	F53F	42 111111	8000464	*3*A-B-F 33F-ZU-D1-1111

		Valve function	Valve	Width	Part no.	Type
	code		code			
lenoid valves	5					
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034781	VSVA-B-T22C-AZTR-D1-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034782	VSVA-B-T22CV-AZTR-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034770	VSVA-B-T32U-AZTR-D1-1T1L
	К	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034768	VSVA-B-T32C-AZTR-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	8034772	VSVA-B-T32H-AZTR-D1-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034771	VSVA-B-T32F-AZTR-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	8034769	VSVA-B-T32N-AZTR-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034773	VSVA-B-T32W-AZTR-D1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	42 mm	8034776	VSVA-B-M52-AZTR-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034777	VSVA-B-M52-MZTR-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034774	VSVA-B-B52-ZTR-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034775	VSVA-B-D52-ZTR-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034778	VSVA-B-P53U-ZTR-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034780	VSVA-B-P53C-ZTR-D1-1T1L
	Е	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034779	VSVA-B-P53E-ZTR-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034783	VSVA-B-P53F-ZTR-D1-1T1L

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
noid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034812	VSVA-B-T22C-AZH-D1-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034813	VSVA-B-T22CV-AZH-D1-1T1I
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034801	VSVA-B-T32U-AZH-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034799	VSVA-B-T32C-AZH-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	8034803	VSVA-B-T32H-AZH-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034802	VSVA-B-T32F-AZH-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	8034800	VSVA-B-T32N-AZH-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034804	VSVA-B-T32W-AZH-D1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	42 mm	8034807	VSVA-B-M52-AZH-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034808	VSVA-B-M52-MZH-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034805	VSVA-B-B52-ZH-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034806	VSVA-B-D52-ZH-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034809	VSVA-B-P53U-ZH-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034811	VSVA-B-P53C-ZH-D1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034810	VSVA-B-P53E-ZH-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034814	VSVA-B-P53F-ZH-D1-1T1L

	Terminal	Valve function	Valve	Width	Part no.	Туре
	code		code			
enoid valves	s, 24 V DC					
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034843	VSVA-B-T22C-AZ-D1-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034844	VSVA-B-T22CV-AZ-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034832	VSVA-B-T32U-AZ-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034830	VSVA-B-T32C-AZ-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	8034834	VSVA-B-T32H-AZ-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034833	VSVA-B-T32F-AZ-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, Normally closed	T32N	42 mm	8034831	VSVA-B-T32N-AZ-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034835	VSVA-B-T32W-AZ-D1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	42 mm	8034838	VSVA-B-M52-AZ-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034839	VSVA-B-M52-MZ-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034836	VSVA-B-B52-Z-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034837	VSVA-B-D52-Z-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034840	VSVA-B-P53U-Z-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034842	VSVA-B-P53C-Z-D1-1T1L
	Е	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034841	VSVA-B-P53E-Z-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034845	VSVA-B-P53F-Z-D1-1T1L

Datasheet - Solenoid valve width 52 mm

Valve width to ISO 5599-2 52 mm (ISO 2)

Voltage 24 V DC

- N - Flow rate

Valve width 52 mm:

VTSA up to 2900 l/min

VTSA-F up to 2900 l/min

VTSA-F-CB up to 2900 l/min



Safety characteristics for va	Safety characteristics for valve							
Conforms to standard		EN 13849-1/2						
CE marking (see	Direct voltage	To EU EMC Directive 1)						
declaration of conformity)	24 V DC							
KC marking		KC EMC						
Shock resistance		Shock test with severity level 2, to EN 60068-2-27						
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6						

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety characteristics for valve Valve function (with valve code)	Terminal	Test pulses				
,	code	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]			
5/2-way double solenoid (B52)	J	1000	3500			
5/2-way double solenoid with dominant signal (D52)	D	1000	3500			
5/2-way single solenoid (M52A)	M	1000	3500			
5/2-way single solenoid (M52M)	0	1000	3500			
5/3-way closed (P53C)	G	1000	3500			
5/3-way exhausted (P53E)	E	1000	3500			
5/3-way pressurised (P53U)	В	1000	3500			
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	-	-			
2x3/2-way single solenoid, closed (T32C)	K	1000	3500			
2x3/2-way single solenoid, open (T32U)	N	1000	3500			
2x3/2-way single solenoid, open/closed (T32H)	Н	1000	3500			
2x3/2-way single solenoid, closed (T32N)	Q	1000	3500			
2x3/2-way single solenoid, open (T32F)	Р	1000	3500			
2x3/2-way single solenoid, open/closed (T32W)	R	1000	3500			
2x2/2-way single solenoid, closed (T22C)	VC	1000	3500			

Datasheet - Solenoid valve width52 mm

Datasheet for valve Valve function (with valve code)	Terminal	Flow direction	1		Reset method	ł	Weight
Tatte tallation (mail tatte code)	code	Any	Only reversible	Not reversible	Pneumatic spring	Mechanical spring	[g]
5/2-way double solenoid (B52)	J		-	_	-	_	732
5/2-way double solenoid with dominant signal (D52)	D	•	-	-	-	-	732
5/2-way single solenoid (M52A)	M		_	_	•	_	702
5/2-way single solenoid (M52M)	0		_	_	_	•	702
5/3-way closed1) (P53C)	G	•	_	_	_	•	780
5/3-way exhausted1) (P53E)	E	•	_	_	_	•	780
5/3-way pressurised1) (P53U)	В		_	_	-	•	780
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG		_	_	_	_	780
2x3/2-way single solenoid, closed (T32C)	K	_	_	•	•	_	740
2x3/2-way single solenoid, open (T32U)	N	_	_	•	•	_	740
2x3/2-way single solenoid, open/closed (T32H)	Н	_	_	•	•	_	740
2x3/2-way single solenoid, closed (T32N)	Q	-	•	_	•	_	740
2x3/2-way single solenoid, open (T32F)	Р	_	•	_	-	_	740
2x3/2-way single solenoid, open/closed (T32W)	R	_	•	_	-	_	740
2x2/2-way single solenoid, closed (T22C)	VC	-	_	•	•	_	740

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position

Valve function (with valve code)	Terminal	Flow rate	Valve on individual				
	code	Valve	Valve on valve	Valve on valve terminal			
			VTSA	VTSA-F	VTSA-F-CB	sub-base	
5/2-way double solenoid (B52)	J	4000	2900	2900	2900	3400	
5/2-way double solenoid with dominant signal (D52)	D	4000	2900	2900	2900	3400	
5/2-way single solenoid (M52A)	M	4000	2900	2900	2900	3400	
5/2-way single solenoid (M52M)	0	4000	2900	2900	2900	3400	
5/3-way closed (P53C)	G	3600 ¹⁾	2800 ¹⁾	2800 ¹⁾	2800 ¹⁾	3200 ¹⁾	
		1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	
5/3-way exhausted (P53E)	E	3600 ¹⁾	2800 ¹⁾	2800 ¹⁾	2800 ¹⁾	3200 ¹⁾	
		1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	
5/3-way pressurised (P53U)	В	3600 ¹⁾	2800 ¹⁾	2800 ¹⁾	2800 ¹⁾	3200 ¹⁾	
		1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	1700 ²⁾	
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	3000 ¹⁾	2300 ¹⁾	2300 ¹⁾	2300 ¹⁾	2600 ¹⁾	
		900 ²⁾	900 ²⁾	900 ²⁾	900 ²⁾	900 ²⁾	
2x3/2-way single solenoid, closed (T32C)	K	3000	2400	2400	2400	2600	
2x3/2-way single solenoid, open (T32U)	N	3000	2400	2400	2400	2600	
2x3/2-way single solenoid, open/closed (T32H)	Н	3000	2400	2400	2400	2600	
2x3/2-way single solenoid, closed (T32N)	Q	3000	2400	2400	2400	2600	
2x3/2-way single solenoid, open (T32F)	Р	3000	2400	2400	2400	2600	
2x3/2-way single solenoid, open/closed (T32W)	R	3000	2400	2400	2400	2600	
2x2/2-way single solenoid, closed (T22C)	VC	4000	2800	2800	2800	3400	

¹⁾ Switching position

²⁾ Mid-position

Datasheet – Solenoid valve width 52 mm

Valve switching times in [ms]				
Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	-	18
5/2-way double solenoid with dominant signal (D52)	D	-	-	18
5/2-way single solenoid (M52A)	M	40	45	_
5/2-way single solenoid (M52M)	0	20	60	-
5/3-way closed (P53C)	G	23	60	38
5/3-way exhausted (P53E)	E	23	60	38
5/3-way pressurised (P53U)	В	23	60	38
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	23	60	38
2x3/2-way single solenoid, closed (T32C)	K	20	35	-
2x3/2-way single solenoid, open (T32U)	N	20	35	_
2x3/2-way single solenoid, open/closed (T32H)	Н	20	35	-
2x3/2-way single solenoid, closed (T32N)	Q	20	35	_
2x3/2-way single solenoid, open (T32F)	Р	20	35	_
2x3/2-way single solenoid, open/closed (T32W)	R	20	35	-
2x2/2-way single solenoid, closed (T22C)	VC	14	35	_

Characteristic coil data		
Valve function (with valve code)	Terminal code	Characteristic coil data in [W]
5/2-way double solenoid (B52)	J	4.6
5/2-way double solenoid with dominant signal (D52)	D	4.6
5/2-way single solenoid (M52A)	M	4.6
5/2-way single solenoid (M52M)	0	4.6
5/3-way closed (P53C)	G	4.6
5/3-way exhausted (P53E)	E	4.6
5/3-way pressurised (P53U)	В	4.6
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	4.6
2x3/2-way single solenoid, closed (T32C)	K	4.6
2x3/2-way single solenoid, open (T32U)	N	4.6
2x3/2-way single solenoid, open/closed (T32H)	Н	4.6
2x3/2-way single solenoid, closed (T32N)	Q	4.6
2x3/2-way single solenoid, open (T32F)	Р	4.6
2x3/2-way single solenoid, open/closed (T32W)	R	4.6
2x2/2-way single solenoid, closed (T22C)	VC	4.6

Max. current consumption per solenoi	lax. current consumption per solenoid coil								
At nominal voltage 24 V DC (valves with holding current reduction)									
Nominal pick-up current	[mA]	165							
Nominal current following current	[mA]	35							
reduction									
Time until current reduction	[ms]	30							

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
oid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	52 mm	560831	VSVA-B-T22C-AZD-D2-1
	N	2x 3/2-way valve, single solenoid, normally open	T32U	52 mm	560827	VSVA-B-T32U-AZD-D2-1
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	52 mm	560825	VSVA-B-T32C-AZD-D2-1
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	Т32Н	52 mm	560829	VSVA-B-T32H-AZD-D2-1
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	52 mm	560828	VSVA-B-T32F-AZD-D2-1
	Q	2x 3/2-way valve, single solenoid, reverse operation, Normally closed	T32N	52 mm	560826	VSVA-B-T32N-AZD-D2-1
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	52 mm	560830	VSVA-B-T32W-AZD-D2-
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	52 mm	560820	VSVA-B-M52-AZD-D2-1
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	52 mm	560821	VSVA-B-M52-MZD-D2-1
	J	5/2-way valve, double solenoid	B52	52 mm	560818	VSVA-B-B52-ZD-D2-1T1
	D	5/2-way valve, double solenoid, with dominant signal	D52	52 mm	560819	VSVA-B-D52-ZD-D2-1T1
	В	5/3-way solenoid valve, mid-position pressurised	P53U	52 mm	560822	VSVA-B-P53U-ZD-D2-17
	G	5/3-way solenoid valve, mid-position closed	P53C	52 mm	560824	VSVA-B-P53C-ZD-D2-1T
	Е	5/3-way solenoid valve, mid-position exhausted	P53E	52 mm	560823	VSVA-B-P53E-ZD-D2-1T
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	52 mm	8000465	VSVA-B-P53F-ZD-D2-1T

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
enoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	52 mm	8034967	VSVA-B-T22C-AZTR-D2-1T
	N	2x 3/2-way valve, single solenoid, normally open	T32U	52 mm	8034963	VSVA-B-T32U-AZTR-D2-1
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	52 mm	8034961	VSVA-B-T32C-AZTR-D2-11
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	52 mm	8034965	VSVA-B-T32H-AZTR-D2-1
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	52 mm	8034964	VSVA-B-T32F-AZTR-D2-1T
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	52 mm	8034962	VSVA-B-T32N-AZTR-D2-1
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	52 mm	8034966	VSVA-B-T32W-AZTR-D2-1
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	52 mm	8034956	VSVA-B-M52-AZTR-D2-1T
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	52 mm	8034957	VSVA-B-M52-MZTR-D2-1
	J	5/2-way valve, double solenoid	B52	52 mm	8034954	VSVA-B-B52-ZTR-D2-1T1
	D	5/2-way valve, double solenoid, with dominant signal	D52	52 mm	8034955	VSVA-B-D52-ZTR-D2-1T1I
	В	5/3-way solenoid valve, mid-position pressurised	P53U	52 mm	8034958	VSVA-B-P53U-ZTR-D2-1T
	G	5/3-way solenoid valve, mid-position closed	P53C	52 mm	8034960	VSVA-B-P53C-ZTR-D2-1T1
	E	5/3-way solenoid valve, mid-position exhausted	P53E	52 mm	8034959	VSVA-B-P53E-ZTR-D2-1T1
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	52 mm	8034968	VSVA-B-P53F-ZTR-D2-1T1

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
oid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	52 mm	8034982	VSVA-B-T22C-AZH-D2-1T
	N	2x 3/2-way valve, single solenoid, normally open	T32U	52 mm	8034978	VSVA-B-T32U-AZH-D2-1T
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	52 mm	8034976	VSVA-B-T32C-AZH-D2-1T
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	52 mm	8034980	VSVA-B-T32H-AZH-D2-1T
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	52 mm	8034979	VSVA-B-T32F-AZH-D2-1T1
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	52 mm	8034977	VSVA-B-T32N-AZH-D2-1T
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	52 mm	8034981	VSVA-B-T32W-AZH-D2-1T
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	52 mm	8034971	VSVA-B-M52-AZH-D2-1T1
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	52 mm	8034972	VSVA-B-M52-MZH-D2-1T
	J	5/2-way valve, double solenoid	B52	52 mm	8034969	VSVA-B-B52-ZH-D2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	52 mm	8034970	VSVA-B-D52-ZH-D2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	52 mm	8034973	VSVA-B-P53U-ZH-D2-1T1
	G	5/3-way solenoid valve, mid-position closed	P53C	52 mm	8034975	VSVA-B-P53C-ZH-D2-1T1I
	E	5/3-way solenoid valve, mid-position exhausted	P53E	52 mm	8034974	VSVA-B-P53E-ZH-D2-1T1
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	52 mm	8034983	VSVA-B-P53F-ZH-D2-1T1I

	Terminal	Valve function	Valve	Width	Part no.	Туре
	code		code			
noid valves						
5000	VC	2x 2/2-way valve, single solenoid,	T22C	52 mm	8034997	VSVA-B-T22C-AZ-D2-1T1
	\geq	normally closed, pneumatic spring return				
	N	2x 3/2-way valve, single solenoid, normally open	T32U	52 mm	8034993	VSVA-B-T32U-AZ-D2-1T1
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	52 mm	8034991	VSVA-B-T32C-AZ-D2-1T1
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	52 mm	8034995	VSVA-B-T32H-AZ-D2-1T1
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	52 mm	8034994	VSVA-B-T32F-AZ-D2-1T1
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	52 mm	8034992	VSVA-B-T32N-AZ-D2-1T1
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	52 mm	8034996	VSVA-B-T32W-AZ-D2-1T
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	52 mm	8034986	VSVA-B-M52-AZ-D2-1T1
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	52 mm	8034987	VSVA-B-M52-MZ-D2-1T1
	J	5/2-way valve, double solenoid	B52	52 mm	8034984	VSVA-B-B52-Z-D2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	52 mm	8034985	VSVA-B-D52-Z-D2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	52 mm	8034988	VSVA-B-P53U-Z-D2-1T1I
	G	5/3-way solenoid valve, mid-position closed	P53C	52 mm	8034990	VSVA-B-P53C-Z-D2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	52 mm	8034989	VSVA-B-P53E-Z-D2-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	52 mm	8034998	VSVA-B-P53F-Z-D2-1T1L

Accessories – Pneumatic components

Ordering data – Ma	1	T. Control of the Con			1
	Code	Description	Width	Part no.	Туре
VTSA, port pattern	to ISO 154	07-2 and ISO 5599-2			
	А	2 valve positions, 4 addresses, for double solenoid valves	18 mm	539224	VABV-S4-2S-G18-2T2
	В	2 valve positions, 4 addresses, for double solenoid valves	26 mm	539220	VABV-S4-1S-G14-2T2
	YA	2 valve positions, 4 addresses, for double solenoid valves1)	18/26 mm	8068911	VABV-S4-12HS-G-CB-2T2
	С	1 valve position, 2 addresses, for double solenoid valves	42 mm	542458	VABV-S2-1S-G38-T2
	D	1 valve position, 2 addresses, for double solenoid valves	52 mm	560841	VABV-S2-2S-G12-T2
	E	2 valve positions, 2 addresses, for single solenoid valves	18 mm	539226	VABV-S4-2S-G18-2T1
	F	2 valve positions, 2 addresses, for single solenoid valves	26 mm	539222	VABV-S4-1S-G14-2T1
	G	1 valve position, 1 address, for single solenoid valves	42 mm	542459	VABV-S2-1S-G38-T1
	Н	1 valve position, 1 address, for single solenoid valves	52 mm	560842	VABV-S2-2S-G12-T1
TSA-F, optimised	for flow rat	te			
^	Α	2 valve positions, 4 addresses, for double solenoid valves	18 mm	546215	VABV-S4-2HS-G18-2T2
	В	2 valve positions, 4 addresses, for double solenoid valves	26 mm	546211	VABV-S4-1HS-G14-2T2
	XA	2 valve positions, 4 addresses, for double solenoid valves	18/26 mm	8190411	VABV-S4-12HS-G-2T2
5.00	С	1 valve position, 2 addresses, for double solenoid valves	42 mm	546219	VABV-S2-1HS-G38-T2
	D	1 valve position, 2 addresses, for double solenoid valves	52 mm	560841	VABV-S2-2S-G12-T2
•	E	2 valve positions, 2 addresses, for single solenoid valves	18 mm	546214	VABV-S4-2HS-G18-2T1
	F	2 valve positions, 2 addresses, for single solenoid valves	26 mm	546210	VABV-S4-1HS-G14-2T1
	G	1 valve position, 1 address, for single solenoid valves	42 mm	546218	VABV-S2-1HS-G38-T1
	Н	1 valve position, 1 address, for single solenoid valves	52 mm	560842	VABV-S2-2S-G12-T1
TSA-F-CB, with CE			140	00/2000	WARVEY AUG CAO CR ATA
	A	2 valve positions, 4 addresses, for double solenoid valves1)	18 mm	8067932	VABV-S4-2HS-G18-CB-2T2
	В	2 valve positions, 4 addresses, for double solenoid valves1)	26 mm	8067940	VABV-S4-1HS-G14-CB-2T2
	С	1 valve position, 2 addresses, for double solenoid valves1)	42 mm	8068154	VABV-S2-1HS-G38-CB-T2
	D	1 valve position, 2 addresses, for double solenoid valves1)	52 mm	8068146	VABV-S2-2S-G12-CB-T2
401	E	2 valve positions, 2 addresses, for single solenoid valves1)	18 mm	8067934	VABV-S4-2HS-G18-CB-2T1
	F	2 valve positions, 2 addresses, for single solenoid valves1)	26 mm	8067942	VABV-S4-1HS-G14-CB-2T1
	G	1 valve position, 1 address, for single solenoid valves1)	42 mm	8068156	VABV-S2-1HS-G38-CB-T1
	Н	1 valve position, 1 address, for single solenoid valves1)	52 mm	8068148	VABV-S2-2S-G12-CB-T1
TSA-F-CB, with CE	SUS loop-tl	hrough for pilot air switching valve			
	YB	2 valve positions, 2 addresses, for pilot air switching valve	18 mm	8068913	VABV-S4-2HS-G18-CB-2T5
		1 valve position, width 18 mm, with CBUS communication			
		1 valve position, width 18 mm, double solenoid			
200		Sensor evaluation: internal			
	YC	2 valve positions, 2 addresses, for pilot air switching valve	18/26 mm	8068912	VABV-S4-12HS-G-CB-2T5
1000		1 valve position, width 18 mm, with CBUS communication			
		1 valve position, width 26 mm, double solenoid			
		Sensor evaluation: internal			
TCA F CD!!!- CF	NIC 1 41	harvest for a fit start value			
isa-r-cb, with CE		hrough for soft-start valve		00/0/00	VARV CC 40 C20 CR4 TF
•	PV	With CBUS loop-through and new voltage zone Pressure sensor plug-in	41 mm	8068609	VABV-S6-1Q-G38-CB1-T5
		Sensor evaluation: internal			
		(Ports 2 and 4 are combined),			
		pneumatic connection G3/8, M5			
	PS	With CBUS loop-through in the same voltage zone	41 mm	8068610	VABV-S6-1Q-G38-CB-T5
		Pressure sensor plug-in			
		Sensor evaluation: internal			
		(Ports 2 and 4 are combined),			
		pneumatic connection G3/8, M5			

¹⁾ When using single solenoid valves on double solenoid sub-bases, one address will be lost!

Accessories – Pneumatic components

Jideiliig data – St	1	extension module		ı	1	1
	Code	Description		Width	Part no.	Туре
TSA/VTSA-F, sup	ply plate					
0	L	With exhaust plate, 3/5 common, G1/2			539231	VABF-S6-1-P1A7-G12
	К	With exhaust air cover, 3/5 separated (for dual-pressure operation), G1/2			539230	VABF-S6-1-P1A6-G12
TSA-F-CB. extens	sion module.	pneumatic and electric air supply plate				
	U	Additional air supply With exhaust plate, 3/5 common, G1/2		38 mm	8092506	VABF-S6-1-P1A7-G12-CB
	UW	Additional pneumatic and electrical supply With exhaust plate, 3/5 common, G1/2 Generation of 24 additional valve addresses (electrical supply is provided internally from Uval)			8104042	VABF-S6-1-P8A7-G12-CB
	USW	Additional pneumatic and electrical supply With exhaust plate, 3/5 common, G1/2 Generation of 24 additional valve addresses (electrical supply is provided from new (safe) voltage zone (internally from S2))			8104044	VABF-S6-1-P8A7-G12-CB1
	U	Additional air supply With exhaust air cover, 3/5 separated (fo	38 mm	8092502	VABF-S6-1-P1A6-G12-CB	
	UW	Additional pneumatic and electrical supp With exhaust air cover, 3/5 separated (fo G1/2 Generation of 24 additional valve addres (electrical supply is provided internally fro	38 mm	8104041	VABF-S6-1-P8A6-G12-CB	
	USW	Additional pneumatic and electrical supp With exhaust air cover, 3/5 separated (fo G1/2 Generation of 24 additional valve addres: (electrical supply is provided from new (s (internally from S2))	38 mm	8104043	VABF-S6-1-P8A6-G12-CB1	
ngled connection	n plate for V1	SA/VTSA-F				
	P	· · · · · · · · · · · · · · · · · · ·	ecting thread G1/8	18 mm	539719	VABF-S4-2-A2G2-G18
8			ecting thread G1/4	26 mm	539721	VABF-S4-1-A2G2-G14
			ecting thread G3/8	42 mm	546097	VABF-S2-1-A1G2-G38
	< I		<u> </u>			

Accessories – Pneumatic components

Ordering data – Vert	ical stacki	ing					
	Code	Description			Width	Part no.	Туре
Vertical supply plate							
	ZU	Individual compressed air	npressed air Connecting thread G1/8		18 mm	540173	VABF-S4-2-P1A3-G18
		supply, duct 1	Connecting thread G1/4		26 mm	540171	VABF-S4-1-P1A3-G14
			Connecting thread G3/8		42 mm	546093	VABF-S2-1-P1A3-G38
			Connecting th	read G1/2	52 mm	555786	VABF-S2-2-P1A3-G12
	ZV	Individual compressed air	Connecting thread G1/8		18 mm	8000693	VABF-S4-2-P1A14-G18
		supply, ducts 1 and 14	Connecting thread G1/4		26 mm	8000689	VABF-S4-1-P1A14-G14
			Connecting thread G3/8		42 mm	8000536	VABF-S2-1-P1A14-G38
Č.			Connecting th	read G1/2	52 mm	8000549	VABF-S2-2-P1A14-G12
Vortical cumply plate	for valvos	with central plug, VTSA-F-CB					
refrical supply plate	ZU	Individual compressed air	Connecting th	uroad G1/8	18 mm	544435	VABF-S3-2-P1A3-G18
	20	supply, duct 1	Connecting thread G1/8		26 mm	544434	VABF-S3-1-P1A3-G14
		Supply, duct 1	Connecting thread G1/4 Connecting thread G3/8		42 mm	549100	VABF-S1-1-P1A3-G38
			Connecting th	iread G1/2	52 mm	555785	VABF-S1-2-P1A3-G12
Ordering data – Vert	1	Ĭ.	1		1	1	1
	Code	Pressure regulation for port	Control range		Width	Part no.	Туре
			[bar]	[MPa]			
egulator plate, widt	h 18 mm						
®	ZA	1	0.5 8.5	0.05 0.85	18 mm	540153	VABF-S4-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	18 mm	540151	VABF-S4-2-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	18 mm	540161	VABF-S4-2-R2C2-C-10
	ZH	2	2 6	0.2 0.6	18 mm	540159	VABF-S4-2-R2C2-C-6
	ZB	4	2 8.5	0.2 0.85	18 mm	540157	VABF-S4-2-R3C2-C-10
	ZG	4	2 6	0.20.6	18 mm	540155	VABF-S4-2-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	18 mm	540165	VABF-S4-2-R4C2-C-10
	ZI	2 and 4	2 6	0.2 0.6	18 mm	540163	VABF-S4-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	18 mm	540169	VABF-S4-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	18 mm	540167	VABF-S4-2-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	18 mm	546252	VABF-S4-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	18 mm	546248	VABF-S4-2-R6C2-C-6
	ZK	4. reversible	0.5 8.5	0.05 0.85	18 mm	546254	VABF-S4-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	18 mm	546250	VABF-S4-2-R7C2-C-6
	1	1	1				
Regulator plate, widt		Τ.	1	T	1		
	ZA	1	0.5 8.5	0.05 0.85	26 mm	540154	VABF-S4-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	26 mm	540152	VABF-S4-1-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	26 mm	540162	VABF-S4-1-R2C2-C-10
	ZH	2	2 6	0.20.6	26 mm	540160	VABF-S4-1-R2C2-C-6
	ZB	4	2 8.5	0.2 0.85	26 mm	540158	VABF-S4-1-R3C2-C-10
	ZG	4	2 6	0.20.6	26 mm	540156	VABF-S4-1-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	26 mm	540166	VABF-S4-1-R4C2-C-10
	ZI	2 and 4	2 6	0.20.6	26 mm	540164	VABF-S4-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	26 mm	540170	VABF-S4-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	26 mm	540168	VABF-S4-1-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	26 mm	546251	VABF-S4-1-R6C2-C-10
			0.5	0.05 0.6	26 mm	546247	VABF-S4-1-R6C2-C-6
	ZN	2, reversible	0.5 6	0.05 0.6	26 mm	340247	VADI 34 I ROCE CO
	ZN ZK	2, reversible 4, reversible	0.5 6	0.05 0.85	26 mm	546253	VABF-S4-1-R7C2-C-10

	Code	Pressure regulation for port	Control range		Width	Part no.	Туре
			[bar]	[MPa]			
Regulator plate, width	42 mm						
.0	ZA	1	0.5 8.5	0.05 0.85	42 mm	546084	VABF-S2-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	42 mm	546083	VABF-S2-1-R1C2-C-6
	ZC	2	1.0 10	0.1 1	42 mm	546088	VABF-S2-1-R2C2-C-10
	ZH	2	1.0 6	0.1 0.6	42 mm	546087	VABF-S2-1-R2C2-C-6
	ZB	4	1.0 10	0.1 1	42 mm	546086	VABF-S2-1-R3C2-C-10
Z Son	ZG	4	0.5 6	0.05 0.6	42 mm	546085	VABF-S2-1-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	42 mm	546090	VABF-S2-1-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	42 mm	546089	VABF-S2-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	42 mm	546092	VABF-S2-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	42 mm	546091	VABF-S2-1-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	42 mm	546832	VABF-S2-1-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	42 mm	546831	VABF-S2-1-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	42 mm	546834	VABF-S2-1-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	42 mm	546833	VABF-S2-1-R7C2-C-6
egulator plate, width	52 mm						
	ZA	1	0.5 10	0.05 1	52 mm	555772	VABF-S2-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	52 mm	555771	VABF-S2-2-R1C2-C-6
	ZC	2	1.0 10	0.1 1	52 mm	555774	VABF-S2-2-R2C2-C-10
	ZH	2	1.0 6	0.1 0.6	52 mm	555773	VABF-S2-2-R2C2-C-6
	ZB	4	1.0 10	0.1 1	52 mm	555776	VABF-S2-2-R3C2-C-10
Z Septe	ZG	4	1.0 6	0.1 0.6	52 mm	555775	VABF-S2-2-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	52 mm	555778	VABF-S2-2-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	52 mm	555777	VABF-S2-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	52 mm	555780	VABF-S2-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	52 mm	555779	VABF-S2-2-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	52 mm	555782	VABF-S2-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	52 mm	555781	VABF-S2-2-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	52 mm	555784	VABF-S2-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	52 mm	555783	VABF-S2-2-R7C2-C-6

Ordering data – Verti	1	T .	1		1	1	1
	Code	Pressure regulation for port	Control range		Width	Part no.	Туре
			[bar]	[MPa]			
Regulator plate for va	lves with	symmetrical design, width 18 mm					
	ZAY	1	0.5 8.5	0.05 0.85	18 mm	560756	VABF-S4-2-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	18 mm	560758	VABF-S4-2-R1C2-C-6E
	ZCY	2	2 8.5	0.2 0.85	18 mm	560763	VABF-S4-2-R2C2-C-10E
	ZHY	2	2 6	0.2 0.6	18 mm	560765	VABF-S4-2-R2C2-C-6E
	ZDY	2 and 4	2 8.5	0.2 0.85	18 mm	560767	VABF-S4-2-R4C2-C-10E
→	ZIY	2 and 4	2 6	0.2 0.6	18 mm	560769	VABF-S4-2-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 8.5	0.05 0.85	18 mm	560771	VABF-S4-2-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	18 mm	560773	VABF-S4-2-R5C2-C-6E
	ZLY	2, reversible	0.5 8.5	0.05 0.85	18 mm	560775	VABF-S4-2-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	18 mm	560777	VABF-S4-2-R6C2-C-6E
Regulator plate for va	lves with s	symmetrical design, width 26 mm					
•	ZAY	1	0.5 8.5	0.05 0.85	26 mm	560757	VABF-S4-1-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	26 mm	549876	VABF-S4-1-R1C2-C-6E
The contract of the contract o	ZCY	2	2 8.5	0.2 0.85	26 mm	560764	VABF-S4-1-R2C2-C-10E
	ZHY	2	2 6	0.2 0.6	26 mm	560766	VABF-S4-1-R2C2-C-6E
	ZDY	2 and 4	2 8.5	0.2 0.85	26 mm	560768	VABF-S4-1-R4C2-C-10E
	ZIY	2 and 4	2 6	0.2 0.6	26 mm	560770	VABF-S4-1-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 8.5	0.05 0.85	26 mm	560772	VABF-S4-1-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	26 mm	560774	VABF-S4-1-R5C2-C-6E
	ZLY	2, reversible	0.5 8.5	0.05 0.85	26 mm	560776	VABF-S4-1-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	26 mm	560778	VABF-S4-1-R6C2-C-6E
Pogulator plato for va	lyos with	symmetrical design, width 42 mm	1)				
Regulator plate for va	ZAY	1	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R1C2-C-10E
eti	ZFY	1	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R1C2-C-10E
	ZCY	2	0.5 10	0.05 0.6	42 mm	_	VABF-S2-1-R1C2-C-0E VABF-S2-1-R2C2-C-10E
	ZHY	2	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R2C2-C-10E
	ZBY	4	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R2C2-C-0E
	ZGY	4	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R3C2-C-6E
	ZDY	2 and 4	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R4C2-C-10E
	ZIY	2 and 4	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R5C2-C-6E
	ZLY	2, reversible	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R6C2-C-6E
	ZKY	4, reversible	0.5 10	0.05 1	42 mm	_	VABF-S2-1-R7C2-C-10E
	ZMY	4, reversible	0.5 6	0.05 0.6	42 mm	_	VABF-S2-1-R7C2-C-6E
					1		
Regulator plate for va	_	symmetrical design, width 52 mm	_	T	1		I
	ZAY	1	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R1C2-C-6E
	ZCY	2	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R2C2-C-10E
	ZHY	2	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R2C2-C-6E
	ZBY	4	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R3C2-C-10E
~	ZGY	4	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R3C2-C-6E
	ZDY	2 and 4	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R4C2-C-10E
	ZIY	2 and 4	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R5C2-C-6E
	ZLY	2, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R6C2-C-6E
	ZKY	4, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R7C2-C-10E
	ZMY	4, reversible	0.5 6	0.05 0.6	52 mm	_	VABF-S2-2-R7C2-C-6E

¹⁾ These functions are only available via the pressure regulator configurator VABF-S2 for width 42 mm and 52 mm only (ISO 5599-2, ISO 1 and ISO 2)

	Code	ing for valves with central plug, V Pressure regulation for port	Control range		Width	Part no.	Туре
	Code	Tressure regulation for port	[bar]	[MPa]	- Widen	T dit iio.	Type
gulator plate, widt	h 18 mm				<u> </u>		
× 6	ZA	1	0.5 8.5	0.05 0.85	18 mm	543526	VABF-S3-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	18 mm	543524	VABF-S3-2-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	18 mm	543534	VABF-S3-2-R2C2-C-10
	ZH	2	2 6	0.2 0.6	18 mm	543532	VABF-S3-2-R2C2-C-6
	ZB	4	2 8.5	0.2 0.85	18 mm	543530	VABF-S3-2-R3C2-C-10
	ZG	4	2 6	0.2 0.6	18 mm	543528	VABF-S3-2-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	18 mm	543538	VABF-S3-2-R4C2-C-10
	ZI	2 and 4	2 6	0.2 0.6	18 mm	543536	VABF-S3-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	18 mm	543542	VABF-S3-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	18 mm	543540	VABF-S3-2-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	18 mm	546788	VABF-S3-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	18 mm	546786	VABF-S3-2-R6C2-C-6
	ZK	4, reversible	0.5 8.5	0.05 0.85	18 mm	546792	VABF-S3-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	18 mm	546790	VABF-S3-2-R7C2-C-6
				1			
gulator plate, widt		14	0.5 8.5	0.05 0.05	26	F/2F27	VADE C2 4 D4C2 C 40
	ZA	1		0.05 0.85	26 mm	543527	VABF-S3-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	26 mm	543525	VABF-S3-1-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	26 mm	543535	VABF-S3-1-R2C2-C-10
	ZH	2	2 6	0.2 0.6	26 mm	543533	VABF-S3-1-R2C2-C-6
	ZB	4	2 8.5	0.2 0.85	26 mm	543531	VABF-S3-1-R3C2-C-10
	ZG	4	2 6	0.2 0.6	26 mm	543529	VABF-S3-1-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	26 mm	543539	VABF-S3-1-R4C2-C-10
	ZI	2 and 4	26	0.2 0.6	26 mm	543537	VABF-S3-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	26 mm	543543	VABF-S3-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	26 mm	543541	VABF-S3-1-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	26 mm	546789	VABF-S3-1-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	26 mm	546787	VABF-S3-1-R6C2-C-6
	ZK	4, reversible	0.5 8.5	0.05 0.85	26 mm	546793	VABF-S3-1-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	26 mm	546791	VABF-S3-1-R7C2-C-6
gulator plate, widt	h 42 mm						
^	ZA	1	0.5 10	0.05 1	42 mm	546818	VABF-S1-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	42 mm	546817	VABF-S1-1-R1C2-C-6
	ZC	2	1.0 10	0.1 1	42 mm	546822	VABF-S1-1-R2C2-C-10
), ZH	2	1.0 6	0.1 0.6	42 mm	546821	VABF-S1-1-R2C2-C-6
	ZB	4	1.0 10	0.1 1	42 mm	546820	VABF-S1-1-R3C2-C-10
~	ZG	4	0.5 6	0.05 0.6	42 mm	546819	VABF-S1-1-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	42 mm	546824	VABF-S1-1-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	42 mm	546823	VABF-S1-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	42 mm	546826	VABF-S1-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	42 mm	546825	VABF-S1-1-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	42 mm	546828	VABF-S1-1-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	42 mm	546827	VABF-S1-1-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	42 mm	546830	VABF-S1-1-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	42 mm	546829	VABF-S1-1-R7C2-C-6

Ordering data – Vertic	cal stacki	ng for valves with central plug, V	TSA-F-CB				
	Code	Pressure regulation for port	Control range		Width	Part no.	Туре
			[bar]	[MPa]			
Regulator plate, width	1 52 mm						
	ZA	1	0.5 10	0.05 1	52 mm	555758	VABF-S1-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	52 mm	555757	VABF-S1-2-R1C2-C-6
	ZC	2	1.0 10	0.1 1	52 mm	555760	VABF-S1-2-R2C2-C-10
	ZH	2	1.0 6	0.1 0.6	52 mm	555759	VABF-S1-2-R2C2-C-6
	ZB	4	1.0 10	0.1 1	52 mm	555762	VABF-S1-2-R3C2-C-10
	ZG	4	1.0 6	0.1 0.6	52 mm	555761	VABF-S1-2-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	52 mm	555764	VABF-S1-2-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	52 mm	555763	VABF-S1-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	52 mm	555766	VABF-S1-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	52 mm	555765	VABF-S1-2-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	52 mm	555768	VABF-S1-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	52 mm	555767	VABF-S1-2-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	52 mm	555770	VABF-S1-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	52 mm	555769	VABF-S1-2-R7C2-C-6

	Code	Description		Width	Part no.	Туре
ssure gauge						
>	Т	With cartridge connection	scale in bar/psi,	18 mm	543487	PAGN-26-16-P10
		for regulator, 10 bar	display range 016 bar/0240 psi,	26 mm		
			for regulator plate code ZA, ZB, ZC,	42 mm	548010	PAGN-40-16-P10
			ZD, ZE, ZK, ZL	52 mm		
	U	With cartridge connection	scale in bar/psi,	18 mm	543488	PAGN-26-10-P10
		for regulator, 6 bar,	display range 010 bar/0145 psi,	26 mm		
			for regulator plate code ZF, ZG, ZH,	42 mm	548009	PAGN-40-10-P10
			ZI, ZJ, ZM, ZN	52 mm		
	WT	With cartridge connection	Scale in MPa,	18 mm	563735	PAGN-26-1.6M-P10
		for regulator, 10 bar	display range	26 mm		
			016 bar/01.6 MPa,	42 mm	563737	PAGN-40-1.6M-P10
			for regulator plate code ZA, ZB, ZC, ZD, ZE, ZK, ZL	52 mm		
	WU	With cartridge connection	Scale in MPa,	18 mm	563736	PAGN-26-1M-P10
		for regulator, 6 bar	display range 016 bar/01 MPa	26 mm		
			for regulator plate code ZF, ZG, ZH,	42 mm	563738	PAGN-40-1M-P10
			ZI, ZJ, ZM, ZN	52 mm		
	VT	With cartridge connection	Scale in psi/bar,	18 mm	563731	PAGN-26-232P-P10
		for regulator, 10 bar	display range 016 bar/0232 psi	26 mm		
			for regulator plate code ZA, ZB, ZC,	42 mm	563733	PAGN-40-232P-P10
			ZD, ZE, ZK, ZL	52 mm		
	PS	With cartridge connection	Scale in psi/bar,	18 mm	563732	PAGN-26-145P-P10
		for regulator, 6 bar	display range 010 bar/0145 psi	26 mm		
			for regulator plate code ZF, ZG, ZH,	42 mm	563734	PAGN-40-145P-P10
			ZI, ZJ, ZM, ZN	52 mm		
	SGR	Red-green scale, with	Scale in bar,	18 mm	8090378	PAGN-26-10-P10-RG
		cartridge connection for regulator, 6 bar	display range 010 bar	26 mm		

Ordering data – Vertica	al stackin Code	g Description		Part no.	Туре
Cartridge for regulator			:	T dit iioi	
Caltridge for regulator	<u> </u>	For tubing O.D. 4 mm	1 piece	172972	QSP10-4
	_	Adapter for pressure gauge (allows products with threaded connection G1/8 to be attached to the cartridge connection)	Pack of 6	565811	QSP10-G1/8
Throttle plate					-
e ⁸	Х	Controls the flow of exhaust air downstream of the valve to ducts 3	18 mm	540176	VABF-S4-2-F1B1-C
· '		and 5	26 mm	540175	VABF-S4-1-F1B1-C
			42 mm 52 mm	546095 555789	VABF-S2-1-F1B1-C VABF-S2-2-F1B1-C
CONTRACTOR OF THE PARTY OF THE					
Throttle plate for valve	s with cer	ntral plug, VTSA-F-CB			
	Х	For port pattern to ISO 15407-2 and ISO 5599-2,	18 mm	543603	VABF-S3-2-F1B1-C
		Controls the flow of exhaust air downstream of the valve to ducts 3	26 mm	543604	VABF-S3-1-F1B1-C
		and 5	42 mm	549102	VABF-S1-1-F1B1-C
			52 mm	555788	VABF-S1-2-F1B1-C
Vertical pressure shut-	off plate				
	ZT	3/2-way valve for shutting off the operating pressure at the valve	18 mm	542884	VABF-S4-2-L1D1-C
		position	26 mm	542885	VABF-S4-1-L1D1-C
		Pressure separation can be shut off on the valve assembly	42 mm	546096	VABF-S2-1-L1D1-C
			52 mm	555791	VABF-S2-2-L1D1-C
	ZS	3/2-way valve for shutting off the operating pressure at the valve	18 mm	8001178	VABF-S4-2-L1D2-C
		position Pressure separation can be shut off on the valve assembly using a key	26 mm	8001179	VABF-S4-1-L1D2-C
Vertical pressure shut-	off plate f	or valves with central plug, VTSA-F-CB			
Content pressure shut-	ZT	3/2-way valve for shutting off the operating pressure at the valve	18 mm	543601	VABF-S3-2-L1D1-C
		position	26 mm	543602	VABF-S3-1-L1D1-C
		Pressure separation can be shut off on the valve assembly	42 mm	549103	VABF-S1-1-L1D1-C
			52 mm	555790	VABF-S1-2-L1D1-C
Covering					
	L	Blanking plate for vacant position	18 mm	539213	VABB-S4-2-WT
			26 mm	539212	VABB-S4-1-WT
			42 mm	543186	VABB-S2-1-WT
			52 mm	560845	VABB-S2-2-WT
9	_	Sealing cap for electrical links (with individual connection), size 18 mm and 26 mm	Pack of 10	547713	VABD-S4-E-C
	-	Seal (with individual connection), width 42 mm and 52 mm	2 pieces	571343	VABD-S2-1-S-C

Valve terminals VTSA

Ordering data – Acce	essories for valves with central plug, VTSA-F-CB			
	Description		Part no.	Туре
	Cover plate to seal spare or vacant valve positions	18 mm	161114	NDV-02-VDMA
		26 mm	161107	NDV-01-VDMA
9	Sealing cap for electrical links (with individual connection), size 18 mm and 26 mm	Pack of 10	547713	VABD-S4-E-C
	Seal (with individual connection), width 42 mm and 52 mm	2 pieces	571343	VABD-S2-1-S-C

Accessories – Electrical components

Ordering data						
	Code	Description		Width	Part no.	Туре
Multi-pin node for V						
	T	Terminal strip, 36-pin	Note	_	543412	VABE-S6-1LF-C-M1-C36M
	MP1	545 5 p(45, 57 p		-	543414	VABE-S6-1LT-C-M1-S37
	MP4		pin node supplied without	-	543415	VABE-S6-1LF-C-M1-R19
			Please order appropriate			
		cover	with cable separately.			
Individual electrical	connection	n for VTSA/VTSA-F				
	MP2	Multi-pin node with individual co		_	549046	VABE-S6-LT-C-S6-R5
	MP3	Multi-pin node with individual co	nnection M12, 10-way	_	549047	VABE-S6-LT-C-S10-R5
0						
*						
	-	Cover for individual connection N		-	549048	VAEM-S6-C-S6-R5
	-	Cover for individual connection N	112, 10-way	_	549049	VAEM-S6-C-S10-R5
	5 V/TCA //	TCA F				
Pneumatic interface	IOF VISA/\	For electrical terminal CPX in poly	rmer	T_	543416	VABA-S6-1-X1
(°, 8)	_	For electrical terminal CPX in poly		_	550663	VABA-S6-1-X1
	_	For electrical terminal CPX in met		_	573613	VABA-S6-1-X2-D
		with changed diagnostic function				
		For electrical terminal CPX-AP			8152356	VABA-S6-1-AP
	-	For electrical terminal CFA-AF		_	8152556	VADA-30-1-AF
Pneumatic interface	for VTSA-F	-CB	,			
60.00	RA	For electrical terminal CPX in poly		-	8082877	VABA-S6-1-X1-CB
			ircuit and undervoltage of valves,			
		wire break per solenoid coil)			22222	WARA CC 4 VO CD
		For electrical terminal CPX in met Integrated diagnostics (short of	aı ircuit and undervoltage of valves,	-	8082876	VABA-S6-1-X2-CB
		wire break per solenoid coil)	mant and andervoltage or varies,			
	RD	For electrical terminal CPX (interf	ace for PROFIsafe only) in metal	-	8068241	VABA-S6-1-X2-F2-CB
		with				
		2 safe voltage zones and1 safe output (connection: M1)	2)			
			ircuit and undervoltage of valves,			
		wire break per solenoid coil)	· ·			
	RC	For electrical terminal CPX (interf	ace for PROFIsafe only) in metal	-	8068240	VABA-S6-1-X2-F1-CB
		with3 safe voltage zones				
		_	ircuit and undervoltage of valves,			
		wire break per solenoid coil)				
	RB	For electrical terminal CPX (interf	ace for fieldbus only) in notice		0000070	VADA CA 1 V1 3V CD
	מא	With 3 voltage zones	ace for frequency offly) iff polyffler	-	8082879	VABA-S6-1-X1-3V-CB
		With external power supply 3x	M12			
			ircuit and undervoltage of valves,			
		wire break per solenoid coil)				
	RB	For electrical terminal CPX (interf	ace for fieldbus only) in metal	_	8082878	VABA-S6-1-X2-3V-CB
		With 3 voltage zonesWith external power supply 3xi	M12			
			ircuit and undervoltage of valves,			
		wire break per solenoid coil)				

Accessories – Electrical components

Ordering data				
	Code	Description	Part no.	Туре
ectrical interface I	O-Link [®]			
		IO-Link® interface for 16 valve positions	8152353	VABA-S6-1-PT
neumatic interface	for VTSA-F	-CR		I
	ХВ	Pneumatic interface, for expansion by 3 external power supplies for the zones	8152438	VABA-S6-1-X2-3V-CB-AL
	XC	Pneumatic interface for extending by 3 safe internal zones (PROFIsafe)	8152437	VABA-S6-1-X2-F1-CB-AL
	XD	Pneumatic interface for extending by 2 safe internal zones + 1 safe output (PROFIsafe)	8152436	VABA-S6-1-X2-F2-CB-AL
	PC	Pneumatic interface with additional power supply for extending by 3 safe internal zones (PROFIsafe)	8152435	VABA-S6-1-X2-F1-CB2-AL
	PD	Pneumatic interface with additional power supply for extending by 2 safe internal zones + 1 safe output (PROFIsafe)	8152434	VABA-S6-1-X2-F2-CB2-AL
lectrical interface f	or AS-Inter	face for VTSA/VTSA-F		
	_	4 inputs/4 outputs	549042	VABE-S6-1LF-C-A4-E
	-	8 inputs/8 outputs	549043	VABE-S6-1LF-C-A8-E
S-Interface module	e for VTSA/	VTSA-F		
	<u> </u>	4 inputs/4 outputs	549044	VAEM-S6-S-FAS-4-4E
	-	8 inputs/8 outputs	549045	VAEM-S6-S-FAS-8-8E
onnection block fo	r AS-Interfa	ace for VTSA/VTSA-F		
	Х	4x M12, 5-pin, double, socket	195704	CPX-AB-4-M12x2-5POL
	GW	4x M12, 5-pin, socket, metal thread	541254	CPX-AB-4-M12x2-5POL-R
	R	8x M8, 3-pin, socket	195706	CPX-AB-8-M8-3POL
	, l	8x spring-loaded terminal, Cage Clamp, 4-pin	195708	CPX-AB-8-KL-4POL
-	В	Sub-D, 25-pin, socket	525676	CPX-AB-1-SUB-BU-25POL

Accessories – Electrical components

Ordering data				
	Description		Part no.	Туре
Connecting cable for e	electrical connection of individual valves with central plug, VSTA-F-CB			
OF MARKET	Straight socket, M12x1, 5-pin Open end, 4-core	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	 Straight socket, M8x1, 3-pin Straight plug M12x1, 3-pin With 2x inscription label holders 	0.5 m	8078278	NEBA-M8G3-U-0.5-N-M12G3

Ordering data			
	Description	Part no.	Туре
Bus node with I-Port in	nterface, for electrical interface IO-Link®		
@ .	PROFIBUS bus node	570040	CTEU-PB
	EtherCAT® bus node	572556	CTEU-EC
	EtherNet/IP bus node	2798071	CTEU-EP
	PROFINET RT bus node	2201471	CTEU-PN

Accessories – General

	Code	Description		Part no.	Туре
connecting cable, Si	ıb-D (TPE-	U(PUR), IP65)			
	GA	Connecting cable for max. 8 solenoid coils, 10-core	2.5 m	539240	NEBV-S1W37-E-2.5-LE10
	GB		5 m	539241	NEBV-S1W37-E-5-LE10
	GC		10 m	539242	NEBV-S1W37-E-10-LE10
	GD	Connecting cable for max. 22 solenoid coils, 26-core	2.5 m	539243	NEBV-S1W37-E-2.5-LE26
	GE		5 m	539244	NEBV-S1W37-E-5-LE26
	GF		10 m	539245	NEBV-S1W37-E-10-LE26
	GG	Connecting cable for max. 32 solenoid coils, 37-core	2.5 m	539246	NEBV-S1W37-K-2.5-LE37
	GH		5 m	539247	NEBV-S1W37-K-5-LE37
	GI		10 m	539248	NEBV-S1W37-K-10-LE37
onnecting cable, Si	ıh-D (PVC	IP65)			
	GK	Connecting cable for max. 8 solenoid coils, 10-core	2.5 m	543271	NEBV-S1W37-KM-2.5-LE10
	GL		5 m	543272	
	GM		10 m	543273	
	GN	Connecting cable for max. 23 solenoid coils, 27-core	2.5 m	543274	
V V	GO		5 m	543275	
	GP		10 m	543276	
	GQ	Connecting cable for max. 32 solenoid coils, 37-core	2.5 m	543277	
	GR		5 m	543278	NEBV-S1W37-KM-5-LE37
	GS		10 m	543279	NEBV-S1W37-KM-10-LE37
over for multi-pin p	lug for V/T	SA NATSA E			
Over for matti-pin p	_	For configuration by the user		545974	NECV-S1W37
		Tor comiguration by the user		343774	NECV 31W37
	1				
ordering data – End	nlatos				
ordering data – End	i l	Description		Part no	Type
	Code	Description		Part no.	Туре
	Code	on			
	Code	on With supply air/exhaust air, internal pilot air supply, G1/2		Part no. 539234	Type VABE-S6-1R-G12
Ordering data – End	Code	on			
	Code	on With supply air/exhaust air, internal pilot air supply, G1/2			
	Code	on With supply air/exhaust air, internal pilot air supply, G1/2			
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14)		539234	VABE-S6-1R-G12
	Code	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4			
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14)		539234	VABE-S6-1R-G12
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4		539234	VABE-S6-1R-G12
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4		539234	VABE-S6-1R-G12
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4 (port 14 is sealed with a blanking plug)		539234	VABE-S6-1R-G12
	Code d connecti	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4		539234	VABE-S6-1R-G12
	Code d connecti V	With supply air/exhaust air, internal pilot air supply, G1/2 (no port 14) With supply air/exhaust air, internal pilot air supply, G3/4 (port 14 is sealed with a blanking plug)		539234	VABE-S6-1R-G12 VABE-S6-2R-G34

With pilot air selector



ctor				
	Y ¹⁾	Internal pilot air supply	539238	VABE-S6-1RZ-G-B1
	U ¹⁾	Internal pilot air supply, ducted pilot exhaust air		
	Z ¹⁾	External pilot air supply		
	W ¹⁾	External pilot air supply, ducted pilot exhaust air		

560839

VABE-S6-2RZ-G34

Х1

With supply air/exhaust air, external pilot air supply, G3/4

¹⁾ Code letter within the order code for a valve terminal configuration

Accessories – General

Ordering data – Dud	Code	Description	Weight	Part no.	Туре
	S	Duct separation 1, 3, 5	57 g	539228	VABD-S6-1-P3-C
	Т	Duct separation 1	43 g	539227	VABD-S6-1-P1-C
	R	Duct separation 3, 5	54 g	539229	VABD-S6-1-P2-C
	L	Seal between sub-bases, duct 1, 3, 5 open, port 14 blocked (colour coding: white)	40 g	573191	VABD-S6-1-P7-C
	TL	Seal between sub-bases, duct 1 blocked, port 14 blocked (colour coding: red) Note: additional pilot air supply required	43 g	8060483	VABD-S6-1-P8-C
	K	Seal between sub-bases, duct 1, 3, 5 blocked, port 14 blocked (colour coding: green)	57 g	8034612	VABD-S6-1-P6-C

Ordering data						
	Code	Description	Part no.	Туре		
Cover caps						
	N	Cover cap for manual override, non-detenting	Pack of 10	541010	VAMC-S6-CH	
	V	Cover cap for manual override, concealed	Pack of 10	541011	VAMC-S6-CS	
	A	Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only)	Pack of 10	4105147	VAMC-B-S6-CTR	
Accessories for manu	al overrid	le, heavy duty				
	-	Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR)	1 piece	1662543	AHB-MEB-B	




There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.


Accessories – General


Ordering data	Code	Description		Part no.	Туре
nscription label hol	ders/inscri	ption labels		_	
	В	Clip-on inscription label holder for valve cap	5 pieces	540888	ASCF-T-S6
	BZ	Clip-on inscription label holder for valve cap with additional text fields (electrical and pneumatic zone separation)	4 pieces	8106532	ASCF-T-S6-Z
	Т	Inscription label holder for manifold blocks/manifold sub-bases VTSA/VTSA-F	5 pieces	540889	ASCF-M-S6
	TD	Inscription label holder for manifold blocks/manifold sub-bases VTSA/VTSA-F, size 52 mm	5 pieces	562577	ASCF-M-S2-2
	-	Identification clip for manifold blocks/manifold sub-bases VTSA-F-CB (code A, B, C, E, F, G, PV, PS)	-	8110689	ASCF-M-S6-1
	-	Inscription label for ISO 15407 valves with individual electrical connection (20 labels in frames)	20 pieces	18182	IBS-9x20
	-	Inscription label for pressure zone separation • 4 inscription labels, duct 1/3/5 blocked • 4 inscription labels, duct 1 blocked • 4 inscription labels, duct 3/5 blocked	3x4 pieces	8003303	ASLR-L-S6-2016
N rail mounting					
	_	VTSA and VTSA-F	3 pieces	526032	CPX-CPA-BG-NRH
all mounting					
	-	Mounting bracket with a mounting hole for M5 screw	5 pieces	539214	VAME-S6-10-W
	U	Mounting bracket with a mounting hole for M4 screw and a mounting hole for M6 screw	1 piece	567038	VAME-S6-W-M46
	AW	Mounting bracket for length compensation on the CPX side when mounting using support system Set comprising 1 angle bracket and 2 screws	1 piece	2721419	CPX-M-BG-VT-2X
ser documentatior		'			
	D E	User documentation for valve terminal VTSA/VTSA-F	German English	538922 538923	VTSA/VTSA-F-DE VTSA/VTSA-F-EN
neumatic connecti	on accesso	ries	1		
selection of possil	ole fittings, essories ca	blanking plugs, silencers and an be found in the chapter Accessories a page 242			

Function1)
Valves with code SO, SQ, SS,
width 18 mm




Valves with code SO, SQ, SS, width 26 mm






Valve width
18 mm
26 mm

Voltage 24 V DC



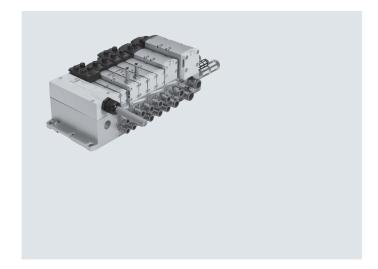

ISO valves with switching position sensing for safety-related pneumatic components Function

The single solenoid 5/2-way valve with spring return in width 18 mm and 26 mm features valve diagnostics. It is available as a valve with plug-in or individual connection with pilot valves to ISO 15218 and square plug type C.

The normal position of the piston spool is monitored by the inductive sensor.

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control system.

This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1. The control block has been developed and manufactured in accordance with the basic and proven safety principles of EN ISO 13849-2.

This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

Decentralised individual connection variant

Valve on individual sub-base (square plug or plug-in) with integrated switching position sensing.

The electrical connection is established via either a standardised 4-pin M12 plug 24 V DC (ISO 15407-2), a 4-pin spring-loaded terminal or a cable (open end) 24 V DC, which can be configured by the user.

The individual sub-base can be supplied with internal or external pilot air depending on the version.

Variant for valve terminal VTSA/VTSA-F



The valves with integrated switching position sensing in plug-in design for valve terminal VTSA/VTSA-F/VTSA-F-CB can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

Pilot air supply:
The valve terminal can be supplied with internal or external pilot air via the various end plate variants.



Note

Valves in plug-in design are always supplied with pilot air via duct 14 in the manifold subbase.

1) The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. In accordance with ISO 1219-1, this symbol is used for both N/O and N/C. The switching element function of the sensors used here is designed as an N/C contact.



Pilot exhaust air port 12 is exhausted directly at the valve, without a

If the customer requests a "turned seal", exhaust air is vented at the end plates of the valve terminal, which doesn't conform to the ISO standard.

158

Safety data				
Conforms to standard	EN 13849-1/2			
CE marking (see declaration of conformity)	To EU EMC Directive 1)			
Shock resistance	Shock test with severity level 2, to EN 60068-2-27			
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6			

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp d Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety data				
Valve function 5/2-way, single solenoid	Test pulses			
	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]		
VSVA-B-M52-MZA1-1T1L	1200	1100		
VSVA-B-M52-MZA2-1T1L	1500	800		
VSVA-B-M52-MZ-A1-1C1	1800	800		

General technical data			
Valve	VSVA-B-M52-MZD-A2-1T1L	VSVA-B-M52-MZD-A1-1T1L	VSVA-B-M52-MZ-A1-1C1
Width	18 mm	26 mm	26 mm
Conforms to	ISO 15407-2	•	ISO 15407-1
Design	Piston spool valve		
Sealing principle	Soft		
Actuation type	Electrical		
Type of control	Piloted		
Exhaust function, can be throttled	Via individual sub-base, via throttle	plate	
Lubrication	Lifetime lubrication		
Type of mounting	Via through-hole, on manifold sub-	base	
Mounting position	Any		
Manual override	Concealed		
Individual sub-base			→ Page 228
Valve terminal			→ Page 84

Standard nominal flow rate [l/min]							
Valve function	Flow rate						
	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve on individual sub-base			
VSVA-B-M52-MA1-1C1-ANC	1400	1100	-	1100			
VSVA-B-M52-MA1-1C1-ANP	1400	1100	_	1100			
VSVA-B-M52-MA1-1C1-APC	1400	1100	_	1100			
VSVA-B-M52-MA1-1C1-APP	1400	1100	_	1100			
VSVA-B-M52-MA1-1T1L-ANC	1400	1100	1350	1200			
VSVA-B-M52-MA1-1T1L-ANP	1400	1100	1350	1200			
VSVA-B-M52-MA1-1T1L-APC	1400	1100	1350	1200			
VSVA-B-M52-MA1-1T1L-APP	1400	1100	1350	1200			
VSVA-B-M52-MA1-1T1L-APX-0.5	1400	1100	1350	1200			
VSVA-B-M52-MA2-1T1L-ANP	750	550	700	600			
VSVA-B-M52-MA2-1T1L-APP	750	550	700	600			
VSVA-B-M52-MA2-1T1L-APX-0.5	750	550	700	600			

Valve switching times [ms]					
Valve		VSVA-B-M52-MZD-A2-1T1L	VA-B-M52-MZD-A2-1T1L VSVA-B-M52-MZD-A1-1T1L \		
Width		18 mm	26 mm	26 mm	
Valve switching times	On	12	20	21	
	Off	38	54	41	
Sensor switching times	On	32	60	60	
	Off	9	11	11	

Electrical data for valve					
Valve		VSVA-B-M52-MZD-A2-1T1L	VSVA-B-M52-MZD-A1-1T1L	VSVA-B-M52-MZ-A1-1C1	
Width		18 mm	26 mm	26 mm	
Electrical connection		4-pin plug to ISO 15407-2		Plug to EN 175301-803, type C, without PE conductor	
Nominal operating voltage	[V DC]	24			
Permissible voltage fluctuations	[%]	±10		-15/+10	
Surge resistance	[kV]	2.5			
Pollution degree		3			
Power consumption	[W]	1.6		1.8	
Switching position sensing		Normal position via sensor			
Duty cycle [%]		100			
Degree of protection to EN 60529		IP65, NEMA 4 (for all types of signal transmission when mounted)			
Signal status indication		LED Via accessories			

Electrical data for sensor		
Electrical connection		Cable, 3-core
		Plug M8x1, 3-pin
Cable length	[m]	2.5
Switching output		PNP or NPN
Switching element function		N/C
Switching status indication		Yellow LED
Operating voltage range	[V DC]	10 30
Residual ripple	[%]	±10
Sensor no-load current	[mA]	≤10
Max. output current	[mA]	200
Voltage drop	[V]	≤2
Max. switching frequency	[Hz]	5000
Short circuit current rating		Pulsed
Reverse polarity protection for		For all electrical connections
sensor		
Measuring principle		Inductive
Switching position sensing		Valve normal position via sensor


Operating and environmental of	onditions				
Valve		VSVA-B-M521T1L		VSVA-B-M521C1	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Notes on operating/ Pilot medium		Lubricated operation possible (in which case lub	oricated opera	ation will always be required)	
Operating pressure	[bar]	-0.9 10		-0.9 16	
	[MPa]	-0.09 1		-0.09 1.6	
Operating pressure for valve	[bar]	3 10			
terminal with internal pilot air supply	[MPa]	0.3 1	0.3 1		
Pilot pressure	[bar]	310			
	[MPa]	0.3 1			
Ambient temperature	[°C]	-5 +50			
Temperature of medium	[°C]	-5 +50			
Note on materials		RoHS-compliant			
Noise level LpA	[dB(A)]	85			
CE marking (see declaration of conformity)		To EU EMC Directive ¹)			
UKCA marking (see declaration of		To UK EMC regulations1)			
conformity)					
KC marking		KC EMC			
Certification		C-Tick		C-Tick	
		c UL us - Recognized (OL)			


¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Materials	
Sub-base/manifold sub-base	Die-cast aluminium
Valve	Die-cast aluminium, PA
Seals	FPM, NBR
Screws	Galvanised steel
Sensor housing	High-alloy stainless steel
Sensor cable sheath	TPE-U(PUR)

Product weight [g]	Product weight [g]					
Width	18 mm	26 mm				
5/2-way solenoid valve type						
VSVA-B-M52-MA2-1T1L-APX-0.5	157	-				
VSVA-B-M52-MA2-1T1L-APP	140	-				
VSVA-B-M52-MA2-1T1L-ANP	140	-				
VSVA-B-M52-MA1-1T1L-APC	_	307				
VSVA-B-M52-MA1-1T1L-APP	_	264				
VSVA-B-M52-MA1-1C1-APC	_	332				
VSVA-B-M52-MA1-1C1-APP	_	289				
VSVA-B-M52-MA1-1T1L-ANC	_	307				
VSVA-B-M52-MA1-1T1L-ANP	-	264				
VSVA-B-M52-MA1-1C1-ANC	_	332				
VSVA-B-M52-MA1-1C1-ANP	_	289				
VSVA-B-M52-MA1-1T1L-APX-0.5	_	281				
Individual connection						
Individual sub-base	192	302				

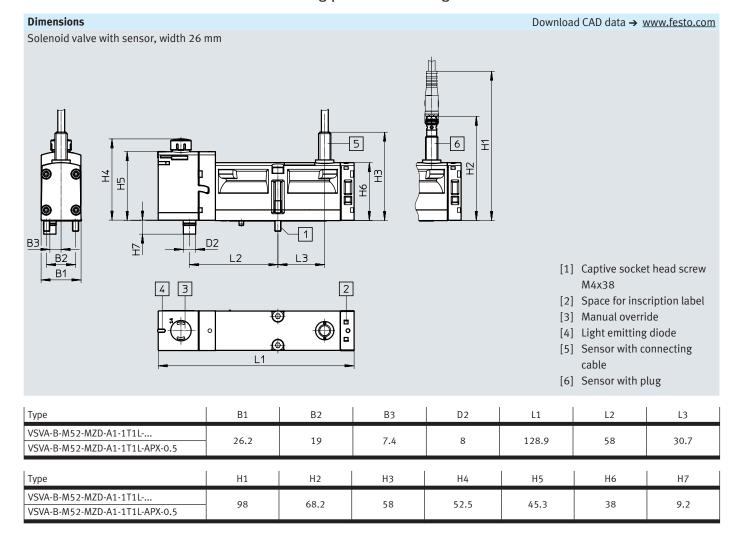

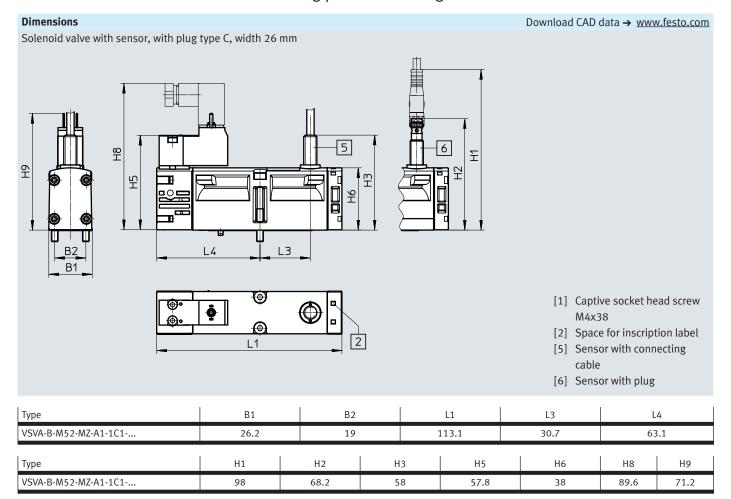

Ordering data – Solenoid valve with switching position sensing

Ordering data - Soler	noid valve	VSVA, MO non-detenting/detenting (D)					
	Code	Valve function	Width	Part no.	Туре		
5/2-way solenoid valv	5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity switch						
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	560723	VSVA-B-M52-MZD-A1-1T1L-APC		
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	560742	VSVA-B-M52-MZD-A1-1T1L-ANC		
₹	SS	5/2-way valve, single solenoid, mechanical spring return,	18 mm	573201	VSVA-B-M52-MZD-A2-1T1L-APX-0.5		
		inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	570850	VSVA-B-M52-MZD-A1-1T1L-APX-0.5		
	S0	5/2-way valve, single solenoid, mechanical spring return,	18 mm	573202	VSVA-B-M52-MZD-A2-1T1L-APP		
		inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	560724	VSVA-B-M52-MZD-A1-1T1L-APP		
	SQ	5/2-way valve, single solenoid, mechanical spring return,	18 mm	573203	VSVA-B-M52-MZD-A2-1T1L-ANP		
		inductive sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	560743	VSVA-B-M52-MZD-A1-1T1L-ANP		

Ordering data – Sole	Ordering data – Solenoid valve VSVA with cover cap for MO non-detenting/heavy duty, detenting via accessory (TR)							
	Code	Valve function	Width	Part no.	Туре			
5/2-way solenoid val	5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity switch							
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033026	VSVA-B-M52-MZTR-A1-1T1L-APC			
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033030	VSVA-B-M52-MZTR-A1-1T1L-ANC			
	SS	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033459	VSVA-B-M52-MZTR-A2-1T1L-APX-0.5			
		inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	8033034	VSVA-B-M52-MZTR-A1-1T1L-APX-0.5			
	SO	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033460	VSVA-B-M52-MZTR-A2-1T1L-APP			
		inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	8033027	VSVA-B-M52-MZTR-A1-1T1L-APP			
	SQ	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033461	VSVA-B-M52-MZTR-A2-1T1L-ANP			
		inductive sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033031	VSVA-B-M52-MZTR-A1-1T1L-ANP			

Ordering data – Solenoid valve with switching position sensing

Ordering data – Soler	Ordering data – Solenoid valve VSVA with cover cap for MO, non-detenting (H)						
	Code	Valve function	Width	Part no.	Туре		
5/2-way solenoid valv	5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity switch						
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033049	VSVA-B-M52-MZH-A1-1T1L-APC		
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033053	VSVA-B-M52-MZH-A1-1T1L-ANC		
(P)>	SS	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033477	VSVA-B-M52-MZH-A2-1T1L-APX-0.5		
		inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	8033057	VSVA-B-M52-MZH-A1-1T1L-APX-0.5		
	S0	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033478	VSVA-B-M52-MZH-A2-1T1L-APP		
		inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	8033050	VSVA-B-M52-MZH-A1-1T1L-APP		
	SQ	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033479	VSVA-B-M52-MZH-A2-1T1L-ANP		
		inductive sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033054	VSVA-B-M52-MZH-A1-1T1L-ANP		

Ordering data - Soler	Ordering data – Solenoid valve VSVA with cover cap for MO, concealed						
	Code	Valve function	Width	Part no.	Туре		
5/2-way solenoid valv	5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity switch						
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033072	VSVA-B-M52-MZ-A1-1T1L-APC		
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033076	VSVA-B-M52-MZ-A1-1T1L-ANC		
P>	SS	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033495	VSVA-B-M52-MZ-A2-1T1L-APX-0.5		
		inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	8033080	VSVA-B-M52-MZ-A1-1T1L-APX-0.5		
	S0	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033496	VSVA-B-M52-MZ-A2-1T1L-APP		
		inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	8033073	VSVA-B-M52-MZ-A1-1T1L-APP		
	SQ	5/2-way valve, single solenoid, mechanical spring return,	18 mm	8033497	VSVA-B-M52-MZ-A2-1T1L-ANP		
		inductive sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033077	VSVA-B-M52-MZ-A1-1T1L-ANP		

Ordering data – Solenoid valve with switching position sensing

Ordering data	Ordering data						
	Code	Valve function	Width	Part no.	Туре		
Solenoid valves, 24 V DC, with pneumatic interface to ISO 15218 for individual sub-base							
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m, electrical connection to EN 175301-803, type C	26 mm	560725	VSVA-B-M52-MZ-A1-1C1-APC		
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m, electrical connection to EN 175301-803, type C	26 mm	560744	VSVA-B-M52-MZ-A1-1C1-ANC		
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1, electrical connection to EN 175301-803, type C	26 mm	560726	VSVA-B-M52-MZ-A1-1C1-APP		
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1, electrical connection to EN 175301-803, type C	26 mm	560745	VSVA-B-M52-MZ-A1-1C1-ANP		



- The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Return the module to Festo for repair in the event of a fault.
- Valves with switching position sensing from the VSVA-B-M52-... series can only
 be ordered individually. If these are used on a valve terminal, appropriate vacant
 positions must be provided for them. Exceptions are the valves with ident. code
 SS, SO and SQ.

Accessories – Solenoid valve with switching position sensing

	Code	Description			Part no.	Туре
ndividual sub-base	nort natte	ern to ISO 15407-2, electrical connection via plug M12		<u>:</u>	•	
		Threaded connection, internal pilot air supply,	G1/8	18 mm	541070	VABS-S4-2S-G18-B-R3
		lateral connections	G1/4	26 mm	541069	VABS-S4-1S-G14-B-R3
	_	Threaded connection, external pilot air supply,	G1/8	18 mm	541064	VABS-S4-2S-G18-R3
(a)		lateral connections	G1/4	26 mm	541063	VABS-S4-1S-G14-R3
		taterat connections	01/4	20 111111	341003	VABS-34-13-014-K3
ıdividual sub-base	port patte	ern to ISO 15407-2, electrical connection via cable termina	als		,	
		Threaded connection, internal pilot air supply,	G1/8	18 mm	541067	VABS-S4-2S-G18-B-K2
		lateral connections	G1/4	26 mm	541065	VABS-S4-1S-G14-B-K2
1600	. -	Threaded connection, external pilot air supply,	G1/8	18 mm	539723	VABS-S4-2S-G18-K2
	}	lateral connections	G1/4	26 mm	539725	VABS-S4-1S-G14-K2
lug socket for the	electrical co	onnection of individual valves, type C				
	_	Angled socket, type C, 3-pin			151687	MSSD-EB
		Straight plug, PG7				
		• 230 V AC				
		Angled socket, type C, 3-pin			539712	MSSD-EB-M12
~		Straight plug, M12x1				
luminating spal for	rconnectio	n pattern to EN 175301-803, type C			Datacheet	s → Internet: meb-ld
Cullinating seat for		For plug socket MSSD, 12 24 V DC			151717	MEB-LD-12-24DC
		101 plug 50cket Wi33D, 12 24 V DC			151/1/	MILD-LD-12-24DC
√						
onnecting cable fo		connection of individual valves, type C		_		
	GG	Angled socket, type C, 3-pin, with LED	2.	.5 m	151688	KMEB-1-24-2.5-LED
	GH		_		454400	
		• Open end, 3-core	F-	m	151689	KMEB-1-24-5-LED
\checkmark	GJ	• Open end, 3-core • 24 V DC, PVC	F-	m O m	151689 193457	
_	GJ		F-			KMEB-1-24-5-LED
⇒	GJ		F-			KMEB-1-24-5-LED
		• 24 V DC, PVC	F-			KMEB-1-24-5-LED
	or the electr	24 V DC, PVC rical connection of sensors for switching position sensing	10	O m	193457	KMEB-1-24-5-LED KMEB-1-24-10-LED
		• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin	10			KMEB-1-24-5-LED
	or the electr	24 V DC, PVC ical connection of sensors for switching position sensing Straight socket, M8x1, 3-pin Open end, 3-core	2.	0 m	193457 8078223	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3
	or the electr	24 V DC, PVC rical connection of sensors for switching position sensing Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin	2.	O m	193457	KMEB-1-24-5-LED KMEB-1-24-10-LED
	or the electr	24 V DC, PVC Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core	2.	5 m	8078223 8078224	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3
	or the electr	24 V DC, PVC Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin	2.	0 m	193457 8078223	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3
	or the electr GM GN	24 V DC, PVC Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core	2.	5 m m	8078223 8078224 8078230	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3 NEBA-M8G3-U-5-N-LE3
	or the electr	• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin • Open end, 3-core • Straight socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin	2.	5 m	8078223 8078224	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3
	or the electr GM GN	24 V DC, PVC ical connection of sensors for switching position sensing Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core	2. 5 2.	5 m m 5 m	8078223 8078224 8078230 8078230	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3
	or the electr GM GN	• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin • Open end, 3-core • Straight socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin	2. 5 2.	5 m m	8078223 8078224 8078230	KMEB-1-24-5-LED KMEB-1-24-10-LED NEBA-M8G3-U-2.5-N-LE3 NEBA-M8G3-U-5-N-LE3
	or the electr GM GN	• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3
	or the electr GM GN	• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin	2. 5 2. 5 2.	5 m m 5 m	8078223 8078224 8078230 8078230	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3
onnecting cable for	GN GO GP -	24 V DC, PVC cical connection of sensors for switching position sensing Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3
connecting cable for	GN GO GP - ion accesso	24 V DC, PVC cical connection of sensors for switching position sensing Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Open end, 3-core ories	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3
eneumatic connections selection of possi	GN GO GP - ion accesso	24 V DC, PVC Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Ories , blanking plugs, silencers and	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3
neumatic connecting ther pneumatic ac	GN GO GP - ion accesso ible fittings, accessories ca	• 24 V DC, PVC rical connection of sensors for switching position sensing • Straight socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core • Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core ories • blanking plugs, silencers and an be found in the chapter Accessories a page: 242	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3
Pneumatic connection is selection of possible pneumatic action on the website view on the website view on the website view of	GN GO GP - ion accesso ible fittings, accessories ca ia the indivi	24 V DC, PVC Straight socket, M8x1, 3-pin Open end, 3-core Straight socket, M8x1, 3-pin Open end, 3-core Angled socket, rotatable, M8x1, 3-pin Open end, 3-core Ories , blanking plugs, silencers and	2. 5 2. 5 2.	5 m m 5 m m	8078223 8078224 8078230 8078230 8001660	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8W3-U-2.5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3 NEBA-M8W3-U-5-N-LE3

Datasheet - Control block with safety function for VTSA/VTSA-F

- 11 -


Flow rate on valve terminal: 830 l/ min



Operating pressure
0.3 ... 1 MPa
3 ... 10 bar

- **[]** - Solenoid valve width 26 mm



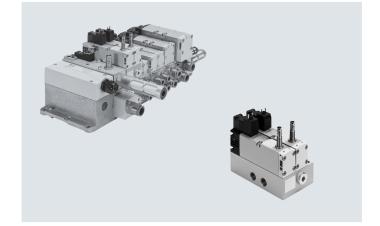

Description

The control block is designed for two-channel control of pneumatic drive components such as double-acting linear cylinders and can be used to realise the following protective measures:

- Protection against unexpected start-up (EN 1037)
- Reversing hazardous movements, provided the reversing motion will not result in further hazards


The control attributes of the control block enable Performance Level e to be achieved for the protective measures.
The control block has been developed and manufactured in accordance with the basic and proven safety principles of EN ISO 13849-1 and EN ISO 13849-2.

The requirements of EN ISO 13849-1 and EN ISO 13849-2 (e.g. CCF, DC) must be taken into consideration when installing and operating the component and when using it in higher categories (2 to 4). When using this product in machines or systems subject to specific C standards, the requirements specified in these standards must be observed.

The control block with safety function is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode)!

The control block with safety function is suitable for use as a press safety valve to EN 962.

Version for valve terminal VTSA/VTSA-F



The valves with integrated switching position sensing on manifold sub-base for valve terminal VTSA/VTSA-F need to be supplied with power regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

The electrical connection for the solenoid valves is established separately via a standardised square plug to EN 175301-803, type C. The switching position sensing of the inductive PNP or NPN proximity switch is via a push-in connector size M8x1 to EN 61076-2-104.



Note

The appropriate manifold subbase VABV-S4- ..., which is required for integration into the valve terminal, is not part of the control block. It is automatically allocated by the configurator when the control block is selected.

- 🖣 - Note

The control block with safety function (VOFA) is also available as a decentralised individual connection variant with electrical and pneumatic individual connection.

For information see:

→ Internet: vofa

Datasheet - Control block with safety function for VTSA/VTSA-F

Pneumatic/electrical links

Function


The safety function is achieved by linking two pneumatic ducts of two 5/2-way single solenoid valves within the control block: port (4) is only pressurised if both solenoid valves are switched to the switching position (14). Port (2) is always supplied with compressed air if at least one of the two solenoid valves is in normal position.

The valves are reset via a mechanical spring.
The switching operation of the solenoid valves can be sensed using the proximity switches on the solenoid valves (switching position sensing).

By connecting the control signal and the switching signal of the proximity switch it is possible to check if the piston spools of the solenoid valves have reached or left the normal position (expectations). The piston spools of the solenoid valves are designed to prevent pneumatic short circuits between the ports (2) and (4) are prevented (positive overlap).

The two solenoid valves must be actuated via two separate ducts to achieve the required category 4 (Performance Level e, to EN ISO 13849-1).

Circuit symbol1)

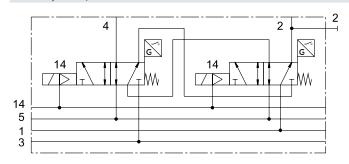

For the control block with safety function VOFA-B26-T52-... for the valve terminal, two 5/2-way solenoid valves of width 26 mm are pneumatically linked via two ducts, using an intermediate plate as vertical stacking element (output 2 is switched in parallel, output 4 is switched in series).

1) The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. The switching element function of the sensors used here is designed as an N/C contact.

Safety data			
Conforms to standard	EN 13849-1		
Safety function	Protection against manipulation, prevention of unexpected start-up		
	Reversing a movement		
Performance level (PL)	Protection against manipulation, prevention of unexpected start-up/up to category 4, Performance Level e		
	Reversing a movement/up to category 4, Performance Level e		
Note on forced checking procedure	Switching frequency at least once a week		
Certificate-issuing authority	IFA 1001179		
CE marking (see declaration of	To EU EMC Directive ¹)		
conformity)	To EU Machinery Directive		
Max. positive test pulse [μs] with logic 0	1000		
Max. negative test pulse $[\mu s]$ with logic 1	800		
Shock resistance	Shock test with severity level 2, to EN 60068-2-27		
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6		


¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet – Control block with safety function for VTSA/VTSA-F

Peripherals overview

Electrical connection option for control block with safety function via PROFIsafe shut-off module CPX-FVDA-P2 (safety module)

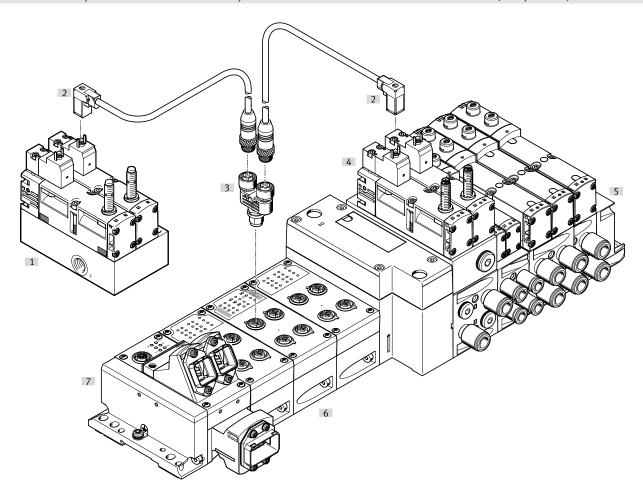

Perip	eripherals overview					
		Description	→ Page/Internet			
[1]	Control block with safety function	Away from the valve terminal as a decentralised individual connection variant	vofa			
[2]	Connecting cable KMEB	For electrical connection of the control block with safety function via PROFIsafe shut-off module CPX-FVDA-P2 (safety module)	kmeb			
[3]	Push-in T-connector NEDU	For simultaneously actuating two valves, e.g. control block with safety function	nedu			
[4]	Control block with safety function	Integrated in the pneumatic section of the valve terminal VTSA/VTSA-F	_			
[5]	Pneumatic section of the valve terminal VTSA/VTSA-F	Pneumatic components of the valve terminal VTSA/VTSA-F	-			
[6]	CPX-FVDA-P2 (safety module)	PROFIsafe shut-off module integrated in the CPX terminal of the valve terminal VTSA/VTSA-F	срх			
[7]	CPX terminal of the valve terminal VTSA/ VTSA-F	Electrical components of the valve terminal VTSA/VTSA-F	_			

Datasheet – Control block with safety function for VTSA/VTSA-F

General technical data		
Design		Piston spool valve
Standard nominal flow rate	[l/min]	830
Reset method		Mechanical spring
Sealing principle		Soft
Exhaust air function		Can be throttled
Actuation type		Electrical
Overlap		Positive overlap
Type of control		Piloted
Flow direction		Not reversible
Exhaust air function		Can be throttled
Suitable for vacuum		-
Nominal width	[mm]	9
Pilot air supply		Via valve terminal
Type of mounting		Via through-hole, on manifold sub-base
Mounting position		Any
Manual override		-
Signal status display, valve		With accessories
Pneumatic connections		
Supply	1	Via the manifold sub-base of the valve terminal
Exhausting	3/5	
Working ports	2/4	
Pilot air supply	14	
Pressure gauge		G1/4

Operating and environmenta	l conditions	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/ Pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure	[bar]	010
	[MPa]	01
Operating pressure for valve	[bar]	310
terminal with internal pilot air supply	[MPa]	0.3 1
Pilot pressure	[bar]	310
	[MPa]	0.3 1
Noise level LpA	[dB(A)]	85
Ambient temperature	[°C]	-5 +50
Temperature of medium	[°C]	-5 +50
CE marking (see declaration of	f	To EU EMC Directive¹)
conformity)		To EU Machinery Directive

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet – Control block with safety function for VTSA/VTSA-F

Electrical data for o	ontrol blo	ock	
Electrical connection			Plug to EN 175301-803, type C, without PE conductor
Nominal operating	voltage	[V DC]	24
Permissible voltage		[%]	-15/+10
fluctuations			
Surge resistance		[kV]	2.5
Pollution degree			3
Power consumption	1	[W]	1.8
Max. magnetic disru	uption	[mT]	60
field			
Switching position	sensing		Normal position via sensor
Duty cycle		[%]	100
Degree of protectio	n to EN 6	0529	IP65, NEMA 4 (for all types of signal transmission when mounted)
Protection against of	lirect and		PELV
indirect contact			Protection class to EN 60950/IEC 950
Valve switching	On	[ms]	22
time	Off	[ms]	59
Valve sensor	On	[ms]	60
switching time 1)	Off	[ms]	11

¹⁾ Valve sensor switching time off: period of time from the coil being energised to the sensor being switched off when using a PNP sensor.

Valve sensor switching time on: period of time from the coil being de-energised to 0-L edge at the sensor when using a PNP sensor.



With a duty cycle of 100%, the control block must be de-energised once a week.

Electrical data – Sensor (to E	N -60947-5	-2)
Electrical connection		Cable, 3-core Plug M8x1, 3-pin
Cable length	[m]	2.5
Switching output		PNP or NPN
Switching element function		N/C
Signal status indication		Yellow LED
Operating voltage range	[V DC]	10 30
Residual ripple	[%]	±10
Sensor no-load current	[mA]	Max. 10
Max. output current	[mA]	200
Voltage drop	[V]	Max. 2
Max. switching frequency	[Hz]	5000
Short circuit current rating		Pulsed
Reverse polarity protection for sensor		For all electrical connections
Measuring principle		Inductive

Materials	
Sub-base/manifold sub-base	Wrought aluminium alloy
Valve	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Sensor housing	High-alloy stainless steel
Sensor cable sheath	PUR
Note on materials	RoHS-compliant

Datasheet - Control block with safety function for VTSA/VTSA-F

Dimensions L3 2 1 Ī 3 \oplus 4 B2 L2

[1] Proximity switch PNP or NPN, size M8x1, plug connection to EN 61076-2-104

В1

- [2] Electrical connection to EN 175301-803, type C
- [3] Pneumatic connection G1/4 sealed with blanking plug
- (width across flats 2.5),

Download CAD data → www.festo.com

[4] 2x screw with internal hex M4x12 (included in the scope of delivery)

VOFA-B26-T52-M-1C1-APP 53 46 37 105.8 34.6 17 133.7 128.5 109.2 78.5	Туре	B1	B2	В3	H1	H2	Н3	L1	L2	L3	L4
	VOFA-B26-T52-M-1C1-APP	5.2	46	27	105.9	246	17	122.7	120 5	100.2	70 E
	VOFA-B26-T52-M-1C1-ANP))	40	37	105.6	34.0	17	155./	120.5	109.2	/ 0.5

Ordering data							
	Valve function	Code	Switching output	Width	Weight	Part no.	Туре
				[mm]	[g]		
Control block, version	for valve terminal VTSA/VTSA-F						
	2x 5/2-way valve, single solenoid,	SP ²⁾	PNP	53	1112	_ 1)	VOFA-B26-T52-M-1C1-APP
	mechanical spring return, with switching position sensing via inductive sensor and 3-pin sensor push-in connector M8, mounted on intermediate plate for pneumatic linking	SN ²⁾	NPN	53	1112	_ 1)	VOFA-B26-T52-M-1C1-ANP

- The control block with safety function can only be ordered via the valve terminal configurator and therefore does not have a separate part number. The appropriate manifold sub-base required for the $valve\ terminal\ VTSA/VTSA-F\ is\ automatically\ allocated\ to\ the\ control\ block\ by\ the\ configurator$
- Code letter within the order code for a valve terminal configuration


Note

The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve.

Please contact Festo in the event of a malfunction.

Accessories – Control block with safety function for VTSA/VTSA-F

Ordering data	Code	Description		Part no.	Туре	
lug socket for the	electrical c	onnection of individual valves, type C			71	
A SOCIAL TOT LITE	-	Angled socket, type C, 3-pin		151687	MSSD-EB	
		Screw terminal				
	_	Angled socket, type C, 3-pin		539712	MSSD-EB-M12	
\downarrow		• Straight plug, M12x1				
		With switching position indication				
uminating seal fo	or connection	n pattern to EN 175301-803, type C		Datasheet	s → Internet: meb-ld	
		For plug socket MSSD, 12 24 V DC		151717	MEB-LD-12-24DC	
onnecting cable for	or electrical	connection of individual valves, type C				
M.	GG	Angled socket, type C, 3-pin, with LED	2.5 m	151688	KMEB-1-24-2.5-LED	
29	GH	Open end, 3-core	5 m	151689	KMEB-1-24-5-LED	
	GJ	• 24 V DC, PVC	10 m	193457	KMEB-1-24-10-LED	
≫						
onnecting cable for	or the elect	rical connection of sensors for switching position sensing				
	GM	Straight socket, M8x1, 3-pin	2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3	
		Open end, 3-core				
	GN	Straight socket, M8x1, 3-pin	5 m	8078224	NEBA-M8G3-U-5-N-LE3	
		Open end, 3-core				
	-	Angled socket, rotatable, M8x1, 3-pin	2.5 m	8001660	NEBU-M8R3-K-2.5-LE3	
		Open end, 3-core				
	-	Angled socket, rotatable, M8x1, 3-pin	5 m	8001661	NEBU-M8R3-K-5-LE3	
		Open end, 3-core				
nnecting cable f	or the elect	rical connection of PROFIsafe shut-off module CPX-FVDA-P2 to the	1			
	-	For the easy connection of one control block valve (power	0.5 m	177677	KMEB-2-24-M12-0.5-LED	
		supply via PROFIsafe shut-off module CPX-FVDA-P2)				
		 Angled socket, type C, 3-pin, with LED Straight plug M12x1, 5-pin 				
		• 24 V DC, PUR				
ush-in T-connecto	or for dual e	lectrical connection of PROFIsafe shut-off module CPX-FVDA-P2 to	the control bloo	ck		
	<u> </u>	For dual connection of two control block valves (power supply		2839867	NEDU-L2R1-V10-M12G5-M12G	
		shut-off module CPX-FVDA-P2)				
		• Straight plug, M12x1, 5-pin (A-coded)				
		• 2x straight socket, M12x1, 5-pin (A-coded)				
		Operating voltage range 0 30 V DC				
neumatic connect	tion accesso	ories				
		, blanking plugs, silencers and				
ther pneumatic a	ccessories c	can be found in the chapter Accessories a page: 242				
		idual search terms:				
ternet → connec	tion techno	ology, silencer, blanking plug				



Flow rate
150 l/min (18 mm)
450 l/min (26 mm)

Valve width
18 mm
26 mm

- **** - Voltage 24 V DC

Operating pressure
-0.9 ... 10 bar
-0.09 ... 1 MPa

Description

The combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S enables the pilot air to be verifiably switched on and off (sensing function) from duct 1 to 14 for the entire pressure zone or valve terminal.

This combination is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control system.

This combination is suitable for use in safety-related parts of control systems to

EN ISO 13849-1. This combination is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

Alternative switching position sensing with pressure switch

As an alternative to the sensing function in the solenoid valve, a pressure switch can be mounted (in place of the blanking plug) on the intermediate plate VABF-S4-...-S. With this pressure switch, the switching on and off (sensing function) of the pilot air supply can be verified.

An ISO solenoid valve without a sensor can therefore be mounted on the intermediate plate to give the same function.

→ Internet: spba



The pilot air switching valve/the intermediate plate for switchable pilot air can only be operated on the valve terminal VTSA/VTSA-F in combination with a right end plate for external pilot air type VABE-S6-1RZ-.... Port 14 on the right end plate must then be sealed.

Vertical stacking variant for valve terminal VTSA/VTSA-F, width 18 mm, 26 mm



The valves with integrated switching position sensing in plug-in design for valve terminal VTSA/VTSA-F can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

This module is supplied preassembled together with the valve terminal VTSA/VTSA-F. No other assembly steps are required before installation. Switching position sensing is carried out using an inductive PNP proximity switch with cable and M12x1 push-in connector to EN 61076-2-104.
Alternatively, combinations with a pressure switch in the intermediate plate and ISO solenoid valves are possible.




All solenoid valves VSVA to ISO 15407-1 can be used.

→ Internet: vsva

¹⁾ The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. The switching element function of the sensors used here is designed as an N/C contact.

Function of pneumatic/electrical links



The function for switching off the pilot air is essentially achieved by combining the intermediate plate type VABF-S4-...-S with the 5/2-way single solenoid valve.

The valve terminal is not supplied with any pilot air via the right end plate type VABE-S6-1 (ident. code XS, external pilot air). Port 14 on the end plate is sealed.

The pilot air for the valve is branched from duct (1) in the intermediate plate and redirected to the pilot air duct (14) of the valve terminal when the valve is in the switching position. Ports (2) and (4) of the manifold sub-base are sealed with blanking plugs. The switching operation of the solenoid valve can be sensed using the proximity switch in the solenoid valve (or pressure sensor in the intermediate plate VABF...).

By connecting the control signal and the switching signal of the proximity switch it is possible to check if the piston spools of the solenoid valves have reached or left the normal position (expectations).

The piston spool of the solenoid valve is designed so that pneumatic short circuits between the ports (2) and (4) are prevented (positive overlap).

Alternatively, combinations with a pressure switch in the intermediate plate and ISO solenoid valves are possible.



A valve from the modular system VTSA/VTSA-F can be provided or configured to the right of the valve with switching position sensing on the intermediate plate of the pilot air switching valve.

Pilot air switching valve with integrated switching position monitoring
The pilot air switching valve can
be ordered as a combination of a
5/2-way solenoid valve with
switching position sensing and
intermediate plate VABF-S4-...-S.

Alternative switching position sensing with pressure switch

As an alternative to the pilot air switching valve with integrated switching position sensing, it is possible to combine an ISO solenoid valve and a pressure switch in the intermediate plate.

To do this, various 5/2-way solenoid valves in combination with a pressure switch SPBA-... are available.

Safety data				
Conforms to standard	EN 13849-1/2			
CE marking (see declaration of conformity)	To EU EMC Directive 1)			
Shock resistance	Shock test with severity level 2, to EN 60068-2-27			
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6			

¹⁾ For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety data		
Valve function 5/2-way, single solenoid	Test pulses	
	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]
VSVA-B-M52-MZA1-1T1L	1200	1100
VSVA-B-M52-MZA2-1T1L	1500	800
VSVA-B-M52-MZ-A1-1C1	1800	800


General technical data			
		Solenoid valve type VSVA-B-M52-MZD-A2-1T1L-APX-0.5 mounted on valve terminal VTSA/VTSA-F	Solenoid valve type VSVA-B-M52-MZD-A1-1T1L-APX-0.5 mounted on valve terminal VTSA/VTSA-F
Width		18 mm	26 mm
Design		Piston spool valve	
Sealing principle		Soft	
Overlap		Positive overlap	
Actuation type		Electrical	
Type of control		Piloted	
Type of mounting: Solenoid valve on intermediate plate Intermediate plate on manifold sub-base		M3 M3x12 (captive)	M4 M4x12 (captive)
Mounting position		Any	
Pneumatic connections			
Supply	1	Via the manifold sub-base of the valve terminal	
Exhausting	3/5	Via the manifold sub-base of the valve terminal	
Working ports	2/4	Sealed with blanking plug type B-1/4	
Pilot air supply	14	Via the manifold sub-base of the valve terminal	
Pressure gauge/pressure switch		G1/8	

Switching times [ms]					
Width		18 mm	26 mm		
Valve type		5/2	5/2		
Identifier		MZD-A2	MZD-A1	MZ-A1	
Valve switching time	On	12	20	21	
	Off	38	54	41	
Valve sensor switching time1)	On	32	60	60	
	Off	9	11	11	

⁾ Valve sensor switching time off: period of time from the coil being energised to the sensor being switched off when using a PNP sensor. Valve sensor switching time on: period of time from the coil being de-energised to 0-L edge at the sensor when using a PNP sensor.


Protective circuit

Each solenoid coil VSVA is protected with a spark arresting protective circuit as well as against polarity reversal.

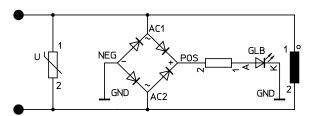

Peripherals overview

Pilot air switching valve/intermediate plate for switchable pilot air with switching position monitoring

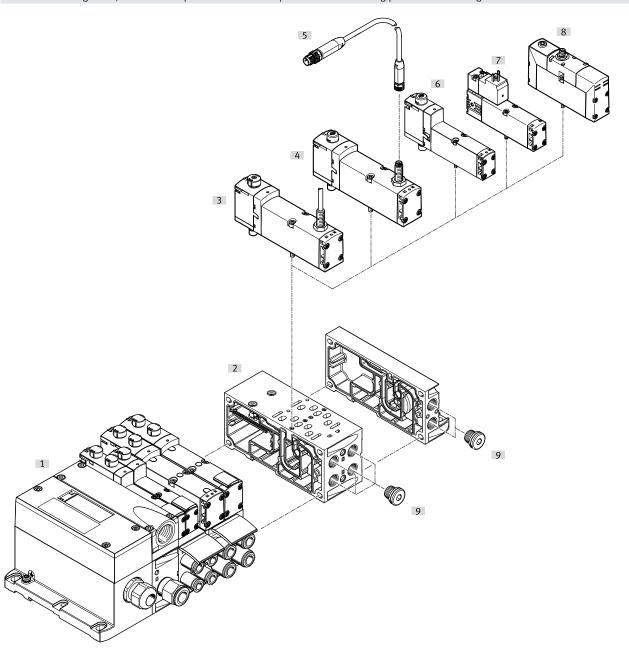

		Description	→ Page/Internet
[1]	Valve terminal VTSA/VTSA-F	Valve terminal with multi-pin plug interface	vtsa
[2]	Manifold sub-base VABF	Width 18 mm or 26 mm	142
[3]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with sensor and integrated cable 0.5 m	180
[4]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with sensor for external connecting cable	180
[5]	Connecting cable NEBU-M8	For connecting to the sensor	181
[6]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm 1)	180
[7]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with plug to EN 175301, type C 1)	180
[8]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with round plug 1)	vsva
[9]	Blanking plug	-	243

The switching position is sensed by pressure switches when the solenoid valves used have no integrated sensor.
 The pressure switch is screwed into the intermediate plate in place of the blanking plug.

Electrical data		
Nominal operating voltage	[V DC]	24
Permissible voltage fluctuations	[%]	±10
Surge resistance	[kV]	2.5
Pollution degree		3
Power consumption	[W]	1.6 (M52-MZD), 1.8 (M52-MZ)
Max. magnetic disruption field	[mT]	60
Switching position sensing		Normal position via sensor
Duty cycle	[%]	100
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)

Electrical data for sensor							
Sensor designation		APP	ANP	APC	ANC	APX	
Switching output		PNP	NPN	PNP	NPN	PNP	
Sensor connection		Plug M8x1, 3-pin		With fixed cable and open end		With fixed cable and plug M12x1, 4-pin	
Cable length	[m]	0.5 (with socket	M8x1, plug M12x1)	2.5		0.5	
Switching element function		N/C		·			
Signal status indication		Yellow LED (on the sensor)					
Operating voltage range	[V DC]	10 30					
Residual ripple	[%]	±10					
Rated operating voltage	[V DC]	24					
Max. no-load supply current	[mA]	10					
Max. output current	[mA]	200					
Max. voltage drop	[V]	2					
Max. switching frequency	[Hz]	5000					
Short circuit current rating		Pulsed					
Reverse polarity protection		For all electrical connections					
Measuring principle		Inductive					
Switching position sensing		Valve normal position via sensor					

Operating and environmental conditions						
Valve		VSVA-B-M521T1L	VSVA-B-M521C1	Without sensor		
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]				
Notes on operating/ Pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)				
Operating pressure	[bar]	-0.9 10	-0.9 16	-0.9 10		
	[MPa]	-0.09 1	-0.09 1	-0.09 1		
Noise level LpA	[dB(A)]	85	85	-		
Ambient temperature [°C]		-5 +50	-5 +50	-5 +50		
Temperature of medium [°C]		-5 +50	-5 +50	-		
Note on materials		RoHS-compliant	RoHS-compliant	RoHS-compliant		
KC marking		KC EMC	KC EMC	-		
UKCA marking		To UK EMC regulations	To UK EMC regulations	-		
Certification		C-Tick	C-Tick	-		
		c UL us Recognized (OL)	-	c UL us Recognized (OL)		

Materials				
Sub-base/manifold sub-base	Die-cast aluminium			
Valve	Die-cast aluminium, PA			
Seals	FPM, NBR			
Screws	Galvanised steel			
Sensor housing	High-alloy stainless steel			
Sensor cable sheath	TPE-U(PUR)			

Product weight [g]					
Width	18 mm	26 mm			
5/2-way solenoid valve type	5/2-way solenoid valve type				
VSVA-B-M52-MA1-1T1L-APC	-	307			
VSVA-B-M52-MA1-1T1L-APP	-	264			
VSVA-B-M52-MA1-1C1-APC	-	332			
VSVA-B-M52-MA1-1C1-APP	-	289			
VSVA-B-M52-MA1-1T1L-ANC	-	307			
VSVA-B-M52-MA1-1T1L-ANP	-	264			
VSVA-B-M52-MA1-1C1-ANC	-	332			
VSVA-B-M52-MA1-1C1-ANP	-	289			
VSVA-B-M52-MA1-1T1L-APX-0.5	-	281			
VSVA-B-M52-MA2-1T1L-APX-0.5	157	-			
VSVA-B-M52-MA2-1T1L-APP	140	-			
VSVA-B-M52-MA2-1T1L-ANP	140	-			
VSVA-B-M52-MA1-1T1L	-	293			
VSVA-B-M52-MA2-1T1L	163	-			

Ordering data – Intermediate plate for switchable pilot air for VTSA/VTSA-F

Ordering data						
	Code	Valve function			Part no.	Туре
5/2-way solenoid val	ve, 24 V D	C, plug-in design with proximity switch				
S	SS	5/2-way valve, single solenoid, mechanical spring return, with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	PNP	18 mm	573201	VSVA-B-M52-MZD-A2-1T1L-APX-0.5
				26 mm	570850	VSVA-B-M52-MZD-A1-1T1L-APX-0.5
	-	5/2-way valve, single solenoid, mechanical spring return, with 2.5 m connecting cable	PNP	26 mm	560723	VSVA-B-M52-MZD-A1-1T1L-APC
			NPN	26 mm	560742	VSVA-B-M52-MZD-A1-1T1L-ANC
	SO	return, with 3-pin sensor push-in connector M8x1	PNP	18 mm	573202	VSVA-B-M52-MZD-A2-1T1L-APP
				26 mm	560724	VSVA-B-M52-MZD-A1-1T1L-APP
	SQ		NPN	18 mm	573203	VSVA-B-M52-MZD-A2-1T1L-ANP
				26 mm	560743	VSVA-B-M52-MZD-A1-1T1L-ANP
<u></u>	_	5/2-way valve, single solenoid, mechanical spring return, with plug to EN 175301, type C, with 2.5 m connecting cable	PNP	26 mm	560725	VSVA-B-M52-MZ-A1-1C1-APC
			NPN	26 mm	560745	VSVA-B-M52-MZ-A1-1C1-ANP
<u>-</u>	_	5/2-way valve, single solenoid, mechanical spring	PNP	26 mm	560726	VSVA-B-M52-MZ-A1-1C1-APP
		return, with plug to EN 175301, type C, with 3-pin sensor push-in connector M8x1	NPN	26 mm	560744	VSVA-B-M52-MZ-A1-1C1-ANC
5/2-way solenoid val	ve, 24 V D	PC, plug-in design				
	-			26 mm	539159	VSVA-B-M52-MZD-A1-1T1L
				18 mm	539185	VSVA-B-M52-MZD-A2-1T1L



Note

Further solenoid valves with switching position sensing can be ordered as distinct types. These are preconfigured with the required MO cover caps.

a Solenoid valve with switching position sensing, page 163



Note

The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Please contact Festo in the event of a malfunction.

Ordering data – Intermediate plate for switchable pilot air for VTSA/VTSA-F

Ordering data	Code	Description	Part no.	Туре	
ressure switch for	r intermediat	te plate	!	<u> </u>	
	WL	Mechanical pressure switch for switchable pilot air supply (only in comwith intermediate plate ZO), with plug M12x1, 4-pin	bination 8000033	SPBA-P2R-G18-W-M12-0.25X	
	WH	Electrical pressure switch for switchable pilot air supply, switching out (only in combination with intermediate plate ZO), with plug M12x1, 4-		SPBA-P2R-G18-2P-M12-0.25X	
onnecting cable fo	or connectio	n of pressure switches			
	GE	• Straight socket, M12x1, 5-pin • Straight plug, M12x1, 4-pin	8000208	NEBU-M12G5-K-0.5-M12G4	
onnecting cable fo	or the electri	ical connection of sensors for switching position sensing			
		• Straight socket, M8x1, 3-pin • Straight plug, M12x1, 3-pin		NEBA-M8G3-U-0.5-N-M12G3	
	GM	• Straight socket, M8x1, 3-pin 2.5 m • Open end, 3-core	8078223	NEBA-M8G3-U-2.5-N-LE3	
	GN	• Straight socket, M8x1, 3-pin • Open end, 3-core	8078224	NEBA-M8G3-U-5-N-LE3	
	GO	• Angled socket, M8x1, 3-pin • Open end, 3-core	8078230	NEBA-M8W3-U-2.5-N-LE3	
	GP	• Angled socket, M8x1, 3-pin • Open end, 3-core	8078231	NEBA-M8W3-U-5-N-LE3	
-	_	• Angled socket, rotatable, M8x1, 3-pin • Open end, 3-core	8001660	NEBU-M8R3-K-2.5-LE3	
	-	Angled socket, rotatable, M8x1, 3-pin Open end, 3-core	8001661	NEBU-M8R3-K-5-LE3	

Ordering data – Pilot air switching valve for VTSA/VTSA-F

N	Cover cap for manual override, non-detenting Cover cap for manual override, concealed	Pack of 10	Part no. 541010	VAMC-S6-CH				
			541010	VAMC-S6-CH				
			541010	VAMC-S6-CH				
V	Cover cap for manual override, concealed	Pack of 10						
			541011	VAMC-S6-CS				
	Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only)	Pack of 10	4105147	4105147 VAMC-B-S6-CTR				
override,	heavy duty							
- 1	Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR)	1 piece	1662543	АНВ-МЕВ-В				
Pneumatic connection accessories								
A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter Accessories a page: 242 or on the website via the individual search terms:								
i	ccessori ttings, b	heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only) override, heavy duty Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR) ccessories ttings, blanking plugs, silencers and ories can be found in the chapter Accessories a page: 242	heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only) Everride, heavy duty Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR) 1 piece 1 piece	heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only) verride, heavy duty Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR) 1 piece 1662543 ccessories ttings, blanking plugs, silencers and ories can be found in the chapter Accessories a page: 242 individual search terms:				



There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.


Datasheet - Pilot air switching valve for VTSA/VTSA-F-CB

- N - Flow rate 125 l/min

Pilot air switching valve width 18 mm

Voltage 24 V DC

Operating pressure
0.3 ... 1 MPa

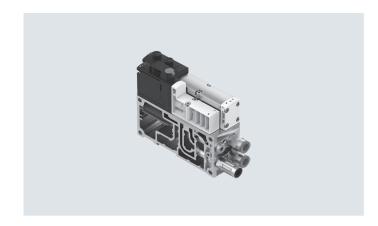

Description

Duct 14 of the valve terminal is supplied with pilot air via the pilot air switching valve. This can be used to realise the safety function "Protection against unexpected start-up".

The pilot air switching valve is always supplied with internal pilot air from the valve terminal.

The valve terminal can be operated with internal pilot air (from duct 1 of the valve terminal) or with external pilot air (external compressed air supply via duct 2).

The pilot air switching valve is actuated via an electromagnetic pilot control.

It can be switched on and off manually using the manual override. The manual override can be shut off manually or using the electrical pilot control.

The pilot air switching valve enables the pilot air supply to be verifiably switched on and off (sensor function) from duct 1 to 14 for the entire pressure zone or valve terminal.

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control system.

This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

More information and technical data

- 🖣 - Note

The pilot air switching valve can only be operated on the valve terminal VTSA/VTSA-F in combination with a right-hand end plate for external pilot air type VABE-S6-1RZ-.... Port 14 on the right end plate must then be sealed.

This information applies only for a single pressure zone.

Safety data				
Max. positive test pulse with logic 0	[µs]	2000		
Max. negative test pulse with logic 1	[µs]	1200		
Shock resistance		Shock test with severity level 2, to EN 60068-2-27		
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6		

Datasheet – Pilot air switching valve for VTSA/VTSA-F-CB

ocherat teemineat aata	technical data				
Design		Poppet valve			
Valve function		3/2-way closed, single solenoid			
Standard nominal flow rate [[l/min]	125			
Standard nominal flow rate [[l/min]	125			
for exhaust					
Reset method		Mechanical spring and pneumatic spring			
Sealing principle		Soft			
Actuation type		Electrical			
Overlap		Negative overlap			
Type of control		Piloted			
Mounting position		Any			
Flow direction		Not reversible			
Manual override		None (part no.: 8066575, 8066574, 8066571, 8066570)			
		Detenting, self-resetting via electrical control signal (part no.: 8066573, 8066572, 8066569, 8066568)			
_		Non-detenting (part no.: 8171467, 8171468, 8171469, 8171470)			
Pilot air supply		For pilot air switching valve: internal via valve terminal			
	ĺ	For the valve terminal: internal via valve terminal (duct 1) – (part nos.: 8066569, 8066568, 8066571, 8066570)			
		For the valve terminal: external via compressed air supply (duct 2) – (part nos.: 8066573, 8066572, 8066575, 8066574)			
Type of mounting		Via through-hole, on manifold sub-base			
MTTF subcomponent		443 years, pressure switch			
Width, manifold sub-base [[mm]	38 (for additional valve 18 mm)			
Ī	[mm]	46 (for additional valve 26 mm)			
Pneumatic connections, pilot air	r switching	z valve			
	1	Via the manifold sub-base of the valve terminal			
	3/5	Via the manifold sub-base of the valve terminal			
	2	G1/8			
	4	G1/8			
<u> </u>	14	Via the manifold sub-base of the valve terminal			
Pneumatic connections, addition	nal valve n	ecition			
	1	Via the manifold sub-base of the valve terminal			
- ' '	3/5	Via the manifold sub-base of the valve terminal			
	2/4	G1/8			
	2/4	G1/4			
	14	Via the manifold sub-base of the valve terminal			

Operating and environmenta	l conditions	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/ Pilot medium		Lubricated operation not possible
Operating pressure ²⁾	[bar]	310
	[MPa]	0.3 1
Pilot pressure	[bar]	310
	[MPa]	0.3 1
Ambient temperature2)	[°C]	_5 +50
Temperature of medium2)	[°C]	_5 +50
Corrosion resistance class CR	C ¹⁾	0

¹⁾ More information www.festo.com/x/topic/crc

²⁾ With an ambient temperature and a temperature of the medium from -5 °C to +5 °C and +40 °C to +50 °C, the maximum permissible operating pressure is 8 bar.


Datasheet - Pilot air switching valve for VTSA/VTSA-F-CB

Electrical data – Pilot air swi	tching valve	
Nominal operating voltage [V DC]		24
Permissible voltage fluctuations	[%]	±10
Electrical connection		Plug-in
Power consumption	[W]	1.6
Switching element function		N/C
Switching position sensing Via pressure switch, exhausted status		Via pressure switch, exhausted status
		Yellow LED, valve control
		Green LED, pressure switch, exhausted status
Duty cycle	[%]	100
Degree of protection		IP65

Materials	
Housing	Reinforced PA
Seals	NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

Connection and display components

Pilot air switching valve VSVA-BT-M32CS... with manifold sub-base

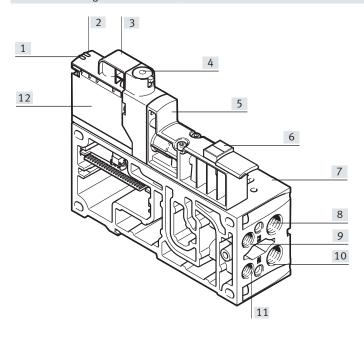

- 🖣 - Note


Detailed information on the manual override can be found in the user documentation.

- [1] Status LED for solenoid coil
- [2] Status LED for pressure switch
- [3] M12 connection (optional)
- [4] Manual override (MO) (optional)
- [5] Solenoid valve housing
- [6] Inscription label holder with additional fields for marking (ASCF-T-S6-Z)
- [7] Additional valve position
- [8] Working port (2) of the additional valve position
- [9] External compressed air supply port
- [10] Working port (4) of the additional valve position
- [11] Exhaust port
- [12] Pilot control

Datasheet – Pilot air switching valve for VTSA-F-CB

Valve fund	tion	
Terminal code	Circuit symbol	Description
СТ	(14)2 (2)1 3(4)	 Pilot air supply via duct 2 (external pilot air) of manifold sub-base Without manual override (MO)
СТ	12 (14)2 (2)1 3(4)	Pilot air supply via duct 2 (external pilot air) of manifold sub-base With manual override (MO)
AT	(14)2 (2)1 3(4)	Pilot air supply via duct 2 (external pilot air) of manifold sub-base Without manual override (MO)
AT	12 (14)2 (2)1 3(4)	Pilot air supply via duct 2 (external pilot air) of manifold sub-base With manual override (MO) Pilot air supply via duct 2 (external pilot air) of manifold sub-base
CS	(14)2 1 3(4)	Pilot air supply via duct 1 (internal pilot air) for the valve terminal's pressure zone (end plate/additional supply plate) Without manual override (MO)
CS	12 (14)2 1 3(4)	 Pilot air supply via duct 1 (internal pilot air) for the valve terminal's pressure zone (end plate/additional supply plate) With manual override (MO)
AS	(14)2 1 3(4)	 Pilot air supply via duct 1 (internal pilot air) for the valve terminal's pressure zone (end plate/additional supply plate) Without manual override (MO)
AS	12 (14)2 1 3(4)	Pilot air supply via duct 1 (internal pilot air) for the valve terminal's pressure zone (end plate/additional supply plate) With manual override (MO)

Datasheet – Pilot air switching valve for VTSA/VTSA-F-CB

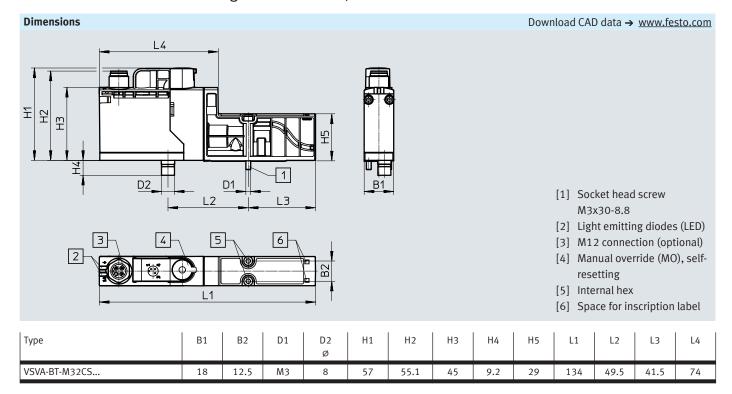

Datasheet – Pilot air switching valve for VTSA-F-CB

	Terminal code	Terminal code	Description		Operati	_		dard nominal rate2)	Wt. [g] 3)	Part no.	Туре
	VTSA-F-CB	VTSA/ VTSA-F			[MPa]	[bar]	[l/ min]	Exhausting [l/min]			
sole	enoid valve,	24 V DC, p	lug-in design								
		lenoid val	ve NC, external pilot air sup								
	СТ	_	Control plug-in, pressure switch plug-in, manual override (MO) self-resetting	18 mm	0.31	310	150	150	110	8066573	VSVA-BT-M32CS2-MYE-A2-1
	СТ	AT	Control plug-in, external M12 pressure switch, manual override (MO) self-resetting	18 mm	0.31	310	150	150	110	8066572	VSVA-BT-M32CS2-MYE-A2-1
	СТ	_	Control plug-in, pressure switch plug-in, manual override (MO) concealed	18 mm	0.31	310	150	150	110	8066575	VSVA-BT-M32CS2-MS-A2-1T
	СТ	AT	Control plug-in, external M12 pressure switch, manual override (MO) concealed	18 mm	0.31	310	150	150	110	8066574	VSVA-BT-M32CS2-MS-A2-1T
	СТ	-	Control plug-in, pressure switch plug-in, manual override (MO) non- detenting	18 mm	0.31	310	125	125	110	8171467	VSVA-BT-M32CS2-MH-A2-1T
	СТ	AT	Control plug-in, pressure switch plug-in, manual override (MO) non- detenting	18 mm	0.31	310	125	125	110	8171469	VSVA-BT-M32CS2-MH-A2-1T
	3/2-way so	lenoid valv	ve NC, internal pilot air sup	oly for the	e valve te	rminal		,			
	CS	_	Control plug-in, pressure switch plug-in, manual override (MO) self-resetting	18 mm	0.31	310	150	150	110	8066569	VSVA-BT-M32CS1-MYE-A2-1
	CS	AS	Control plug-in, external M12 pressure switch, manual override (MO) self-resetting	18 mm	0.31	310	150	150	110	8066568	VSVA-BT-M32CS1-MYE-A2-1
	CS	-	Control plug-in, pressure switch plug-in, manual override (MO) concealed	18 mm	0.31	310	150	150	110	8066571	VSVA-BT-M32CS1-MS-A2-1T
	CS	AS	Control plug-in, external M12 pressure switch, manual override (MO) concealed	18 mm	0.31	310	150	150	110	8066570	VSVA-BT-M32CS1-MS-A2-1T
	CS	_	Control plug-in, external M12 pressure switch, manual override (MO) non-detenting	18 mm		310	125	125	110	8171468	VSVA-BT-M32CS1-MH-A2-1T
	CS	AS	Control plug-in, external M12 pressure switch, manual override (MO) non-detenting	18 mm	0.31	310	125	125	110	8171470	VSVA-BT-M32CS1-MH-A2-1T

¹⁾ With an ambient temperature and temperature of medium of from -5 °C to +5 °C and 40 °C to 50 °C, the maximum permissible operating pressure is 0.8 MPA or 8 bar.


^{2) +/- 15%} to FN 942032

³⁾ Weight of pilot air switching valve without manifold sub-base

Datasheet – Pilot air switching valve for VTSA/VTSA-F-CB

Ordering data							
	Terminal code VTSA-F-CB	Terminal code VTSA/ VTSA-F	Description			Part no.	Туре
Manifold sub-	base for pilo	t air switchiı	ng valve				
	YB	-	For 2 valve positions (4 addresses) 1x valve position, 1x double solenoid valve, high flow	18 mm	434	8068913	VABF-S4-2HS-G18-CB-2T5
	YC	-	Hybrid manifold sub-base, width 18 and 26 mm For 2 valve positions (4 addresses) 1x valve position with CBUS communication, 1x double solenoid valve, high flow (with CBUS loop-through)	18 mm/26 mm	512	8068912	VABV-S4-12HS-G-CB-2T5
	-	XA	Hybrid manifold sub-base, width 18 and 26 mm For 2 valve positions (4 addresses)	18 mm/26 mm	512	8190411	VABV-S4-12HS-G-2T2

Function without sensor




Flow rate Pressurisation: 3000 l/min Exhausting: 3300 l/min











Description

12/14 7

With sensor

Function

The purpose of the soft-start valve is to slowly and safely build up the supply pressure in duct 1 of the valve terminal or to quickly exhaust it via duct 1. Switch-on takes place in two stages:

- First the working pressure for duct 1 gradually increases (the speed can be adjusted using a throttle screw).
- Once the working pressure in duct 1 reaches a previously set value, the soft-start valve switches to full operating pressure at duct 1 of the valve

The switching point for full operating pressure is set to 4 bar at the factory, but can be changed using an adjusting screw.

The full operating pressure is applied at duct 14 (pilot air) at all times. This pressure causes the valves on the valve terminal to immediately move to the required switching position, so an unspecified position is not possible.

Duct 1 of the valve terminal is exhausted via the soft-start valve's exhaust port only in the normal position, when the valve is not switched. The exhaust air can optionally be ducted with a QS fitting or using a silencer. A detenting manual override with self-reset via an electrical control signal is available for maintenance and service purposes.



When using "Protection against unexpected start-up": Protection against unexpected activation of the manual override (MO) must be guaranteed in all operating modes.

Diagnostics

The piston position of the softstart valve can be monitored by a sensor with integrated LED display. This sensor registers whether the valve has switched and thus whether the valve terminal is being supplied with supply air.

Pressure sensing via a pressure gauge (optional) is also possible. The soft-start valve can also be ordered with a sensor. A sensor cannot be retrofitted at a later date because of the calibration that is required.

Connecting cables with integrated LED display are provided for displaying the signal status.

Pilot air supply

The valve terminal can either be supplied with internal pilot air via the soft-start valve or with internal or external pilot air via the various end plate variants or the pilot air switching valves.

The pilot air supply for the valve terminal (internal/external) is determined by the seal between the manifold sub-base and the soft-start valve.

The scope of delivery of the softstart valve includes both the seal for internal pilot air supply (with drilled hole) and the seal for external pilot air supply (no drilled hole).

The soft-start valve itself is always supplied with internal pilot air.

Description

Creating pressure zones with a soft-start valve

The soft-start valve can be used for the pneumatic compressed air supply of the valve terminal or of a pressure zone. The soft-start valve can only be used as the sole compressed air supply component on valve terminals with one pressure zone or within a pressure zone.

If a soft-start valve in combination with a right end plate (code XP3) is chosen for a pressure zone, this pressure zone must have a supply plate with a blanking plug in duct 1 (code W).

When using a soft-start valve, a supply plate (with blanking plug in duct 1) is generally also required for this pressure zone to discharge the exhaust air (duct 3/5).

A supply plate is not required if the exhaust air (duct 3/5) in a pressure zone with soft-start valve can be discharged via the right end plate.

Constraints

Compressed air supply

There must be no other elements supplying compressed air in the pressure zone in which the softstart valve is being used.

Exhaust air

Exhaust air cannot be expelled via the soft-start valve. If it is being used in a pressure zone with duct 3/5 separate, an exhaust plate is required.

Pilot air supply

If the soft-start valve is used for internal pilot air supply (duct 14), there must be no other pilot air supply within the valve terminal.

Reverse operation

The soft-start valve is not approved for reverse operation.

Note

Setting options as well as drawings with descriptions of the components for the soft-start valve can be found in the user documentation.

The adjusting screws are freely accessible once they are fitted.

Safety data

•	
Conforms to standard	ISO 5599-2
Note on forced checking procedure	Switching frequency min. once a month
Max. positive test pulse [μs] with logic 0	25001)
Max. negative test pulse [μs] with logic 1	14001)
Shock resistance	Shock test with severity level 2, to EN 60068-2-27
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6

¹⁾ Values apply only to types with direct voltage 24 V DC

						1
	4-4-	1	techn		C~	
à	data	cal	techn	neral	GA	П

General technical data	
Design	Piston spool
Actuation type	Electrical
Sealing principle	Soft
Type of mounting	On sub-base, ISO size 1 to ISO 5599-2
Mounting position	Any
Valve function	Soft-start function
Manual override	Detenting, self-resetting via electrical control signal, normal position on top, a page 197
Reset method	Mechanical spring
Type of control	Piloted
Pilot air supply	Internal, external
Flow direction	Not reversible
Switching position sensing	Switching position with sensor

Standard nominal flow	rate II	/ mın I

Pressurisation	3000
Exhausting	3300

Operating and environmental conditions						
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]				
Notes on operating/ pilot medium		ubricated operation possible (in which case lubricated operation will always be required)				
Operating pressure	[bar]	212				
	[MPa]	0.2 1.2				
Switchover pressure	[bar]	4				
presetting	[MPa]	0.4				
Ambient temperature	[°C]	-5 +50				
Note on materials		RoHS-compliant				

Valve switching times [ms]		
Valve switching time	On	17
	Off	50

Electrical data for soft-start valve					
Electrical connection	Plug, type C to EN 175301-803, square design				
Nominal operating voltage [V]	24 DC				
Operating voltage range [V]	24 DC ±10%				
Characteristic coil data	24 V DC: 2.5 W				
Degree of protection to EN 60529	IP65, NEMA 4 (for all types of signal transmission when mounted)				

Electrical data for sensor				
Туре		SIEN-M12B-PS-S-L	SIEN-M12B-NS-S-L	
Electrical connection		Plug M12x1 to EN 60947-5-2, 4-pin		
Switching output		PNP	NPN	
Switching element function		N/O		
Signal status indication		Yellow LED		
Operating voltage range	[V DC]	10 30		
Residual ripple	[%]	±10		
Rated operating voltage	[V DC]	24		
Max. no-load current for	[mA]	10		
sensor				
Max. output current	[mA]	200		
Max. voltage drop	[V]	2		
Max. switching frequency	[Hz]	3000		
Short circuit current rating		Pulsed		
Reverse polarity protection f	or sensor	For all electrical connections		
Measuring principle		Inductive		
Switching position sensing		Switching position with sensor		

Materials		
	Soft-start valve	Manifold sub-base
Housing	Wrought aluminium alloy	Die-cast aluminium
Seals	NBR, HNBR	-
Screws	Galvanised steel	-

Example 1: Pressure zone with soft-start valve and pilot air supply

Internal, external pilot air supply

Requirements


- Compressed air supply via softstart valve
- Right end plate1): Blanking plug in duct 1

For internal pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "open" and
- Right end plate: Blanking plug in duct 14

For external pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "closed" and
- Pilot air supply via duct 14 in the right end plate

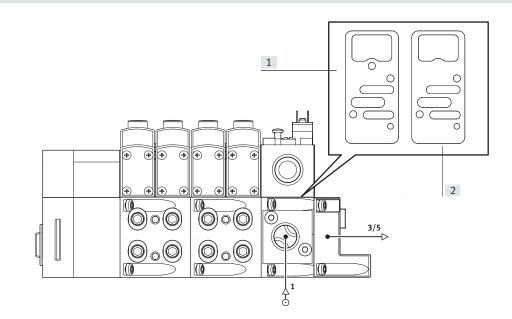

- [1] Seal for internal pilot air supply
- [2] Seal for external pilot air supply
- 1) A right end plate with pilot air selector cannot be used with this configuration, as it doesn't allow the exhaust air to be discharged

Example 2: Pressure zone with soft-start valve, supply plate and pilot air supply

Internal, external pilot air supply

Requirements


- Compressed air supply via softstart valve
- Supply plate: Blanking plug in duct 1
- Right end plate: blanking plug in duct 1, 3, 5 or
- Right end plate with pilot air selector

For internal pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "open" and
- Right end plate: blanking plug in duct 14 or
- End plate with coding (position 2, internal pilot air supply)

For external pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "closed" and
- Pilot air supply via duct 14 in the right end plate or
- End plate with coding (position 1, external pilot air supply)

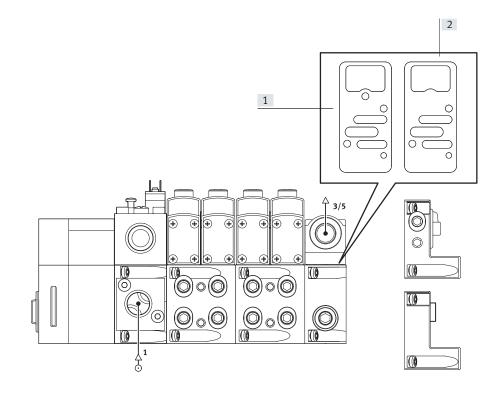


- [1] Seal for internal pilot air supply
- [2] Seal for external pilot air supply

Practical example 1: Valve terminal VTSA with CPX terminal (metal design) and soft-start valve

With internal pilot air (PP and XP2):

With external pilot air (PM and XP1):

Part no. 539217

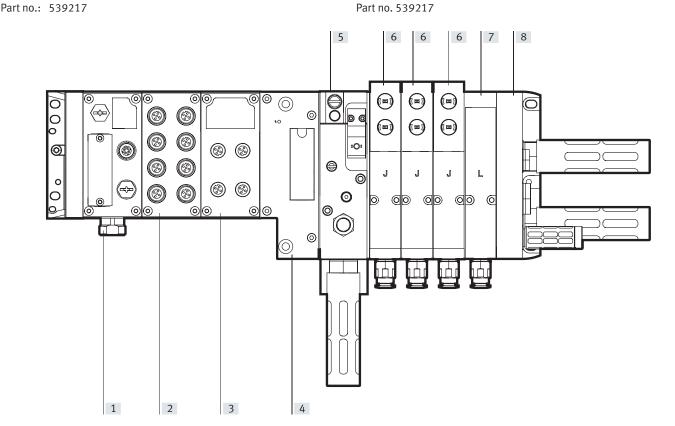

- [1] Fieldbus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- [5] Soft-start valve (PP – internal pilot air)
- [5] Soft-start valve (PM - external pilot air)
- [6] 5/2-way valve, double solenoid (J)
- [7] Vacant position (L)
- [8] Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14
- [8] Right end plate (XP1) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1

Selection with internal pilot air (PP and XP2):

Part no.: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA Pneumatic part: 44P-N-XP2-SMPP-BB-3JL+UGBP1


Selection with external pilot air (PM and XP1):

Part no.: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA Pneumatic part: 44P-N-XP1-SMPM-BB-3JL+UGBP1

Practical example 2: Valve terminal VTSA with CPX terminal (metal design), soft-start valve and switching position sensing With external pilot air (PM and XP2):

Part no.: 539217

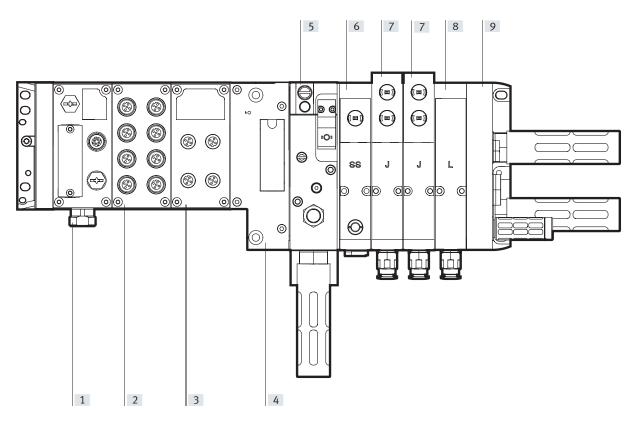

- [1] Fieldbus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- [5] Soft-start valve (PM external pilot air)
- [6] 5/2-way single solenoid valve, spring return, switching status indication with PNP sensor with 0.5 m connecting cable and push-in connector M12x1 (SS), and intermediate plate for switchable pilot air supply (ZO)
- [7] 5/2-way double solenoid valve (J), width 26 mm
- [8] Vacant position (L)
- [9] Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14


Selection with external pilot air (PM and XP2), solenoid valve with switching position sensing (SS) and intermediate plate for switchable pilot air supply (ZO)

Part no.: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA
Pneumatic part: 44P-N-XP2-SMPM-BB-SSZOJJL+UGCGBP1

Practical example 3: Valve terminal VTSA with CPX terminal (metal design), switching position sensing, soft-start valve and 2 pressure zones With external pilot air (PM and XP2)

Part no.: 539217

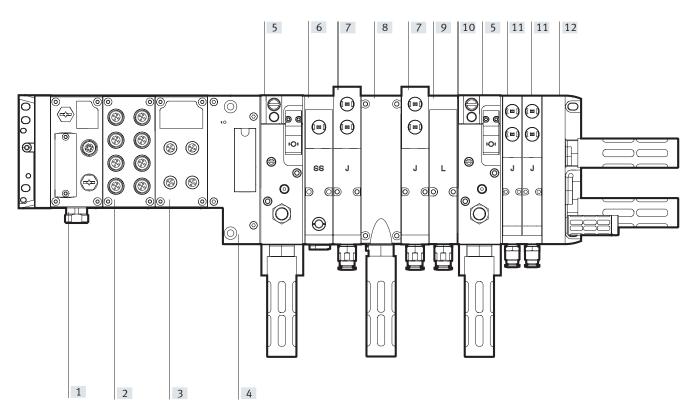

- [1] Fieldbus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- [5] Soft-start valve for one pressure zone (PM external pilot air)
- [6] 5/2-way single solenoid valve, spring return, switching status indication with PNP sensor with 0.5 m connecting cable and push-in connector M12x1 (SS), and intermediate plate for switchable auxiliary pilot air supply (ZO)
- [7] 5/2-way double solenoid valve (J), width 26 mm
- [8] Exhaust plate (W) for ducts 3/5
- [9] Vacant position (L)
- [10] Duct separation (S) 1, 3, 5
- [11] 5/2-way double solenoid valve (J), width 18 mm
- [12] Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14

Selection with external pilot air (PM and XP2), solenoid valve with switching position sensing (SS) and intermediate plate for switchable pilot air supply and 2 pressure zones

Part no.: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA

Pneumatic part: 44P-N-XP2-LSMPM-BWBSPMA-SSZOJJLJJ+UGCGBP1


Electrical connection of pneumatic components

The solenoid valve with switching position sensing (SS), with sensor connection M12 is connected to the CPX input module using an appropriate connecting cable in order to link the sensor signal to the CPX system.

The soft-start valve (PM – with sensor PNP) is connected to the CPX input module using an appropriate connecting cable (GC) in order to integrate the sensor signal into the CPX system.

A connecting cable (GBP1) to/ from the CPX output module is used to control the soft-start valve (PM). (Control signal)


Dimensions Soft-start valve Download CAD data → www.festo.com

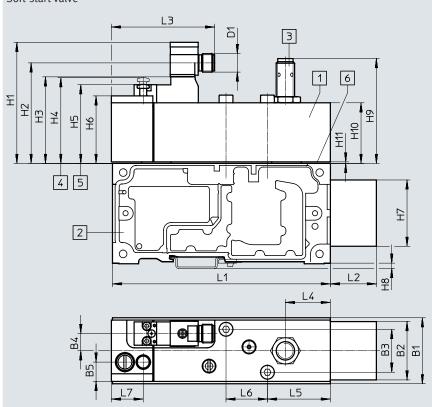


- [1] Soft-start valve, (port pattern to ISO 5599-2)
- [2] Manifold sub-base with connecting adapter (ducts 2 and 4), pneumatic connection G1/2
- [3] Soft-start valve optionally with sensor or protective
- [4] Manual override, normal position (unactuated)
- [5] Manual override, switching position (actuated)
- [6] Seal for internal or external pilot air supply of the valve terminal

Туре	B1	B2	В3	В4	B5	D1	L1	L2	L3	L4	L5	L6	L7
VABF-S6-1-P5A4-G12-4	43	36.5	28	11.2	12.6	M12x1	142	30	67.3	29.3	41	27	20.8
Туре	H1	H2	н	3	H4	H5	H6	н	,	Н8	H9	H10	H11
VABF-S6-1-P5A4-G12-4	78.9	65.5	56	5.4	55.9	51.5	44	41.	2	3.5	68.3	39.5	1

Seal 1) between soft-start valve and manifold sub-base



[1] With drilled hole, internal pilot air supply



[1] Without drilled hole, external pilot air supply

Туре	H1	L1
VABD-S6	40	84.8


¹⁾ Seals are included with the soft-start valve

Ordering data					
	Terminal code	Description	Weight [g]	Part no.	Туре
Soft-start valve, 24 V	DC DC				
	-	Without sensor output, pneumatic connection G1/2 (with seals for internal and external pilot air)	590	558230	VABF-S6-1-P5A4-G12-4-1
	PN	Seal for external pilot air (without drilled hole)			
	PQ	Seal for internal pilot air (with drilled hole)			
	-	With sensor output PNP, pneumatic connection G1/2 (with seals for internal and external pilot air)	605	557377	VABF-S6-1-P5A4-G12-4-1-P
	PM	Seal for external pilot air (without drilled hole)			
	PP	Seal for internal pilot air (with drilled hole)			
	-	With sensor output NPN, pneumatic connection G1/2 (with seals for internal and external pilot air)	605	558233	VABF-S6-1-P5A4-G12-4-1-N
	PK	Seal for external pilot air (without drilled hole)			
	PO	Seal for internal pilot air (with drilled hole)			
Manifold sub-base			1		
	_	Suitable for a soft-start valve (ports for ducts 2 and 4 are combined), pneumatic connection G1/2	570	556989	VABV-S6-1Q-G12


Accessories – Soft-start valve for VTSA/VTSA-F

Designation	Code	Description		Part no.	Туре
over cap					
	-	M12, for sealing the sensor opening	Pack of 10	165592	ISK-M12
lectrical connect	tion for soft-sta	rt valve			
	P1	 Angled socket, type C, 2-pin, with LED Straight plug M12x1, 2-pin 24 V DC 		188024	MSSD-EB-M12-MONO
	GB	Straight socket, M12x1, 5-pinOpen end, 4-core	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	-	 Angled socket, M12x1, 5-pin Open end, 4-core 	5 m	8078249	NEBA-M12W5-U-5-N-LE4
<u>-</u>	GG	Angled socket, type C, 3-pin, with LED	2.5 m	151688	KMEB-1-24-2.5-LED
	GH	Open end, 3-core	5 m	151689	KMEB-1-24-5-LED
	GJ	• 24 V DC, PVC	10 m	193457	KMEB-1-24-10-LED
	GK	Angled socket, type C, 3-pin	2.5 m	151690	KMEB-1-230AC-2.5
>	GL	Open end, 3-core 230 V AC, PVC	5 m	151691	KMEB-1-230AC-5
onnecting cable	for electrical co	onnection of the proximity switch			
	-	Straight socket, M12x1, 5-pinOpen end, 4-core	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	GC	 Angled socket, M12x1, 5-pin Open end, 4-core 	5 m	8078249	NEBA-M12W5-U-5-N-LE4
ilencer			1		
	U	Standard design, connecting thread (1 piece)	G1/2	6844	U-1/2-B
	A	Sintered design, connecting thread (pack of 10)	G1/2	1205863	AMTE-M-LH-G12
neumatic conne	rtion accessori	es	,		
selection of pos ther pneumatic	ssible fittings, b accessories car	olanking plugs, silencers and n be found in the chapter Accessories a page: 242			
other pneumatic or on the website	ssible fittings, b accessories car via the individ	olanking plugs, silencers and n be found in the chapter Accessories a page: 242			

Function Without manual override




With manual override



Flow rate
Pressurisation:
3000 l/min
Exhausting: 3300 l/min

- Module width 41 mm

Operating pressure
2 ... 10 bar
0.2 ... 1 MPa

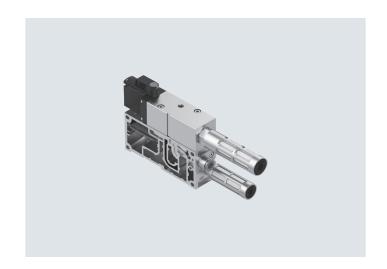

Description

Smart valve functions

The basic functions are the same as for the familiar soft-start valve. There is a variant with internal pilot air supply (code PM) and a variant without internal pilot air supply (code PN). In addition, the new smart soft-start valve has:

- An integrated pressure sensor for sensing the exhausted position
- A revised design of the manual override with protection against unintended actuation, as well as an automatic reset

Like the familiar soft-start valve, its purpose is to slowly and safely build up the supply pressure in duct 1 of the valve terminal or to quickly exhaust it.

Switch-on takes place in two stages:

• First the working process of

• First the working pressure for duct 1 gradually increases (the speed can be adjusted using a throttle screw).

 Once the working pressure in duct 1 reaches half the operating pressure, the softstart valve switches to full operating pressure at duct 1 of the valve terminal.

The switching point is permanently set at 50% of the operating pressure.
The full operating pressure is applied at duct 14 (pilot air) at all times. This pressure causes the valves on the valve terminal to immediately move to the required switching position, so an unspecified position is not possible.

Duct 1 of the valve terminal is exhausted via the soft-start valve's exhaust port only in the normal position, when the valve is not switched. The exhaust air can optionally be ducted with fittings for compressed air tubing with standardised O.D. or using a silencer.

A detenting manual override with self-reset via an electrical control signal is available for maintenance and service purposes.

Safety data		
Max. positive test pulse with logic 0	[µs]	2000
Max. negative test pulse with logic 1	[µs]	1200
Shock resistance		Shock test with severity level 2, to EN 60068-2-27
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6

Datasheet – Soft-start valve for VTSA-F-CB

General technical data		
Design		Piston spool valve
Grid dimension	[mm]	41
Valve size	[mm]	40
Overlap		Negative overlap
Actuation type		Electrical
Sealing principle		Soft
Type of mounting		On sub-base
Mounting position		Any
Valve function		soft-start and exhaust function
Manual override		Detenting, self-resetting via electrical control signal (part numbers 8067407 and 8067405), normal position on top a
		page 205
Manual override		None (part numbers 8161611, 8161610, 8067411 and 8067409)
Reset method		Mechanical spring
Type of control		Piloted
Pilot air supply		For soft-start valve: always internal via valve terminal
		For valve terminal: internal via soft-start valve (part nos. 8067407, 8067411)
		For valve terminal: internal, not via soft-start valve (part nos. 8067405, 8067409)
Flow direction		Not reversible
Pneumatic port 3		G1/2
MTTF, subcomponent		452 years, pressure switch

Standard nominal flow rate [l/	Standard nominal flow rate [l/min]		
Pressurisation	3000		
Note pressurisation	MPA: 1200		
	VTSA: 3000		
Exhausting	3300		
Note exhausting	MPA: 1600		
	VTSA: 3300		

Operating and environmental conditions				
Туре		VABF-S6-1-P5A4S1	VABF-S6-1-P5A4S2	
Operating medium	-	Compressed air to ISO 8573-1:2010 [7:4:4]		
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]		
Notes on operating/		Lubricated operation not possible		
pilot medium				
Pilot pressure	[bar]	310	2 10	
	[MPa]	0.3 1	0.2 1	
Operating pressure	[bar]	310	2 10	
	[MPa]	0.3 1	0.2 1	
Relative humidity		Max. 90% at 40 °C		
Ambient temperature	[°C]	−5 +50		
Temperature of medium	[°C]	-5 +50		
Storage temperature [°C]		-20 +60		
Corrosion resistance class CF	RC ¹⁾	0		


¹⁾ More information www.festo.com/x/topic/crc

Electrical data for soft-start valve	
Electrical control	Fieldbus
Electrical connection	Plug-in
Nominal operating voltage [V]	24 DC
Operating voltage range [V]	24 DC ±10%
Characteristic coil data	24 V DC: 1.6 W
Permissible voltage [%]	±10%
fluctuations	
Degree of protection to EN 60529	IP65 (for all types of signal transmission when mounted)
Pressure sensor	Integrated (plug-in)
Sensor evaluation	Internal
Switching element function	N/C
Switching position sensing	Via pressure switch, exhausted status
Signal status indication	Yellow LED, valve control
	Green LED, pressure switch, exhausted status
Duty cycle [%]	100

Materials		
	Soft-start valve	Manifold sub-base
Housing	Wrought aluminium alloy	Die-cast aluminium
Seals	NBR, HNBR	_
Screws	Galvanised steel	_
Note on materials	RoHS-compliant	

Connection and display components

Soft-start valve VABF-S6-1-P5A4-... with manifold sub-base

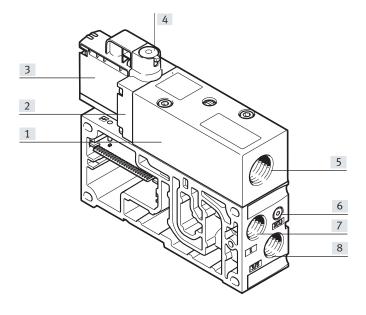


- [1] Basic valve housing
- [2] Intermediate plate
- [3] Pilot control
- [4] Manual override (MO) (optional)
- [5] Exhaust air port for duct 1
- [6] Pressure sensing for duct 1
- [7] Compressed air supply port
- [8] Exhaust air port for duct 3/5

- 🏺 - Note


Detailed information on the manual override can be found in the user documentation.

Datasheet – Soft-start valve for VTSA-F-CB


Valve func		
Terminal code	Circuit symbol	Description
РМ	(14)4 2(1) 12/14 1 3	Soft-start valve with pilot air supply Soft-start valve with manual override (MO)
PM	(14)4 2(1) 12/14	Soft-start valve with pilot air supply Soft-start valve without manual override (MO)
PN	2(1) 12/14 1 3	Soft-start valve without pilot air supply Soft-start valve with manual override (MO)
PN	2(1)	Soft-start valve without pilot air supply Soft-start valve without manual override (MO)

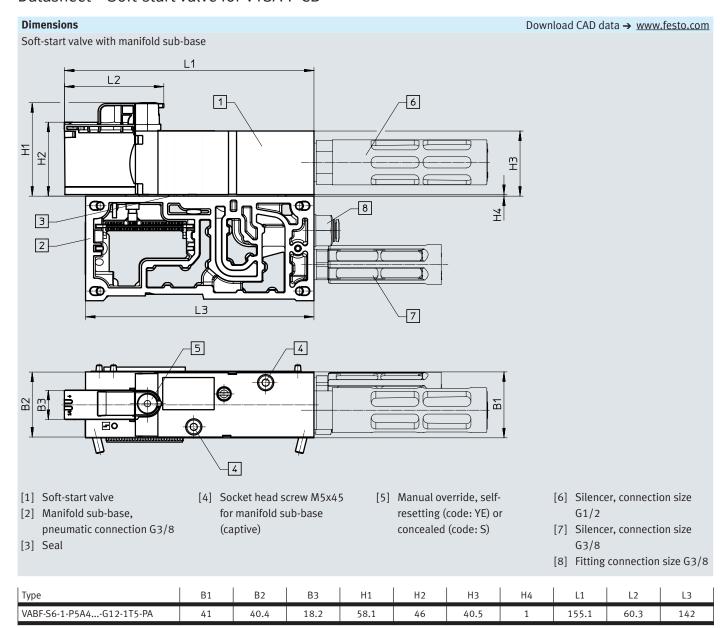

Seal 1) between soft-start valve and manifold sub-base



[1] With elongated hole, internal pilot air supply



[1] Without elongated hole, external pilot air supply

Туре	B1	L1
VABF-S6-1-P5A4Z	39	72.7

¹⁾ Seals are included with the soft-start valve

Accessories – Soft-start valve for VTSA-F-CB

Ordering data								
	Code	Description		1 ' "		Weight Part no.	Part no.	Туре
				[MPa]	[bar]	1		
Soft-start valve,	without	manifold sub-base						
	PM	PM Pilot pressure build-up from	Manual override (MO), self-resetting	0.3 1	3 10	466	8067407	VABF-S6-1-P5A4S1YE-G12-1T5-PA
		duct 1 (S1)	Manual override (MO), concealed	0.3 1	3 10	466	8067411	VABF-S6-1-P5A4S1S-G12-1T5-PA
	PN	No pilot pressure build-up from	Manual override (MO), self-resetting	0.2 1	2 10	466	8067405	VABF-S6-1-P5A4S2YE-G12-1T5-PA
		duct 1 (S2)	Manual override (MO), concealed	0.2 1	2 10	466	8067409	VABF-S6-1-P5A4S2S-G12-1T5-PA
Ordering data								
	Code	Description				Weight [g]	Part no.	Туре
Manifold sub-bas	se for so	oft-start valve						
	PV	With CBUS loop-through Sensor evaluation: internal Duct 3/5 combined Only in combination with pneumatic interface with voltage zone Pneumatic connection G3/8			zone	421	8068609	VABV-S6-1Q-G38-CB1-T5

Datasheet - Pneumatic interface for VTSA-F-CB





Description

Up to three safe voltage zones can be formed in the pneumatic part of the valve terminal using the pneumatic interface. There is also a variant available which uses a safe voltage zone as an external output.

The pneumatic interfaces (zone extensions) can be placed centrally in the pneumatic section of a valve terminal VTSA-F-CB and they extend the valve terminal by up to 3 additional (safe) voltage zones.

Function

Two different equipment levels:

- Creation of up to three safe internal voltage zones
- Creation of up to two safe internal voltage zones and one safe external voltage zone
- Integrated driver levels for addressing up to 24 valves within the first safe voltage zone
- Integrated diagnostics on short circuit and overload of the controlled valve coils
- Integrated diagnostics for load voltage undervoltage

Datasheet – Pneumatic interface for VTSA-F-CB

General technical data				
Туре		VABA-S6-1-X2-3V-CB-AL		
Max. no. of valve positions		12 with double solenoid valves		
		24 with single solenoid valves		
Product weight	[g]	1388		

Electrical data		
Туре		VABA-S6-1-X2-3V-CB-AL
Electrical connection		3x M12x1, A-coded
		5-pin
		Plug
		Via CPX
Operating voltage range	[V DC]	21.6 26.4
Intrinsic current consumption	[mA]	Typically 11 (operating voltage supply for electronics)
at nominal operating voltage		Typically 45 (load voltage supply for valves)
Max. power supply per channel	[A]	0.2
Max. total current per module	[A]	6
Nominal operating voltage	[V DC]	24
Degree of protection		IP65
		NEMA 4

Operating and environmental conditions				
Туре		VABA-S6-1-X2-3V-CB-AL		
Ambient temperature	[°C]	-5 50		

Materials	
Туре	VABA-S6-1-X2-3V-CB-AL
Note on materials	RoHS-compliant
Information on materials:	Die-cast aluminium
Housing	
Information on materials:	PA
Cover	
Corrosion resistance class CRC	$ 0^{1)}$
LABS (PWIS) conformity	VDMA24364-B1/B2-L

¹⁾ More information www.festo.com/x/topic/crc

Datasheet - Pneumatic interface for VTSA-F-CB

General technical data			
Туре		VABA-S6-1-X2-F1-CB-AL	VABA-S6-1-X2-F1-CB2-AL
Max. no. of valve positions		12 with double solenoid valves	12 with double solenoid valves
		24 with single solenoid valves	24 with single solenoid valves
Product weight	[g]	1542	1576

Electrical data			
Туре		VABA-S6-1-X2-F1-CB-AL	VABA-S6-1-X2-F1-CB2-AL
I/O output, function		-	Power supply, valve
I/O output, connection type		_	Plug
I/O output, connection		_	7/8" round plug connector
technology			
I/O output, number of pins		_	5
Electrical connection		Via CPX	Via CPX
Operating voltage range [V	V DC]	21.6 26.4	21.6 26.4
Intrinsic current consumption [n	mA]	Typically 15 El. w/o CPX-FVDA-P2	Typically 15 El. w/o CPX-FVDA-P2
at nominal operating voltage		Typically 25 El. with CPX-FVDA-P2	Typically 25 El. with CPX-FVDA-P2
Max. power supply per channel [A	A]	0.2	0.2
Max. total current per module [A	A]	2	2
Nominal operating voltage [V	V DC]	24	24
Degree of protection		IP65	IP65

Operating and environmental conditions			
Туре		VABA-S6-1-X2-F1-CB-AL	VABA-S6-1-X2-F1-CB2-AL
Storage temperature	[°C]	-20 60	-
Ambient temperature	[°C]	_	-5 50
Vibration resistant		Transport application test with severity level 2 to	Transport application test with severity level 2 to
		FN 942017-4 and EN 60068-2-6	FN 942017-4 and EN 60068-2-6
Shock resistance		Shock test with severity level 2 to FN 942017-5 and	Shock test with severity level 2 to FN 942017-5 and
		EN 60068-2-27	EN 60068-2-27

Materials		
Туре	VABA-S6-1-X2-F1-CB-AL	VABA-S6-1-X2-F1-CB2-AL
Note on materials	RoHS-compliant	
Information on materials: Sub-	Die-cast aluminium	
base		
Information on materials:	PA	
Cover		
Information on materials:	Steel	
Screws		
Information on materials:	NBR	
Seals		
Corrosion resistance class CRC	01)	
CE marking	To EU EMC Directive ²)	
	To EU RoHS Directive	

¹⁾ Corrosion resistance class CRC 0 to Festo standard FN 940070

No corrosion stress. Applies to small, visually unimportant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available on the market in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.

²⁾ For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet - Pneumatic interface for VTSA-F-CB

General technical data			
Туре		VABA-S6-1-X2-F2-CB-AL	VABA-S6-1-X2-F2-CB2-AL
Max. no. of valve positions		12 with double solenoid valves	12 with double solenoid valves
		24 with single solenoid valves	24 with single solenoid valves
Product weight	[g]	1562	1596

Electrical data			
Туре	VABA-S6-1-X2-F2-CB-AL	VABA-S6-1-X2-F2-CB2-AL	
I/O output, function	Safe digital output		
I/O output, connection type	Socket		
I/O output, connection technology	M12x1, A-coded to EN 61076-	2-101	
I/O output, number of pins	5		
I/O valve, function	_	Power supply, valve	
I/O valve, connection type	-	Plug	
I/O valve, connection	-	7/8" round plug connector	
technology			
I/O valve, number of pins	_	5	
Electrical connection	Via CPX		
Operating voltage range [V D	C] 21.6 26.4		
Intrinsic current consumption [mA] Typically 15 El. w/o CPX-FVDA-	Typically 15 El. w/o CPX-FVDA-P2	
at nominal operating voltage	Typically 25 El. with CPX-FVDA-	P2	
Max. power supply per channel [A]	0.2	0.2	
Max. total current per module [A]	2	2	
Nominal operating voltage [V D	C] 24	24	
Degree of protection	IP65	IP65	

Operating and environmen	Operating and environmental conditions			
Туре		VABA-S6-1-X2-F2-CB-AL	VABA-S6-1-X2-F2-CB2-AL	
Storage temperature	[°C]	-	-20 60	
Ambient temperature	[°C]	-5 50		
Vibration resistant		Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6	
Shock resistance		Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27	

Materials		
Туре	VABA-S6-1-X2-F2-CB-AL	VABA-S6-1-X2-F2-CB2-AL
Note on materials	RoHS-compliant	
Information on materials: Sub-base	Die-cast aluminium	
Information on materials: Cover	PA	
Information on materials: Screws	Steel	
Information on materials: Seals	NBR	
Corrosion resistance class CRC	01)	
CE marking	To EU EMC Directive ²)	
	To EU RoHS Directive	

¹⁾ Corrosion resistance class CRC 0 to Festo standard FN 940070


No corrosion stress. Applies to small, visually unimportant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available on the market in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Ordering data				
	Code	Description	Part no.	Туре
	ХВ	Pneumatic interface for extending by 3 external voltage zones	8152438	VABA-S6-1-X2-3V-CB-AL
	XC	Pneumatic interface for extending by 3 safe internal zones (PROFIsafe)	8152437	VABA-S6-1-X2-F1-CB-AL
	XD	Pneumatic interface for extending by 2 safe internal zones + 1 safe output (PROFIsafe)	8152436	VABA-S6-1-X2-F2-CB-AL
	PC	Pneumatic interface with additional power supply for extending by 3 safe internal zones (PROFIsafe)	8152435	VABA-S6-1-X2-F1-CB2-AL
	PD	Pneumatic interface with additional power supply for extending by 2 safe internal zones + 1 safe output (PROFIsafe)	8152434	VABA-S6-1-X2-F2-CB2-AL

²⁾ For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.


Function



Vacuum block width



Operating pressure 0.4 ... 0.8 MPa 4 ... 8 bar

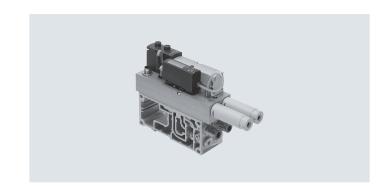

Description

The vacuum block can be integrated into the existing valve terminal VTSA/VTSA-F. To do this, the vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm.

The vacuum block is used in conjunction with a suction gripper to pick up, hold and place components. The suction gripper uses vacuum for picking up and holding.

Once the component has been positioned, it is released by an ejector pulse. This ejector pulse is created by pressurising the vacuum system so that the vacuum briefly collapses. The ejector pulse can be set.

- 🖣 - Note

The vacuum block can be operated in combination with the vertical stacking for pilot air switch-off on the valve terminal VTSA/VTSA-F.

Function

The vacuum block VABF-S4-1-V2B1... is used to generate a vacuum. The generated vacuum and a suction gripper produce a force which is used to grip and transport a workpiece. The supply of compressed air for vacuum generation is controlled by a solenoid valve. The vacuum is generated by actuating solenoid coil 12.

The setpoint value set at duct B for the generated vacuum is monitored via a vacuum sensor (with switching output). Vacuum generation reverts to a self-holding phase after reaching the setpoint value. The vacuum block controls the vacuum generation process independently within the range of the set switching points (air saving function).

The integrated solenoid valve is used to generate an ejector pulse by activating coil 14. The workpiece is thus safely released from the suction cup with connector and the vacuum is rapidly reduced. The length of the ejector pulse can be influenced by the duration of the electrical pulse. The strength of the ejector pulse is influenced by the adjustable flow control.

- Note

If the electrical or pneumatic supply fails while the valve is in the "generate vacuum" or "air saving" state, the valve moves to the "generate vacuum" position.

Operating mode of the air saving function (LS)

If the desired threshold value (1) (turn off suction) is reached for the vacuum, vacuum generation is automatically switched off.

Check valves prevent the reduction of the vacuum. However, leakages (e.g. due to rough workpiece surfaces) will slowly reduce the vacuum.

If the vacuum drops below the set threshold value (2) (turn on suction), vacuum generation is switched on automatically. Vacuum is generated until the set threshold value (1) (turn off suction) is reached again.

Threshold value to turn off suction (air saving function) (1):

The vacuum generator is switched off simultaneously when the output Out A is set.

The preset value is -700 mbar.

Threshold value to turn on suction (2):

The threshold value (2) should always be above the switching point of duct B (3) "vacuum sensing".

The gap between (2) and (3) should be at least 50 mbar.

- Note

Setting options and further instructions are described in the operating instructions and/or documentation VABF-S4-1-V2B1... on the Support Portal from Festo.

General technical data		
Valve function		5/3-way, pressurised
Design		Non-modular
Mounting position		Any
Nominal width of Laval	[mm]	2.0
nozzle		
(vacuum generation)		
Ejector characteristics		High vacuum, standard
Integrated functions		Ejector pulse valve, electric
		Flow restrictor
		On/off valve, electric
		Air-saving circuit, electric
		• Check valve
		Open silencer Vacuum switch
Silencer design		Open
Measured variable		Relative pressure
Measuring principle		Piezoresistive
Switching function		Threshold-comparator
Short circuit current rating		Yes
Reverse polarity protection		For all electrical connections
Inductive protective circuit		Adapted to MZ, MY, ME coils
· .		
Switching element function	[hor]	N/O
Threshold-value setting range	[bar]	-0.999 0 (recommended operating range: -0.950.05)
	[MPa]	-0.0999 0 (recommended operating range: -0.0950.005)
Hysteresis setting range	[bar]	-0.9 0
Davisar avandis saasivina blask	[MPa]	-0.09 0
Power supply, vacuum block Pneumatic supply for		Via own M12 plug
vacuum block		Via valve terminal VTSA/VTSA-F
Ejector pulse		Strength adjustable via flow control screw
Actuation type		Strength adjustable via now control screw
Solenoid valve		Electrically actuated
Vacuum block		Vacuum generation via Venturi nozzle
Type of actuation for		Piloted Piloted
solenoid valve		T HOLEG
Flow direction		Not reversible
Exhaust air function		Can be throttled (duct 3 and 5)
Type of mounting		Via through-hole, screwed onto manifold sub-base, width 26 mm
Manual override		Detenting, non-detenting, concealed
For vacuum generation		Yes, solenoid coil 12 (holding)
For ejector pulse		Yes, solenoid coil 14 (spring return), (only effective when power supply is switched off)
Signal status display, valve		LED
Pneumatic connections		
Supply	1, 3	Via the manifold sub-base of the valve terminal, width 26 mm
Exhausting	3/5	Via the modular silencer for vacuum block
Working port	2	Via the manifold sub-base of the valve terminal (QS push-in fitting – vacuum), G1/4
(vacuum port)		
Connection	4	Via the manifold sub-base of the valve terminal (sealed with blanking plug type B-1/4)

Technical data for pressure switch of vacuum block (delivery status)			
Duct A: air saving function	on		
Switching behaviour		Threshold-comparator	
Switching point	[mbar]	- 700	
	[MPa]	-0.07	
Hysteresis	[mbar]	200	
	[MPa]	0.02	
Switching characteristic		NO (normally open contact)	
Duct B: vacuum sensing			
Switching behaviour		Threshold-comparator	
Switching point	[mbar]	-400	
	[MPa]	-0.04	
Hysteresis	[mbar]	5	
	[MPa]	0.0005	
Switching characteristic		NO (normally open contact)	



Setting options for duct A and duct B and further instructions can be found on the Support Portal from Festo in the operating instructions and/or documentation VABF-S4-1-V2B1...

Electrical data		
Electrical connection		4-pin plug to ISO 15407-2 (vacuum block supplied with power separately, not via valve terminal)
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	21.6 26.4
Duty cycle	[%]	100
Max. output current	[mA]	50
Voltage drop	[V]	≤1.5
No-load current	[mA]	50 150 (dependent on the switching status of the solenoid coils)
Characteristic coil data	[V DC]	24
Power consumption	[W]	1.3
(Characteristic coil data)		
Overload protection		Available
Accuracy (full scale)	[% FS]	±3
Degree of protection to		IP65, NEMA 4 (for all types of signal transmission when mounted)
EN 60529		

Electrical connection1)				
2 1	Plug M12x1, 4-pin to EN 61076-2-101	Pin1	-+ 24 V DC (brown (BN))	Supply voltage
+ +		Pin2	– Out B (white (WH))	Switching output B (duct B)
+ +/		Pin3	– 0 V DC (blue (BU))	o V DC
3 4		Pin4	– Out A (black (BK))	Switching output A (duct A)

¹⁾ Max. permissible signal cable length: 5 m $\,$


Operating and environmenta	l conditions	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on the operating medium		Unlubricated operation
Operating pressure	[bar]	48
	[MPa]	0.4 0.8
Nominal operating pressure	[bar]	6
	[MPa]	0.6
Pressure measuring range	[bar]	-1 0
	[MPa]	-0.1 0
Negative pressure	[bar]	Up to approx. 0.9 (as a function of operating pressure)
	[MPa]	Up to approx. 0.09 (as a function of operating pressure)
Ambient temperature	[°C]	050
Temperature of medium	[°C]	050
Noise level LpA (at nominal operating pressure)	[dB(A)]	78

Materials	
Housing, jet nozzle	Wrought aluminium alloy
Screws	Galvanised steel
Seals	NBR
Plug housing	Nickel-plated die-cast zinc
Plug contacts	Gold-plated brass
Inspection window on pressure	PA PA
sensor	
Pressure sensor keypad	TPE-U
Note on materials	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Pressure ratios, air consumption and volumetric flow rate


Vacuum as a function of operating pressure

1 0.9 0.8 0.7 0.6 0.5 0.4 0.3 0.2 0.1 0-2 6 8 10 p1 [bar] 2 Air consumption as a function of operating pressure

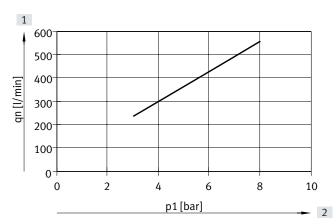

[1] Vacuum

- [2] Operating pressure
- [1] Air consumption
- [2] Operating pressure

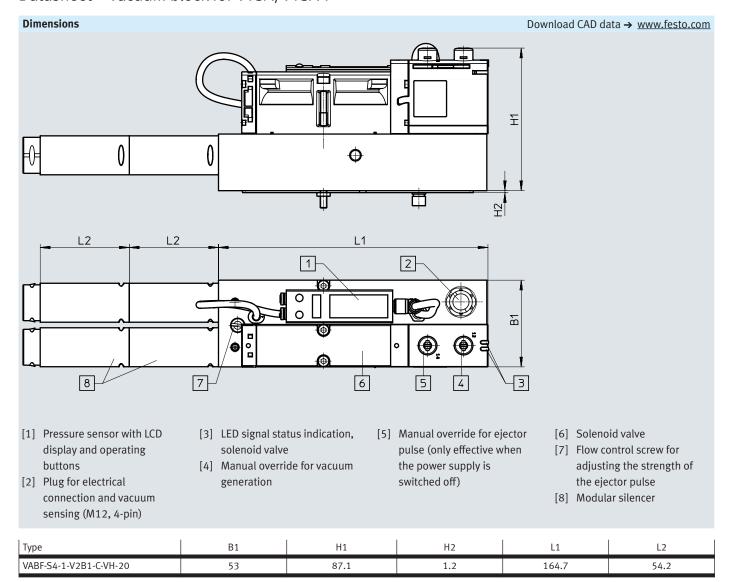

Ordering data	Code	Description		Part no.	Туре
acuum block					AL.
raccoum block	VB	Vacuum block for valve terminal VTSA/VTSA-F with air-saving function and adjustable ejector pulse	1120 g	571425	VABF-S4-1-V2B1-C-VH-20
Manifold sub-base					
	L ²⁾	For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4	26 mm	_1)	VABV-S4
e e	LK ²⁾	For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4, with small QS fitting	26 mm	_ 1)	VABV-S4
onnecting cable					
	-	Straight socket, M12x1, 5-pinOpen end, 4-core	2.5 m	8078239	NEBA-M12G5-U-2.5-N-LE4
	-	 Straight socket, M12x1, 5-pin Open end, 4-core 	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	GC	Angled socket, M12x1, 5-pin Open end, 4-core	5 m	8078249	NEBA-M12W5-U-5-N-LE4
Pneumatic connect A selection of possi		ries blanking plugs, silencers and			
other pneumatic ac or on the website v	cessories ca	an be found in the chapter Accessories a page: 242			

¹⁾ The manifold sub-base for use with the vacuum block can only be ordered via the valve terminal configurator and therefore doesn't have a separate part number.

²⁾ Code letter within the order code for a valve terminal configuration

Datasheet - Vacuum generator for VTSA-F-CB

- 【】 - Vacuum generator width 35 mm

- **** - Voltage 24 V DC

-**≜**- Op

Operating pressure 4 ... 8 bar 0.4 ... 0.8 MPa

Description

The vacuum generator VABF is designed for generating a vacuum.

The vacuum generator can be integrated into the existing valve terminal VTSA-F-CB.


The valve terminal supplies both compressed air and power.

A solenoid valve (solenoid coil 12, vacuum generation) controls the compressed air supply. Vacuum is generated using the Venturi principle when the vacuum generator is pressurised with compressed air.

The vacuum generator is used in conjunction with a suction gripper to pick up, hold and place components.

The suction gripper uses vacuum for picking up and holding. Once the component has been positioned, it is released by an ejector pulse. The ejector pulse can be set.

The ejector pulse is generated using the solenoid valve (solenoid coil 14, ejector pulse). The vacuum collapses if the vacuum system is briefly pressurised. The power ejector pulse variant (-AP) of the vacuum generator is a more energy- and air-saving option.

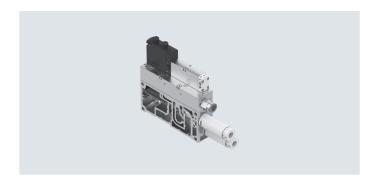

Extended functions with VTSA-F-CB

The VTSA-F-CB with serial communication provides the vacuum generator with extended functions:

- Opening and saving of up to four records (on a local computer)
- Teach-in functionality: recording homing runs, from gripping and holding the workpiece to setting it down. Configuration of switching points and monitoring.
- Preventive maintenance: measurement of all vacuum times, comparison with the homing run, warning message if a definable level of deviation is reached
- Switching air-saving function on/off
- Changing the vacuum parameters per record

- Locking the ejector pulse:
 - When the Uval of the adjacent voltage zone is switched off (voltage zone with safe shutoff within the valve terminal)
 - When there is a fault with the valve load voltage (e.g. undervoltage)
- Extended diagnostic functions via CBUS and display of status LED (yellow) or error LED (red)

- Note

In the event of an "emergency off" of the valve terminal (shutdown UVAL), the vacuum generator VABF remains in vacuum generation mode with air-saving function.

If there is a complete power failure (bus shutdown, USEN) when the vacuum generator is in "Generate vacuum" mode, the valve switches to the "Permanent suction" position.

Vacuum generation

The vacuum is generated according to the Venturi principle using the vacuum generator cartridges VN.

For the large sizes 20 and 30, two vacuum generator cartridges are used and connected in parallel.

For size 14, one vacuum generator cartridge is used (the second port is sealed with a blanking plug).

Vacuum generation is activated when the output signal "vacuum generation" is applied for at least 50 ms. Since the vacuum generation is pulse-controlled, vacuum is also generated after the output signal is deactivated.

Function overview

Monitoring process parameters

- Pressure value at vacuum port
- Limit values
- Evacuation time t_E

• Pressurisation time t_B

Process quality

Fault detection and diagnostic messages

- Supply voltage not reached
- Evacuation time exceeded
- Fault on air-saving function
- Vacuum value not reached
- Evacuation or pressurisation time exceeded
- Process quality below limit value
- · Teach-in error

Static teach-in

Switching points and cycle time can be configured using the FMT (Festo Maintenance Tool).

Dynamic teach-in

Calculating and optimising existing process sequences. Switching points and monitoring functions can be configured during operation.

Air saving function

- Is set at the factory.
- Can be switched off for "airpermeable workpieces" (otherwise there will be an unnecessarily high number of switching processes).

Manual override

Both solenoid coils, for vacuum generation and ejector pulse, can be switched manually using the manual override.

Pressure value (vacuum)

Pressure values are measured continuously between the vacuum port and filter. If the operating voltage of the vacuum generator is switched off, the values are reset.

Cycle time

The time from the start of the evacuation through ejection to the start of the new evacuation.

Evacuation and pressurisation time

The evacuation time tE is measured from the start of the evacuation until the switching point is reached.

The pressurisation time tB is

The pressurisation time tB is measured from the start of the pressurisation to the time at which the pressure value (vacuum) falls below –5 kPa.

Blanking plug

A vacuum generator V*20 or V*30 can be converted at a later date to V*14 using a blanking plug OASC-V1-P.

This makes it possible to reduce the air consumption or reduce the suction rate (e.g. for evacuation of smaller volumes).

Emergency stop function

If the emergency stop (switching off the load voltage supply) is triggered during vacuum generation, the vacuum generator remains in vacuum generation mode.

If the air saving function was activated, it remains active. If the parameter "ejector pulse interlock" is activated (set to inactive at the factory), no ejector pulse is triggered in the event of an emergency stop.

If there is a complete power failure (electronic supply voltage) during vacuum generation, the valve switches to "generate vacuum" position.

When the power supply is switched on again, the valve remains in the "generate vacuum" operating status until an ejection signal is received.

Error state

If communication between the controller and the vacuum generator is interrupted, a specific status is set.

The following settings are defined in this state:

- Output bit "vacuum generation" is set to 0.
- Output bit "ejector pulse" is set to 0.
- Parameter set is set to 0
- Air saving function is not affected

Additional characteristics

- Galvanic isolation between the vacuum generator VABF and valve terminal VTSA-F-CB
- 3 performance settings for vacuum generation (14, 20, 30)
- Integrated solenoid valve for vacuum generation (solenoid coil 12) and ejector pulse (solenoid coil 14)
- Air-saving ejector pulse with increased ejecting rate (power ejector pulse)
- Flow control screw to adjust the ejector pulse
- Integrated pressure sensor
- Integrated air-saving function
- Integrated strainer for filtering process air in order to protect the vacuum generator [-AP]
- Switching of the solenoid valve for vacuum generation with mechanical manual override
- Open silencer for reduced noise levels
- A check valve prevents purging of the vacuum if vacuum generation is interrupted

General technical data							
Туре		Functions with type code VABFA	Functions with type code VABFAP				
Valve function		5/3-way, pressurised					
Design		Non-modular					
Mounting position		Any					
Nominal width of Laval nozzle	14 [mm]	1.4					
(vacuum generation)	20 [mm]	2.0					
	30 [mm]	3.0					
Ejector characteristics • VABFV2B1VH		High vacuum, standard					
• VABFV2B1VL		High suction rate, standard					
Integrated functions		Ejector pulse, electrical Flow restrictor On/off valve, electric Air-saving circuit, electric Check valve Open silencer Vacuum switch	Power ejector pulse, electrical Flow restrictor On/off valve, electric Air-saving circuit, electric Check valve Open silencer Vacuum switch				
Silencer design		Open					
Measured variable		Relative pressure					
Measuring principle		Piezoresistive					
Switching function		Window comparator					
		Threshold-comparator					
Reverse polarity protection		For all electrical connections					
Switching element function		N/O					
Pneumatic supply for vacuum generator		Via valve terminal VTSA-F-CB					
Ejector pulse		Strength adjustable via flow control screw					
Solenoid valve actuation type		Electrically actuated					
Type of actuation for solenoid valve		Piloted					
Flow direction		Not reversible					
Type of mounting		Via through-hole, screwed onto manifold sub-base, width 35	5 mm				
Manual override		Non-detenting (only non-detenting: with accessories), deten	ting, covered (with accessories)				
For vacuum generation		Yes, solenoid coil 12 (holding)					
For ejector pulse		Yes, solenoid coil 14 (spring return), (only effective when po	wer supply is switched off)				
Pneumatic connections							
Supply	1	Compressed air is supplied via the valve terminal					
Exhausting	3	Via silencer (open)					
Working port	2	G3/8					
(vacuum port)							

Electrical data and sensors		
Operating voltage range (UB)	[V DC]	21.6 30
Nominal operating voltage	[V DC]	24
Duty cycle	[%]	100
No-load current	[mA]	30
Electrical control		Fieldbus
Electrical connection		Via CPX
Pressure measuring range	[bar]	-1 0
	[MPa]	-0.1 0
Accuracy (full scale)	[% FS]	±3
Reproducibility, switching value FS	[%]	
Degree of protection to EN 60529		IP65
Protection class to DIN EN 61140		III


Display and operation		
Display type		LED display, 2-digit
Threshold-value setting range	[kPa]	099
Hysteresis setting range	[kPa]	090
Setting options		Teach-in
		Via parameter sets
Sensor switching status		LED
indication		
Display range start value	[kPa]	0
Display range end value	[kPa]	99
Displayable unit(s)	[kPa]	Vacuum
Signal status indication,		LED
solenoid valve		

Operating and environmental c	onditions											
Type VABF		VH-14-A	VH-14-A	P VH-20-	VH-20-	AP VH-30-A	VH-30-A	P VL-14-	VL-14-A	P VL-20-A	VL-20-AP	
Operating medium		Compres	sed air to IS	0 8573-1:	2010[7:4:4	4]						
Note on operating/pilot medium		Lubricate	ed operation	not possil	ole							
Pilot pressure pS	[bar]	4 10										
	[MPa]	0.4 1										
Operating pressure pB	[bar]	4 8										
	[MPa]	0.4 0.8	3									
Nominal operating pressure	[bar]	6										
pBnom	[MPa]	0.6										
Operating pressure for max.	[bar]	4		4		6		4	4			
suction rate	[MPa]	0.4		0.4	0.4		0.6		0.4		0.5	
Operating pressure for max.	[bar]	4		4	4		6		_			
vacuum pumax	[MPa]	0.4		0.4	0.4		0.6		_			
Max. vacuum pVmax	[kPa]	92						_		_		
Max. suction rate with respect to atmosphere	[l/min]	51		99	99		167		91			
Pressurisation time at nominal operating pressure	[s]	0.2	0.3	0.2	0.3	0.2	0.25	0.2	0.25	0.2	0.25	
Noise level LpA (at nominal operating pressure)	[dB(A)]	70	-	73	•	75		62		61		
Ambient temperature tamb	[°C]	-5 +50)			<u>'</u>						
Temperature of medium tmed	[°C]	-5 +50)									
CE marking (see declaration of		To EU EN	IC Directive									
conformity)												
Certification		RCM										
Corrosion resistance class CRC ¹⁾)	0										

¹⁾ More information www.festo.com/x/topic/crc

Materials	
Housing, jet nozzle, blanking plug	Wrought aluminium alloy
Adjusting screw	High-alloy stainless steel
Screws	Steel
Vacuum generator seals	NBR, HNBR
Blanking plug seals	NBR
Plate	Die-cast aluminium
Female nozzle	POM
Silencer	PU foam, POM
Note on materials	RoHS-compliant (vacuum generator and blanking plug)

Connection and display components

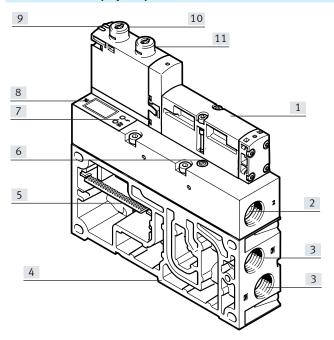

- [1] Solenoid valve VSVA
- [2] Vacuum port G3/8
- [3] Port for silencer UOM-3/8 [VH/L-14 (1x) and VH-20 (2x)]
- [4] Manifold sub-base for valve terminal VTSA-F-CB (pneumatic and electric)
- [5] Electrical link to valve terminal VTSA-F-CB
- [6] Flow control screw for adjusting the strength of the ejector pulse
- [7] The status LED (yellow) indicates the operating status of the vacuum generator and displays warnings in the event of a process fault
- [7] The error LED (red) indicates the status of the CBUS connection and displays errors
- [8] The 7-segment display (2-digit blue LED display) shows the pressure value (vacuum) in kPa
- [9] LED switching status indication for solenoid valve
- [10] Manual override for vacuum generation
- [11] Manual override for ejector pulse

Diagnostics and monitoring

The vacuum generator has monitoring functions that enable malfunctions or faults to be detected at an early stage during operation.

The following diagnostic functions are possible:

220

- Monitoring tE (evacuation time), reference via teach-in
- Monitoring tB (pressurisation time), reference via teach-in
- Monitoring air consumption via vacuum drop rate VDR (process

quality) when air saving function is active (tLS)

Definition of diagnostic levels			
Status	Normal operation	Warning	Faults
Definition	Device is OK	Outside the specification	Malfunction

Operating status	es of the vacuum g	enerator	
Actuation			
Solenoid coil 12	Solenoid coil 14	Function/operating status	Comment
0	0	Normal position	No actuation or status after the end of the "ejection" signal/the "pressurisation" function
		Generating vacuum	Operating status after failure of the pilot air supply or the electrical supply of the vacuum generator (self-latching loop)
1	0	Generating vacuum	Pulse actuation with self-latching loop
0	1	Pressurisation (ejector pulse)	Accelerated vacuum reduction
1	1	Saving air (air saving function)	Maintain vacuum (valve mid-position)

Electrical and pneumatic status changes		
Status change	Operating status before status change	Operating status after status change
Failure/deactivation of the electronics supply or the pilot air supply of the vacuum	Generating vacuum	Generating vacuum (The valve spool remains in the "generate vacuum" position)
generator	Saving air	Generating vacuum
		(The mechanical spring pushes the valve spool into the "generate
		vacuum" position)
	Pressurisation	Normal position1)
	Normal position1)	Normal position1)
Emergency stop/switch-off of the load	Generating vacuum	Generating vacuum
voltage supply	Saving air	Generating vacuum
		(vacuum is maintained)
	Pressurisation	Normal position or function is interrupted2)
	Normal position1)	Normal position1)

- 1) Normal position means the vacuum block is not in the "generate vacuum", "air saving" or "ejection" operating status
- 2) Parameter "ejector pulse interlock" must be active




If the compressed air or power supply to the valve terminal fails, this will result in the following statuses:


- 1. Compressed air failure:
- No vacuum can be generated, even if the valve is in the "generate vacuum" position.
- No ejector pulse can be generated, even if the valve is in the "ejection" position.
- 2. Power supply failure to the valve terminal:
- If both solenoid coils are de-energised at the same time, the valve switches to permanent suction because of the pilot air volume still present and remains in this state.

Circuit symbols, vacuum generator

VABF...V2B1...A

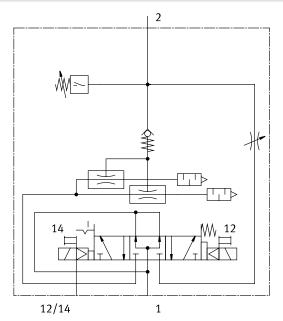


VABF...V2B1...AP

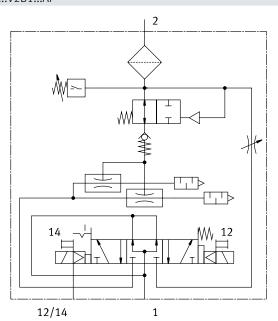


The vacuum generator is supplied internally via duct 1 of the manifold sub-base of the valve terminal. The pilot air is supplied internally via duct 12/14 of the manifold sub-base of the valve terminal.

Pressure ratios, negative pressure pu as a function of operating pressure p1

VH-1 4/20/30

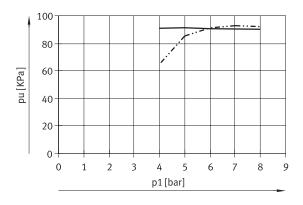

VL-14/20

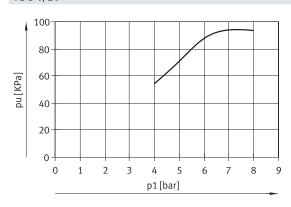


VH-14/20

---- VH-30


VL-14/20

Pressure ratios, evacuation time tevac as a function of negative pressure pu and operating pressure 4 bar for 1 l volume

VH-1 4/20/30: t_{evac(p1)}

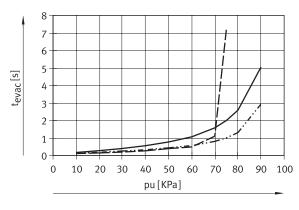

VL-1 4/20: t_{evac(p1)}

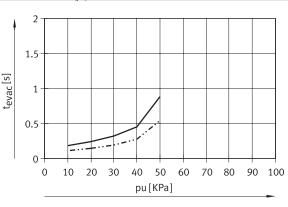


VH-14

VH-30

VL-14

Pressure ratios, air consumption qn as a function of operating pressure p1

V...-14/20/30

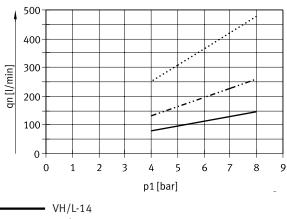



------ VH/L-20

--- VH-30

Pressure ratios, suction rate qns as a function of negative pressure pu, p1 and operating pressure 6 bar

VH-1 4/20/30

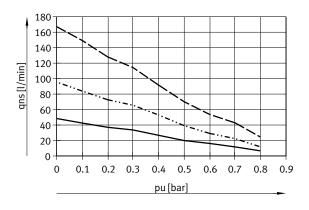

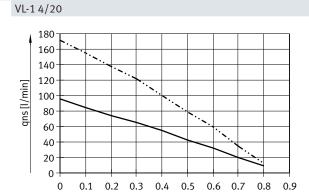

pu [bar]


VH-14
----- VH-20
---- VH-30


VL-14 VL-20


Dimensions

Download CAD data → www.festo.com

Vacuum generator Laval nozzle 2.0 with high negative pressure

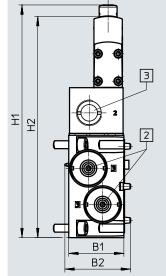

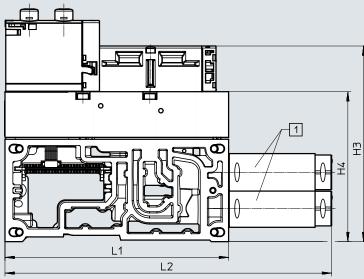

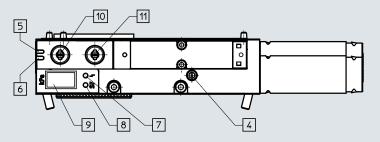

- [1] Silencer UOM-3/8
- [2] Exhaust port G3/8
- [3] Vacuum port G3/8
- [4] Flow control screw for adjusting the strength of the ejector pulse
- [5] LED switching status indication for solenoid valve ejector pulse
- [6] LED switching status indication for solenoid valve vacuum generation
- [7] Fault LED (red)
- [8] Status LED (yellow)
- [9] 2-digit 7-segment display (blue LEDs) for vacuum
- [10] Manual override for vacuum generation, non-detenting/ detenting
- [11] Manual override for ejector pulse, non-detenting/ detenting


Туре	B1	B2	H1	H2	Н3	H4	L1	L2
VABF-S4-2-V2B1-G38-CB-VH-20-A	35	41.7	147.7	140.4	124.2	95.2	142	207.4




Silencer UOM-3/8, seal VABD-S6-1-C and screws for manifold subbase are included with the order for the vacuum generator. If required, the silencer extension UOMS-3/8 can be ordered separately.


zatasireet vacaam generator ioi visit


Vacuum generator Laval nozzle 3.0 and Laval nozzle 2.0 with high suction rate



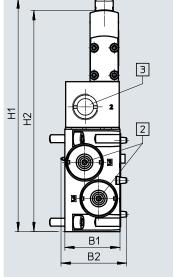

Dimensions

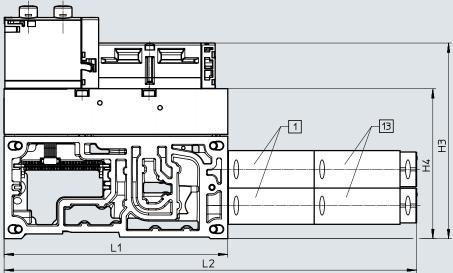

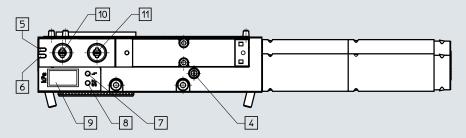

- [1] Silencer UOM-3/8
- [2] Exhaust port G3/8
- [3] Vacuum port G3/8
- [4] Flow control screw for adjusting the strength of the ejector pulse
- [5] LED switching status indication for solenoid valve ejector pulse
- [6] LED switching status indication for solenoid valve vacuum generation
- [7] Fault LED (red)
- [8] Status LED (yellow)
- [9] 2-digit 7-segment display (blue LEDs) for vacuum
- [10] Manual override for vacuum generation, non-detenting/detenting
- [11] Manual override for ejector pulse, non-detenting/ detenting
- [13] Silencer extension UOMS-3/8

Туре	B1	B2	H1	H2	Н3	H4	L1	L2
VABF-S4-2-V2B1-G38-CB-VL-20-A	25	41.7	1477	1404	124.2	05.2	142	2(1.0
VABF-S4-2-V2B1-G38-CB-VH-30-A	35	41.7	147.7	140.4	124.2	95.2	142	261.9





Silencer UOM-3/8, seal VABD-S6-1-C and screws for manifold subbase are included with the order for the vacuum generator. If required, the silencer extension UOMS-3/8 can be ordered separately.

Dimensions

Vacuum generator Laval nozzle 1.4

Download CAD data → www.festo.com

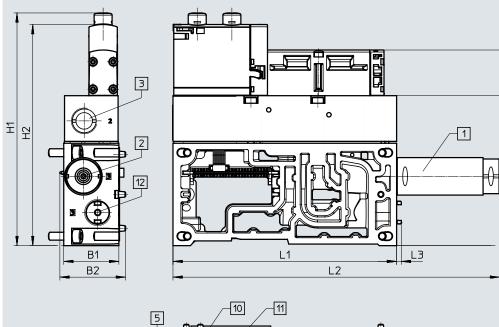

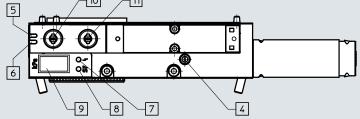

- [1] Silencer UOM-3/8
- [2] Exhaust port G3/8
- [3] Vacuum port G3/8
- [4] Flow control screw for adjusting the strength of the ejector pulse
- [5] LED switching status indication for solenoid valve ejector pulse
- [6] LED switching status indication for solenoid valve vacuum generation
- [7] Fault LED (red)
- [8] Status LED (yellow)
- [9] 2-digit 7-segment display (blue LEDs) for vacuum
- [10] Manual override for vacuum generation, non-detenting/detenting
- [11] Manual override for ejector pulse, non-detenting/ detenting
- [12] Screw-in blanking plug (max. tightening torque 4 Nm)

Туре	B1	B2	H1	H2	Н3	H4	L1	L2	L3
VABF-S4-2-V2B1-G38-CB-VL-14-A	25	41.7	147.7	140.4	124.2	95.2	142	207.4	2
VABF-S4-2-V2B1-G38-CB-VH-14-A	33	41.7	147.7	140.4	124.2	95.2	142	207.4)



Silencer UOM-3/8, seal VABD-S6-1-C and screws for manifold subbase are included with the order for the vacuum generator. If required, the silencer extension UOMS-3/8 can be ordered separately.

	Terminal code	Description	Weight [g]	Part no.	Туре
/acuum generator	for VTSA-F-CB,	with integrated sensor			
	With high	suction rate			
	II	Laval nozzle, 1.4 mm	915	8088779	VABF-S4-2-V2B1-G38-CB-VL-14-A
	IIPH	Laval nozzle, 1.4 mm with power ejector pulse	930	8088781	VABF-S4-2-V2B1-G38-CB-VL-14-AP
	IV	Laval nozzle, 2.0 mm	955	8067141	VABF-S4-2-V2B1-G38-CB-VL-20-A
	IVPH	Laval nozzle, 2.0 mm with power ejector pulse	970	8067144	VABF-S4-2-V2B1-G38-CB-VL-20-AP
	With high	ı vacuum			
	I	Laval nozzle, 1.4 mm	915	8088778	VABF-S4-2-V2B1-G38-CB-VH-14-A
	IPH	Laval nozzle, 1.4 mm with power ejector pulse	930	8088780	VABF-S4-2-V2B1-G38-CB-VH-14-AP
	III	Laval nozzle, 2.0 mm	920	8067140	VABF-S4-2-V2B1-G38-CB-VH-20-A
	IIIPH	Laval nozzle, 2.0 mm with power ejector pulse	940	8067143	VABF-S4-2-V2B1-G38-CB-VH-20-AP
	V	Laval nozzle, 3.0 mm	955	8067142	VABF-S4-2-V2B1-G38-CB-VH-30-A
	VPH	Laval nozzle, 3.0 mm with power ejector pulse	970	8067145	VABF-S4-2-V2B1-G38-CB-VH-30-AP
ilencer extension			1		
Sitericer extension	-	Can be attached to enclosed silencer UOM and secured in place.	17.5	538437	UOMS-3/8
lanking plug					
	-	With connecting thread G3/8	23	8068144	OASC-V1-P
		(The blanking plug can be used to subsequently convert an			
مرالراق		existing vacuum generator V20 to a vacuum generator			
		V14, or a vacuum generator V30 to a vacuum generator V20.)			
neumatic connec	tion accessorie	S			
•		anking plugs, silencers and be found in the chapter Accessories a page: 242			
r on the website	via the individu	al search terms:			
ternet → connec	ction technolog	y, silencer, blanking plug			

- [] - Valve width to ISO 15407-2

- 18 mm
- 26 mm to ISO 5599-2
- 42 mm
- 52 mm

Voltage 24 V DC 110 V AC



Flow rate

Width 18 mm: up to

600 l/min

Width 26 mm:

up to 1200 l/min

Width 42 mm: up

to 1500 l/min

Width 52 mm

up to 3400 l/min

General technical data

Design	Piston spool valve			
Sealing principle	Soft			
Actuation type	Electrical			
Type of control	Piloted			
Exhaust function, can be throttled	Via individual sub-base			
Lubrication	Lifetime lubrication		-	
Type of mounting	Screwed onto sub-base		-	
Valve	Screwed via through-hole			
 Individual sub-base 				
Mounting position	Any			
Manual override	Detenting, non-detenting, cor	ncealed		
Pneumatic connections – Threaded	 connection			
and to	1.5	1	1	

Pneumatic connections – Threaded connection						
Width		18 mm	26 mm	42 mm	52 mm	
Pneumatic connection		Via E-box				
Supply port	1	G1/8	G1/4	G3/8	G1/2	
Exhaust port	3/5	G1/8	G1/4	G3/8	G1/2	
Working ports	2/4	G1/8	G1/4	G3/8	G1/2	
External pilot air supply port	14	M5	G1/8	G1/8	G1/8	
Pilot exhaust air port	12	M5	G1/8	G1/8	G1/8	

Operating and environmental conditions, individual sub-base

Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/		Lubricated operation possible (in which case lubricated operation will always be required)
Pilot medium		
Operating pressure	[bar]	-0.9 +10
	[MPa]	-0.09 +1
Ambient temperature	[°C]	_5 +50
Certification		c UL us - Recognized (OL)
CE marking (see declaration o	f	To EU Low Voltage Directive (only for 110 V AC coils, not for variants with round plug M12)
conformity)		To EU Explosion Protection Directive (ATEX, EX1E1)) (for variants with round plug M12 only)
		To EU RoHS Directive
UKCA marking (see declaration	n of	To UK EMC regulations
conformity)		To UK explosion regulations
		To UK RoHS regulations
ATEX category for gas		II 3G (EX1E ¹⁾)
Type of (ignition) protection		Ex ec IIC T3 Gc X (EX1E ¹)
for gas		
Explosion-proof ambient	[°C]	−5 +50 (EX1E¹)
temperature		
Explosion protection certificat	ion	EPL Gc (GB)
outside the EU		

¹⁾ EX1E certification for installation in a housing

²⁾ For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads. If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Standard nominal flow rate of valve/individual sub-base [l/min]

Valve function (with valve code)	Width 18 mm		Width 26 mm			
	Valve	Valve on individual subbase	Valve	Valve on individual subbase		
5/2-way double solenoid (B52)	750	600	1400	1200		
5/2-way double solenoid with dominant signal (D52)	750	600	1400	1200		
5/2-way single solenoid, pneumatic spring (M52A)	750	600	1400	1200		
5/2-way single solenoid, mechanical spring (M52M)	750	600	1400	1200		
5/3-way closed (P53C)	700	550	1400 ¹⁾ 700 ²⁾	1200 ¹⁾ 700 ²⁾		
5/3-way exhausted (P53E)	700 ¹⁾ 330 ²⁾	500 ¹⁾ 330 ²⁾	1400 ¹⁾ 700 ²⁾	1200 ¹⁾ 700 ²⁾		
5/3-way pressurised (P53U)	700 ¹⁾ 330 ²⁾	500 ¹⁾ 330 ²⁾	1400 ¹⁾ 700 ²⁾	1200 ¹⁾ 700 ²⁾		
5/3-way, exhausted, switching position 14 detenting (P53ED)3)	-	390 ¹⁾ 310 ²⁾	1400 ¹⁾ 700 ²⁾	1200 ¹⁾ 700 ²⁾		
5/3-way, exhausted, switching position 12 detenting (P53EP)3)	-	390 ¹⁾ 320 ²⁾	1400 ¹⁾ 700 ²⁾	1200 ¹⁾ 700 ²⁾		
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)3)	-	380 ¹⁾ 360 ²⁾	700 ¹⁾ 700 ²⁾	700 ¹⁾ 700 ²⁾		
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)3)	-	400	-	900 ¹⁾ 840 ²⁾		
2x3/2-way single solenoid, closed (T32C)	600	500	1250	1100		
2x3/2-way single solenoid, open (T32U)	600	500	1250	1100		
2x3/2-way single solenoid, open/closed (T32H)	600	500	1250	1100		
2x3/2-way single solenoid, closed (T32N)	600	500	1250	1100		
2x3/2-way single solenoid, open (T32F)	600	500	1250	1100		
2x3/2-way single solenoid, open/closed (T32W)	600	500	1250	1100		
2x2/2-way single solenoid, closed (T22C)	700	500	1350	1100		
2x2/2-way single solenoid, closed (T22CV)	700	500	1350	1100		

¹⁾ Switching position

²⁾ Mid-position

³⁾ The valve functions P53AD, P53BD, P53ED, P53EP are only available in the 24 V DC version. Values only apply to 24 V DC.

5/3-way pressurised (P53U)

5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)3)

2x3/2-way single solenoid, open/closed (T32H)

2x3/2-way single solenoid, open/closed (T32W)

2x3/2-way single solenoid, closed (T32C)

2x3/2-way single solenoid, open (T32U)

2x3/2-way single solenoid, closed (T32N)

2x2/2-way single solenoid, closed (T22C)

2x3/2-way single solenoid, open (T32F)

Datasheet - Valves on individual sub-base

Standard nominal flow rate of valve/individual sub-base [l/min]

Valve function (with valve code) Width 42 mm Width 52 mm Valve Valve on individual sub-Valve Valve on individual base sub-base 5/2-way double solenoid (B52) 1500 3400 2000 4000 5/2-way double solenoid with dominant signal 3400 2000 1500 4000 5/2-way single solenoid, pneumatic spring (M52A) 2000 1500 4000 3400 5/2-way single solenoid, mechanical spring (M52M) 2000 1500 4000 3400 5/3-way closed (P53C) 1900¹⁾ 1400¹⁾ $3600^{1)}$ $3200^{1)}$ 950²⁾ 1700²⁾ 1700²⁾ 800²⁾ 5/3-way exhausted (P53E) 1900¹⁾ 1400¹⁾ 3600¹⁾ 3200¹⁾ 950²⁾ $800^{2)}$ $1700^{2)}$ 1700²⁾

1400¹⁾

 $1400^{1)}$

 $700^{2)}$

1200

1200

1200

1200

1200

1200

1400

1400

8002)

3600¹⁾

1700²⁾

3000¹⁾

900²⁾

3000

3000

3000

3000

3000

3000

4000

3200¹⁾

1700²⁾

2600¹⁾

900²⁾

2600

2600

2600

2600

2600

2600

3400

 $1900^{1)}$

950²⁾

1700¹⁾

700²⁾

1600

1600

1600

1600

1600

1600

1600

1600

2)	x2/2-way single solenoid, closed (T22CV)
	C itabia a manitia a

²⁾ Mid-position

³⁾ The valve function P53F is only available in the 24 V DC version. Values only apply to 24 V DC.

Electrical data, individual	sub-base	
Current rating at 40°C	[A]	2 (1 A per coil)
Degree of protection to EN	60529	IP65, NEMA 4 (for all types of signal transmission when mounted)
Variants with round plug M	112	
Operating voltage range	[V DC]	24 ±10% (for variants with round plug M12 VABSR3)
Surge resistance	[kV]	0.8
Pollution degree		3
Duty cycle	ED	100%
Variants with cable connec	tor	
Operating voltage range	[V DC]	24 ±10% (for variants with cable terminal VABSK1/C1,K2)
	[V AC]	110 ±10% (50 60Hz) (for variants with cable and spring-loaded terminal VABSK1/C1,K2)
Surge resistance	[kV]	4
Pollution degree		3
Duty cycle	[ED]	100%



A cable connector is needed to ensure the IP degree of protection and to protect against tensile load, twisting and bending.

Materials				
Width	18 mm	26 mm	42 mm	52 mm
Sub-base	Die-cast aluminium			Gravity die-cast aluminium
Valve	Die-cast aluminium, P	Ą		
Seals	FPM, NBR			
Note on materials	RoHS-compliant			

Product weight [g]				
Width	18 mm	26 mm	42 mm	52 mm
Valves				
5/2-way solenoid valve, double solenoid (B52, D52)	172	276	439	732
5/2-way valve, single solenoid (M52-A, M52M)	163	293	426	702
5/3-way solenoid valve (P53C, P53E, P53U)	191	320	456	780
5/3-way solenoid valve (P53BD)	172	301	-	-
5/3-way solenoid valve (P53ED, P53EP)	170	291	-	-
5/3-way solenoid valve (P53AD)	172	301	-	-
5/3-way solenoid valve (P53F)	_	-	456	780
2x 3/2-way solenoid valve (T32C, T32U, T32H, T32N, T32F, T32W)	190	335	442	740
2x 2/2-way solenoid valve (T22C, T22CV)	190	335	442	740
Individual connection				
Individual sub-base	192	302	386	815

[1] Plug to EN 61076-2-101																		
Туре	B1	B2	В3	B4 F	B5	D1	D2	D3	D4	D5ø	H1	H2	H3	H4	Н5	Н6	H7	

Турс	DI	DZ	ارما	D4	כט	Dī	DZ	ט	D4	عر تا	1111	112	כוו	111-4	117	110	117
VABS-S4-2S-G18-R3 ¹⁾	32.4	30	18	13	6	G1/8	M5	M5	M12	x1 5.5	31	53.4	14.5	13	13.7	8.8	4
VABS-S4-2S-G18-B-R3 ²⁾	32.4	30	10	13	0	U1/0	INIO	-	10(12)	XI 3.5	31	55.4	14.5	15	15./	0.0	4
				-		1		ı			1	1				1	
Туре	L1		L2		L3	l	_4	L5	5	L6	L:	7	L8		L9	L:	10
VABS-S4-2S-G18-R3 ¹⁾ VABS-S4-2S-G18-B-R3 ²⁾	133.	5	124.5		38.6	2:	2.2	32.	.4	33.2	16	.6	25.3		16.2	4	.5

¹⁾ External pilot air supply

²⁾ Internal pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions Download CAD data → www.festo.com Individual sub-base with cable terminals, width 18 mm В1 В2 H2 Ф \$ Η4 НЗ H5 B5_ Туре В1 В2 В3 В5 D1 D2 D3 D4 D5ø Н1 Н2 Н3 Н4 Н5 Н6 Н7 VABS-S4-2S-G18-K2 1) М5

V	ABS-S4-2S-G18-B-K2 ²⁾
1)	External nilot air sunnly

VABS-S4-2S-G18-K2 1)

Туре

VABS-S4-2S-G18-B-K2 2)

32.4

L1

133.5

30

18

L2

124.5

6

G1/8

L3

38.6

M5

L4

22.2

M20x1.5

L5

32.4

5.5

L6

33.2

31

53.4

L7

16.6

14.5

L8

25.3

13

13.7

L9

16.2

8.8

4

L10

4.5

²⁾ Internal pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions Download CAD data → www.festo.com Individual sub-base with M12 plug, width 26 mm H2 H1 Ф *Q*3 **⊕** Γ 19 P8 72 H5 H4 Н6 ΗЗ въ

[1]	Plug to
	EN 61076-2-101

Туре	B1	В3	B4	B5	D1	D2	D3	D4	D5ø	H1	H2	Н3	H4	H5	Н6	H7
VABS-S4-1S-G14-R3 ¹⁾ VABS-S4-1S-G14-B-R3 ²⁾	43	26	13	8.5	G1/4	G1/8	G1/8 -	M12x1	5.5	36.5	53.5	26.5	13	13	12.5	4
Туре	L1		L2	1	L3	L4		L5	L6		L7	L8		L9	L1	10
VABS-S4-1S-G14-R3 ¹⁾	150.	_	141.5		3.6	23.2	,	41.4	37.9		24.2	29.3		20.7	4.	_

¹⁾ External pilot air supply

VABS-S4-1S-G14-B-R3 2)

²⁾ Internal pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions Download CAD data → www.festo.com Individual sub-base with cable terminals, width 26 mm H1 H2 Ф *Q*3 **⊕** 7 2 9 H5 H4 H6 ΗЗ B5_ вз Туре В1 В5 D1 D2 D3 D5ø Н1 Н2 Н3 Н5 Н6 Н7 В3 D4 Н4

G1/8

L4

23.2

M20x1.5

L5

41.4

5.5

L6

37.9

36.5

53.5

L7

24.2

26.5

L8

29.3

13

13

L9

20.7

12.5 4

L10

4.5

1) Externa	l pilot	air	supply
------------	---------	-----	--------

VABS-S4-1S-G14-K2 1)

VABS-S4-1S-G14-B-K2 2)

Туре

VABS-S4-1S-G14-K2 1)

VABS-S4-1S-G14-B-K2 2)

43

L1

150.6

26

8.5

L2

141.5

G1/4

L3

53.6

G1/8

²⁾ Internal pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions Download CAD data → www.festo.com Individual sub-base with M12 plug, width 42 mm H2 Н8 B4 B1 В6 H1 Ф 1 <u>D</u>3 L5 Η4 Н6 ĤЗ B5 [1] Plug to EN 61076-2-101

Туре	B1	В3	B4	B5	В6	D1	D2	D3	D4	D5ø	H1	H2	НЗ	H4	H5	Н6	H7	Н8
VABS-S2-1S-G38-R3 ¹⁾ VABS-S2-1S-G38-B-R3 ²⁾	50	42	13	4	2.2	G3/8	G1/8	G1/8	M20x1.5	5.5	42.5	55.3	29	13.6	17.1	16.3	4	47.5
## 150 02 10 090 B R9																		
Туре		L1		L2		L3	L	4	L5	L6		L7		L8		L9	L	10

¹⁾ External pilot air supply

²⁾ Internal pilot air supply

Dimensions Download CAD data → www.festo.com Individual sub-base with spring-loaded terminal or for assembly by the user, width 42 mm Н8 B6 H1 H2 Ф *D*3 F 7 5 8 H4 Η7 <u>B5</u> ВЗ

Туре	B1	В3	B5	B6	D1	D2	D3	D4	D5ø	H1	H2	Н3	H4	H5	Н6	H7	Н8
VABS-S2-1S-G38-K1 ¹⁾ VABS-S2-1S-G38-C1 ¹⁾ VABS-S2-1S-G38-B-K1 ²⁾	50	42	4	2.2	G3/8	G1/8	G1/8	M20x1.5	5.5	42.5	55.3	29	13.6	17.1	16.3	4	47.5
VABS-S2-1S-G38-B-C1 ²⁾							_										
Туре	L	.1	L	.2	L3	-	L4	L5		L6	L7		L8		L9	L	10
Type VABS-S2-1S-G38-K1 ¹⁾	L	.1	L	2	L3		L4	L5		L6	L7		L8		L9	L	10
VABS-S2-1S-G38-K1 ¹⁾		0.6		1.5	L3 53.		L4 23.2	L5		L6 37	L7 26		L8 28	+	L9 22		10

¹⁾ External pilot air supply

 $^{| \ | \}$ Note: This product conforms to ISO 1179-1 and ISO 228-1.



Electrical connection

• VABS-...-K1: open end

• VABS-...-C1: spring-loaded terminal

²⁾ Internal pilot air supply

Dimensions Download CAD data → www.festo.com Individual sub-base with M12 plug, width 52 mm Н8 H1 H2 В4 В1 Ф **⊕** 00 00 00 \odot \oplus 6 \oplus Н6 19 ш 0 <u>B5</u> [1] Plug to EN 61076-2-101 B1 В3 В4 B5 В6 D1 D2 Н5 Н7 Н8 Туре D3 D4 D5ø Н1 H2 Н3 Н4 Н6 VABS-S2-2S-G12-R3 1) G1/8 G1/2 G1/8 M12x1 65 67 52 13 7.5 2.2 6.5 60 60 43.5 17 26.5 23.5 10

VABS-S2-2S-G12-R3 1)

VABS-S2-2S-G12-B-R3 ²⁾

VABS-S2-2S-G12-B-R3 ²⁾

L1

185

L2

172

L3

17.5

L4

17.5

L5

55.4

L6

99.5

L7

33

L8

88.3

L9

27.7

L10

6.5

External pilot air supply

²⁾ Internal pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions Download CAD data → www.festo.com Individual sub-base with spring-loaded terminal or for assembly by the user, width 52 mm Н8 B1 Н2 Φ Œ <u>8</u> 7 \oplus 6 H5 <u>B5</u>

Туре	B1	В3	B5	В6	D1	D2	D3	D4	D5ø	H1	H2	Н3	H4	H5	Н6	H7	Н8
VABS-S2-2S-G12-K1 ¹⁾							G1/8										
VABS-S2-2S-G12-C1 ¹⁾	67	52	7.5	22	G1/2	G1/8	01/8	M20x1.5	6.5	60	60	42 F	17	26.5	22.5	10	6
VABS-S2-2S-G12-B-K1 ²⁾	6/	52	/.5	2.2	G1/2	G1/8		MIZUX1.5	0.5	60	60	43.5	17	26.5	23.5	10	65
VABS-S2-2S-G12-B-C1 ²⁾							_										

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S2-2S-G12-K1 ¹⁾										
VABS-S2-2S-G12-C1 ¹⁾	105	172	17.5	17.5	F F .	00.5	22	00.2	27.7	(-
VABS-S2-2S-G12-B-K1 ²⁾	185	172	17.5	17.5	55.4	99.5	33	88.3	27.7	6.5
VABS-S2-2S-G12-B-C1 ²⁾	1									

¹⁾ External pilot air supply

Note: This product conforms to ISO 1179-1 and ISO 228-1.



Electrical connection

- VABS-...-K1: open end
- VABS-...-C1: spring-loaded terminal

²⁾ Internal pilot air supply

Accessories – Individual connection

Ordering data			1		1	1
	Description			Width	Part no.	Туре
Individual sub-base	, electrical connection with plug M12 (witho					
	Threaded connection, internal pilot air	Connections	-	18 mm	541070	VABS-S4-2S-G18-B-R3
2:22	supply	G1/8	Explosion group of assembly IIC		8033156	VABS-S4-2S-G18-B-R3-EX1E
		Connections	_	26 mm	541069	VABS-S4-1S-G14-B-R3
		G1/4	Explosion group of assembly IIC		8033158	VABS-S4-1S-G14-B-R3-EX1E
		Connections	_	42 mm	546104	VABS-S2-1S-G38-B-R3
		G3/8	Explosion group of assembly IIC		8033160	VABS-S2-1S-G38-B-R3-EX1E
		Connections	_	52 mm	555645	VABS-S2-2S-G12-B-R3
		G1/2	Explosion group of assembly IIC		8033162	VABS-S2-2S-G12-B-R3-EX1E
	Threaded connection, external pilot air	Connections	-	18 mm	541064	VABS-S4-2S-G18-R3
	supply	G1/8	Explosion group of assembly IIC		8033155	VABS-S4-2S-G18-R3-EX1E
		Connections	_	26 mm	541063	VABS-S4-1S-G14-R3
		G1/4	Explosion group of assembly IIC		8033157	VABS-S4-1S-G14-R3-EX1E
		Connections	_	42 mm	546101	VABS-S2-1S-G38-R3
		G3/8	Explosion group of assembly IIC		8033159	VABS-S2-1S-G38-R3-EX1E
		Connections	_	52 mm	555640	VABS-S2-2S-G12-R3
		G1/2	Explosion group of assembly IIC		8033161	VABS-S2-2S-G12-R3-EX1E
Individual sub-base	, electrical connection via cable terminals					
	Threaded connection, internal pilot air supply	Connections G1/8		18 mm	541067	VABS-S4-2S-G18-B-K2
15 3 3 3		Connections G1/4		26 mm	541065	VABS-S4-1S-G14-B-K2
	Threaded connection, external pilot air supply	Connections G1/8		18 mm	539723	VABS-S4-2S-G18-K2
		Connections G1/4		26 mm	539725	VABS-S4-1S-G14-K2
Individual sub-base	, electrical connection via spring-loaded ter	minal				
	Threaded connection, internal pilot air supply	Connections G3/8		42 mm	546762	VABS-S2-1S-G38-B-C1
		Connections G1/2		52 mm	555643	VABS-S2-2S-G12-B-C1
	Threaded connection, external pilot air supply	Connections G3/8		42 mm	546760	VABS-S2-1S-G38-C1
		Connections G1/2		52 mm	555638	VABS-S2-2S-G12-C1
Individual sub-base	, electrical connection via cable (open end)					
	Threaded connection, internal pilot air supply	Connections G3/8		42 mm	546102	VABS-S2-1S-G38-B-K1
	,	Connections G1/2		52 mm	555641	VABS-S2-2S-G12-B-K1
	Threaded connection, external pilot air supply	Connections G3/8		42 mm	546099	VABS-S2-1S-G38-K1
		Connections G1/2		52 mm	555636	VABS-S2-2S-G12-K1

Accessories – Individual connection

other pneumatic accessories can be found in the chapter Accessories a page: 242

or on the website via the individual search terms:

Internet → connection technology, silencer, blanking plug

Ordering data				
	Description		Part no.	Туре
lug socket for th	he electrical connection of individual valves			
	Angled socket, M12x1, 4-pin, type A, screw terminal		8162292	NECB-M12W4-C2
onnecting cable	e for electrical connection of individual valves, 6-way or 10-way	<u>, </u>		
	Straight socket, M12x1, 5-pinOpen end, 4-core	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	 Angled socket, M12x1, 5-pin, Open end, 4-core 	5 m	8078249	NEBA-M12W5-U-5-N-LE4
neumatic conne	ection accessories			
selection of po	ssible fittings, blanking plugs, silencers and			

Valve terminals VTSA

Accessories

Ordering data	ا ما	1				1	I-
	Code	Descriptio	n			Part no.	Туре
Multi-pin plug distr	ibutor						
	_	15-pin Sul	b-D socket on 8x 3-pin M8 plugs		8 inputs/ outputs	177669	MPV-E/A08-M8
	-	15-pin Sul	b-D socket on 12x 3-pin M8 plugs	5	12 inputs/ outputs	177670	MPV-E/A12-M8
Push-in fitting with	connectir	ng thread					
	_	G1/8 for	tubing O.D. 6 mm	Plastic releas	sing ring	186096	QS-G1/8-6
	E			Metal releas	ing ring	558662	NPQM-D-G18-Q6-P10
	_		tubing O.D. 8 mm	Plastic releas	sing ring	186098	QS-G1/8-8
	E			Metal releas		558663	NPQM-D-G18-Q8-P10
	_	1	tubing O.D. 10 mm	Plastic releas	sing ring	190643	QS-G1/8-10
	_	G1/4 for	tubing O.D. 8 mm	Plastic releas	sing ring	186099	QS-G1/4-8
	E	1		Metal releas	ing ring	558665	NPQM-D-G14-Q8-P10
	_	1	tubing O.D. 10 mm	Plastic releas		186101	QS-G1/4-10
	E	1		Metal releas		558666	NPQM-D-G14-Q10-P10
	_	-	tubing O.D. 12 mm	Plastic releas		186350	QS-G1/4-12
	E	1		Metal releas		558667	NPQM-D-G14-Q12-P10
	_	G3/8 for	tubing O.D. 10 mm	Plastic releas		186102	QS-G3/8-10
	E	- 37, 5.6.		Metal releas		558669	NPQM-D-G38-Q10-P10
	_	-	tubing O.D. 12 mm	Plastic releas		186114	QS-G3/8-12-I
	E	-		Metal releas		558670	NPQM-D-G38-Q12-P10
	_	G1/2 for	tubing O.D. 12 mm	Plastic releas		186104	QS-G1/2-12
	E	- 31,210		Metal releas		558672	NPQM-D-G12-Q12-P10
	E	\dashv	tubing O.D. 14 mm	Metal releas		570451	NPQM-D-G12-Q12-P10
	-	-	tubing O.D. 14 mm	Plastic releas		186105	QS-G1/2-16
			tubing O.D. 10 iiiiii	riastic reteas	oning rinig	180103	Q3-G1/2-10
Barbed hose fitting	g/push-in	fitting					
~ <i>^</i>	_	For right e	nd plate		G3/4	8040613	QS-G3/4-22
					R1	572260	N-1-P-19
	-	For adapte	er plate		R1	572260	N-1-P-19

- - Note

Metal push-in fittings type NPQM-... should be selected when the highest protection is required for electrical and electronic components (anti-static requirements).

Accessories

Ordering data	Code	Description		Part no.	Туре
Silencer	:		:	-	
	U	Standard design, connecting thread	G1/8	2307	U-1/8
			G1/4	2316	U-1/4
9			G3/8	6843	U-3/8-B
			G1/2	6844	U-1/2-B
			G3/4	6845	U-3/4-B
			G1	151990	U-1-B
	A	Sintered design, connecting thread	G1/8	1205860	AMTE-M-LH-G18
			G1/4	1205861	AMTE-M-LH-G14
			G3/8	1205862	AMTE-M-LH-G38
			G1/2	1205863	AMTE-M-LH-G12
			G3/4	1205864	AMTE-M-LH-G34
			G1	1205865	AMTE-M-LH-G1
Blanking plug					
	_	Connecting thread	M5	3843	B-M5
			G1/8	3568	B-1/8
•			G1/4	3569	B-1/4
			G1/2	3571	B-1/2
			G3/4	3572	B-3/4
			G1	5763	B-1
Other pneumatio	connection	accessories	·		·
		s, blanking plugs and silencers can be found			
•	_	dual search terms:			
nternet → conn	ection techn	ology, silencer, blanking plug			