

# Valve terminal VTSA/VTSA-F, NPT

# **FESTO**

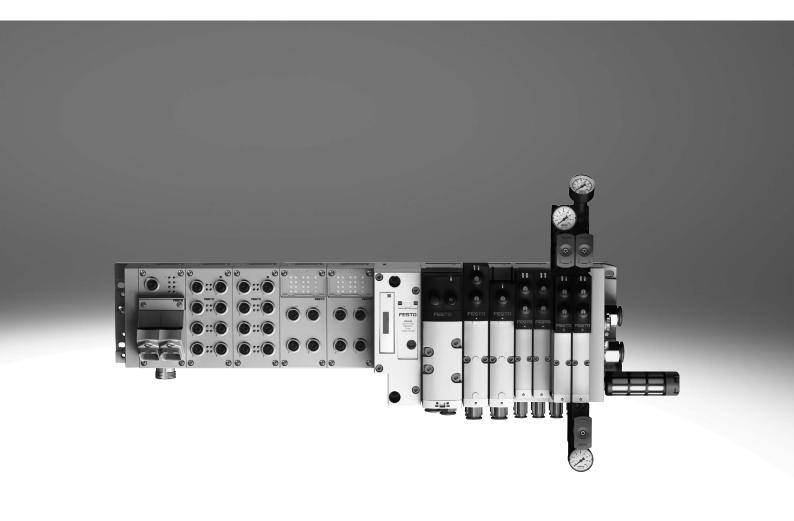

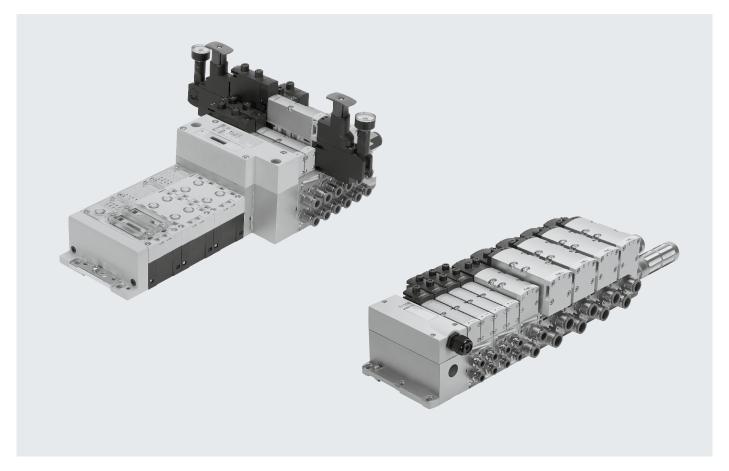

### Innovative

- High-performance valves in a sturdy metal housing
- Five valve sizes on one valve terminal
- Standardised from the multi-pin plug to the fieldbus connection and control block
- Dream team: fieldbus valve terminal suitable for electrical peripherals CPX. This means:
  - Forward-looking internal communication system for actuating the valves and CPX modules
  - Four valve sizes on one valve terminal without adapters
- Valve functions for integration in control architectures of higher categories to EN ISO 13849-1

### Versatile


- Modular system offering a range of configuration options
- Up to 32 solenoid coils
- Conversions and extensions are possible at any time
- Possible to integrate innovative function modules
- Flexible air supply and variable pressure zones
- · Reverse operation
- High pressure range
- -0.9 ... 10 bar, flow rate range 550 ... 4000 l/min
- Wide range of valve functions
- Valves: 24 V DC

### Reliable

- Sturdy and durable metal components
  - Valves
  - Manifold sub-bases
  - Seals
- Fast troubleshooting with LEDs on the valves and diagnostics via fieldbus
- Reliable servicing thanks to valves that can be replaced quickly and easily
- Manual override, either non-detenting, non-detenting/detenting or concealed
- Durable thanks to tried-and-tested piston spool valves
- Large and durable labelling system
- 100% duty cycle

### Easy to install

- Ready-to-install and tested unit
- Reduced selection, ordering, installation and commissioning costs
- Solid wall mounting or DIN rail mounting
- Manifold sub-bases can be extended using four screws, sturdy duct separation on metal support

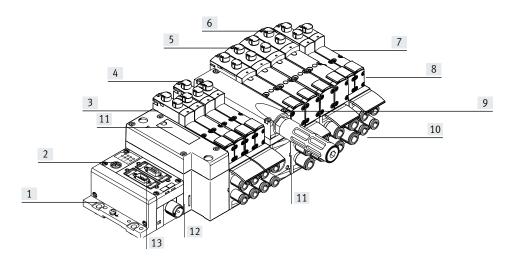

- [1] Quick to mount: directly using screws or DIN rail
- [2] CPX diagnostic interface for handheld devices (channel-oriented diagnostics down to the individual valve)
- [3] Pneumatic interface to CPX
- [4] Widths 18 mm, 26 mm, 42 mm and 52 mm can be combined on one valve terminal without an adapter
- [5] Reduced downtimes: on-site LED diagnostics
- [6] Safe operation: manual override non-detenting, non-detenting/ detenting or concealed
- [7] Versatile: 32 valve positions/32 solenoid coilsOne valve series for a wide range of flow rates
- [8] Comprehensive range of valve functions
- Modular: air supply plate facilitates the creation of multiple pressure zones as well as numerous additional exhaust and supply ports
- [10] Practical: large connections, flow-optimised ducts, sturdy metal threads or pre-assembled push-in connections for compressed air tubing with standardised O.D.
- [11] Convenient: large inscription labels

- [12] Reliable: valves, outputs and logic voltage can be switched off separately
- [13] Simple electrical connections
  - Fieldbus interface via CPX
  - Multi-pin plug connection with pre-assembled cable or terminal strip (Cage Clamp<sup>®</sup>)
  - Control block via CPX
  - AS-Interface
  - Individual connection
  - IO-Link®
  - AP interface

### **Equipment options**

Valve functions

- 2x 2/2-way valve, single solenoid, pneumatic spring, normally closed
- 2x 3/2-way valve, single solenoid
  - Normally open
  - Normally open, reversible
  - Normally closed
  - Normally closed, reversible
- 2x 3/2-way valve, single solenoid
- 1x normally open, 1x normally closed
- 1x normally open, 1x normally closed, reversible

- 5/2-way solenoid valve
  - Single solenoid, pneumatic spring/mechanical spring
  - Double solenoid
  - Double solenoid with dominant signal
- 5/2-way valves for special functions, single solenoid
  - Mechanical spring
  - Switching position sensing via inductive sensors with PNP or NPN output
  - Protection against unexpected start-up to EN 1037
  - Reversing
- 5/3-way solenoid valve
  - Mid-position pressurised
  - Mid-position closed
  - Mid-position exhausted

- 5/3-way solenoid valve for special functions
  - Switching position 14 is retained (switching position 14 is retained in the event of an emergency off application/power failure), there is no spring return to switching position 12.
  - Only for valve terminal (plug-in)
  - Mid-position exhausted or mid-position 1→2, 4→5
  - Switching position 14 is retained
  - Pneumatic spring return

- 5/3-way solenoid valve for special functions
  - Switching position 12 is retained (switching position 12 is retained in the event of an emergency off application/power failure), there is no spring return to switching position 14.
  - Only for valve terminal (plug-in)
  - Mid-position exhausted or mid-position 1→4, 2→3
  - Switching position 12 is retained
  - Pneumatic spring return
- Soft-start valve for slow and safe pressure build-up
  - High degree of safety
  - Sensing function provides feedback on switching operation

### Special features

Individual valve on individual sub-base up to width 52 mm

### Plug-in

- · Electrical connection via standardised 4-pin M12 plug or via 4-pin spring-loaded terminal for configuration by the user
- Available with internal/external pilot air supply

Valve terminal with individual connection

- Max. 20 valve positions/ max. 20 solenoid coils
- Any compressed air supply
- Any number of pressure zones

### Square plug or plug-in, with integrated switching position sensing

- · Electrical connection to DIN EN 175301-803 type C (square plug) or
- · For configuration by the user via 4-pin spring-loaded terminal or
- Cable with open end

Valve terminal with multi-pin plug

- Max. 32 valve positions/
- Any compressed air supply

### Valve terminal with fieldbus connection and electrical peripherals

### **CPX** terminal

- Max. 32 valve positions/ max. 32 solenoid coils
- · Any compressed air supply
- Any number of pressure zones

### AS-Interface

- 1 to 8 valve positions/ max. 8 solenoid coils
- Soft-start valve for slow and safe pressure build-up

### Combinable

- Width 18 mm: flow rate of VTSA up to 550 l/min, VTSA-F up to 700 l/min
- · Width 26 mm: flow rate of VTSA up to 1100 l/min, VTSA-F up to 1350 l/min
- Width 42 mm: flow rate of VTSA up to 1300 l/min, VTSA-F up to 1860 l/min
- Width 52 mm: valve flow rate up to 2900 l/min
- Width 18 mm, 26mm, 42mm and 52mm can be combined on a single valve terminal

# Note

- Valve terminal VTSA complies with ISO 15407-2 in width 18 and 26 mm and
- with ISO 5599-2 in width 42 and 52 mm

### AP interface

- Max. 12 valve positions/ max. 24 solenoid coils
- · Connection to an AP bus master

# connection:

- max. 32 solenoid coils
- Parallel, modular valve links
- · Any number of pressure zones

## I-Port

- Max. 16 valve positions/ max. 32 solenoid coils
- Connection to an I-Port master
- Direct mounting of a bus node

### 10-Link®

- Max. 16 valve positions/ max. 32 solenoid coils
- · Connection to an IO-Link master

Valve terminal configurator			→ Internet: www.festo.com
A valve terminal configurator is available to help you select a suitable VTSA/VTSA-F valve terminal, making it much	The valve terminals are assembled according to your order specification and are individually checked. This	Order a valve terminal VTSA using the order code:	Order a valve terminal VTSA-F using the order code:
easier to order the right product.	reduces assembly and installation	Ordering system for VTSA	Ordering system for VTSA-F
	time to a minimum.	→ Internet: vtsa	→ Internet: vtsa-f
		Ordering system for CPX  → Internet: cpx	Ordering system for CPX  → Internet: cpx
Ordering data – Product options			
	Configurable product This product and all its product options can be ordered using the configurator.	The configurator can be found at  → www.festo.com/catalogue/  Enter the part number or the type.	Part no.     Type       539216     VTSA-MP-NPT       539218     VTSA-FB-NPT       547964     VTSA-F-MP-NPT       547966     VTSA-F-B-NPT       555565     VTSA-ASI-NPT       555567     VTSA-F-ASI-NPT

### Individual pneumatic connection




Valves on individual sub-bases up to width 52 mm can be used for actuators further away from the valve terminal.

The electrical connection is established either via a standard 4-pin M12 plug, 24 V DC (EN 61076-2-101), a

4-pin spring-loaded terminal or a cable with open end 24 V DC, which are configured by the user.


### Valve terminal with individual electrical connection



Control signals from the controller to the valve terminal are transmitted via an individual connecting cable. The valve terminal can be equipped with a maximum of 20 valves and a maximum of 20 solenoid coils.

The electrical connection is established via a 5-pin M12 plug, 24 V DC.

### Valve terminal with multi-pin plug connection:




Control signals from the controller to the valve terminal are transmitted via a pre-assembled multi-core cable or a multi-pin plug connection assembled by the user (spring-loaded terminal). This substantially reduces installation time.

The valve terminal can be equipped with a maximum of 32 valves and a maximum 32 solenoid coils.

#### Variants

- Multi-pin plug connection with terminal strip (spring-loaded terminal), 24 V DC
- Pre-assembled connecting cable, 24 V DC
- Sub-D plug connector for assembly by the user, 37-pin
- Round plug connector M23, 19-pin, 24 V DC

### AS-Interface connection



A special feature of the AS-Interface is the simultaneous transmission of data and supply power via a two-core cable. The encoded cable profile prevents connection with reverse polarity. The valve terminal with AS-Interface is available in the following versions:

- With one to eight modular valve positions (max. 8 solenoid coils). This corresponds to one to eight valves VSVA.
- With all available valve functions.

The connection technology used for the inputs can be selected as with CPX: M8, M12, Sub-D, spring-loaded terminal (terminals to IP20).

### More information


→ Internet: as-interface

# - 🖣 - Note

The valve terminal VTSA/VTSA-F with AS-Interface connection is based on the same electrical links as the valve terminal with multi-pin plug connection. This means a valve terminal with multi-pin plug connection can be converted using an AS-Interface module (→ page 135). The technical specifications of the AS-Interface system must be observed in this case.

- → Page 62
- → Internet: as-interface

### Valve terminal with I-Port/IO-Link® connection




The connection to a higher-order controller can be achieved by:

- Connection to an I-Port master from Festo (e.g. CPX-CTEL)
- Direct mounting of a bus node on the I-Port interface
- Connection to an IO-Link master (in IO-Link® mode)

The valve terminal can comprise a maximum of 32 solenoid coils or 16 valve positions.

### Valve terminal with fieldbus interface from the CPX system




An integrated fieldbus node manages the communication connection with a higher-order PLC. This enables a space-saving pneumatic and electrical solution to be implemented.

Valve terminals with fieldbus interfaces from the CPX system can be configured with up to 16 manifold sub-bases.
With 2 solenoid coils per connection, up to 32 solenoid coils can thus be actuated.

### Variants

- PROFIBUS
- DeviceNet®
- CANopen
- CC-LINK®
- EtherNet/IP
- EtherCAT<sup>®</sup>
- Modbus TCP
- PROFINET
- POWERLINK
- Sercos III
- → Internet: cpx

### Valve terminal with control block connection from the CPX system




A controller integrated in the Festo valve terminal enables the construction of stand-alone control units with protection to IP65 without a control cabinet thanks to two different operating modes.

In the slave operating mode, these valve terminals can be used for intelligent preprocessing and are therefore ideal modules for designs using decentralised intelligence.

In the master operating mode, terminal groups can be designed with many options and functions that can autonomously control a medium-sized machine/system.

→ Internet: cpx

### CP string extension from the CPX system




The optional CP string extension enables additional valve terminals and I/O modules to be connected to the field-bus node of the CPX terminal on up to 4 CP strings. Different input and output modules as well as valve terminals MPA-S and CPV can be connected.

The maximum length of the CP string extension is 10 metres, which means that the extension modules can be mounted directly on-site. All the required electrical signals are transmitted via the CP cable, which in turn means that no further installation is needed on the extension module.

One CP string offers:

- 32 input signals
- 32 output signals for output modules 24 V DC or solenoid coils
- Logic and sensor supply for the input modules
- Load voltage supply for the valve terminals
- Logic supply for the output module
- → Internet: cpi


### Valve terminal with AP interface



Control signals from the controller to the valve terminal are transmitted via the AP bus protocol from Festo. The valve terminal can comprise a maximum of 24 solenoid coils or 12 valve positions.

## Key features – Valves

### Solenoid valve with switching position sensing, width 18 mm, 26 mm



The 5/2-way single solenoid valve with spring return in width 26 mm features switching position sensing.


The normal position of the piston spool is monitored.

It is available as a plug-in or individual connection valve with pilot valves to ISO 15218 and square plug type C. This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC.

It is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

→ Page 138

### Control block with safety function, width 26 mm



5/2-way solenoid valve These valves are used for special applications, for example for:


- Protection against unexpected start-up
- · Safe reversing
- Drives in manually loaded devices

This control block is suitable for use as a press safety valve to EN 962.

This valve is a safety device in accordance with the Machinery Directive 2006/42/EC.

→ Page 148

### Pilot air switching valve, width 18 mm, 26 mm



The pilot air switching valve is a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S. It enables the pilot air to be verifiably switched on and off (sensing function) from duct 1 to 14 for the entire pressure zone or valve terminal.

Switching position sensing is carried out using an inductive PNP proximity switch with cable and M12x1 push-in connector to EN 61076-2-104.

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC.


It is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

→ Page 155

## - 🖥 - Note

The pilot air switching valve can only be operated on the valve terminal VTSA/VTSA-F in combination with a right end plate for external pilot air type VABE-S6-1RZ-.... Port 14 on the right end plate must then be sealed.

### Soft-start valve, module width 43 mm



The soft-start valve is separately electrically actuated, independently of the multi-pin plug connection, AS-Interface or fieldbus interface, via a square plug of type C to EN 175301-803 or optionally via an M12 adapter.

The valve can optionally be ordered with a sensor that monitors switching of the soft-start valve. The soft-start valve can supply the valve terminal or one or more pressure zones with working air.


The pressure build-up for each pressure zone is optimised for the application directly at the valve terminal by setting the switch-over pressure and the filling time.

A maximum of 5 soft-start valves can be integrated on one valve terminal in this way.

→ Page 164

# Key features – Valves

### Vacuum block, module width 53 mm



5/3-way solenoid valve, with switching position 12 retained.

The vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm, and thus integrated into the valve terminal VTSA/VTSA-F.

The vacuum block is supplied with power and the vacuum is sensed via a standardised 4-pin M12 plug.

The vacuum block is used in conjunction with a suction gripper to pick up, hold and place components. An adjustable ejector pulse is used for setting the components down.

The vacuum block is equipped with an air saving function.

If the electrical or pneumatic supply fails, the valve moves to switching position 12 "generate vacuum".

→ Page 174

### 5/3-way solenoid valve for special functions

For holding, blocking a movement (mechanically)

5/3-way solenoid valve for special functions; port 2 is pressurised, port 4 exhausted. Switching position 14 is retained (code SA).

5/3-way solenoid valve for special functions; port 2 is pressurised, port 4 exhausted. Switching position 12 is retained (code SE).

Possible applications:

- Using lifting cylinders
- Using rotary cylinders

Possible applications:

- Using lifting cylinders
- Using rotary cylinders

For pressureless switching, self-holding, pneumatic operation

5/3-way solenoid valve for special functions (3 phases). Mid-position is exhausted. Switching position 14 is retained.

5/3-way solenoid valve for special functions (3 phases). Mid-position is exhausted. Switching position 12 is retained.

Possible applications:

Pneumatic manual clamps for devices (inserting stations)

Possible applications:

Pneumatic manual clamps for devices (inserting stations)

# Peripherals

### Modular pneumatic peripherals

The modular design of the valve terminal VTSA/VTSA-F enables outstanding flexibility right from the planning stage and offers maximum ease of service in operation.


The system consists of manifold sub-bases and valves.

The manifold sub-bases are screwed together, thus forming the support system for the valves.


Inside the manifold sub-bases are the connection ducts for supplying compressed air to and exhausting the valve terminal as well as the working ports for the pneumatic cylinders for each valve.

Each manifold sub-base is connected to the next using four screws. Individual valve terminal sections can be isolated and further blocks easily inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.


### Basic system modularity

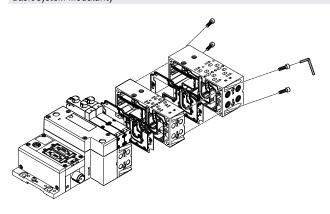

## Valve modularity

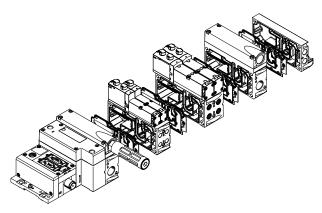

### Vertical stacking modularity

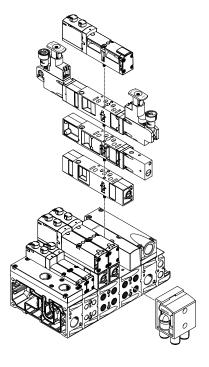

# Peripherals

### Modular electrical peripherals


The valves are actuated differently depending on whether a multi-pin terminal or fieldbus terminal is used.

The VTSA/VTSA-F with CPX interface is based on the internal bus system of the CPX and uses this communication system for all solenoid coils and a range of electrical input and output functions.


Parallel links enable the following:

- Transmission of switching information
- Compact design
- Position-based diagnostics
- Separate power supply for valves
- Flexible conversion without address shifting
- Option of CP interface
- CPX-CEC as stand-alone controller with access via Ethernet and web server
- Transmission of status, parameter and diagnostic data
- → Internet: cpx


## VTSA/VTSA-F with electrical peripherals CPX

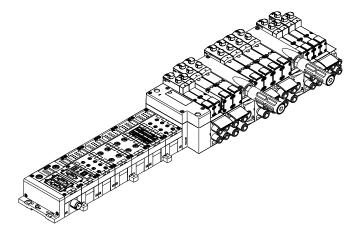

### Modularity with electrical peripherals CPX

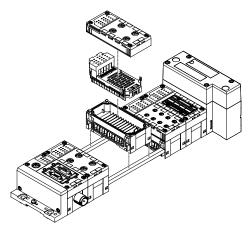

### CPX terminal in metal design

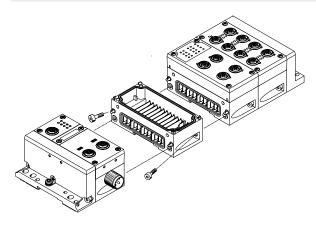

The metal CPX modules are mechanically connected using an angled fitting

The CPX terminal can thus be expanded at any time.



### Note

The CPX connection blocks are also available in metal. This means a complete solution in a sturdy metal design can be selected for applications of the valve terminal VTSA/VTSA-F in welding environments.

### Valve terminal widths

Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Regardless of the type of control (e.g. multi-pin plug, fieldbus, etc.), valve terminals VTSA/VTSA-F


of widths
• 18 mm

- 26 mm
- 42 mm
- 52 mm

can be combined without adapters.
This enables a flow range for the VTSA of-

400 l/min to 2900 l/min For the VTSA-F of: 700 l/min to 2900 l/min

to be covered on one valve terminal. A wide range of valve functions and vertical stacking components are available for all widths.

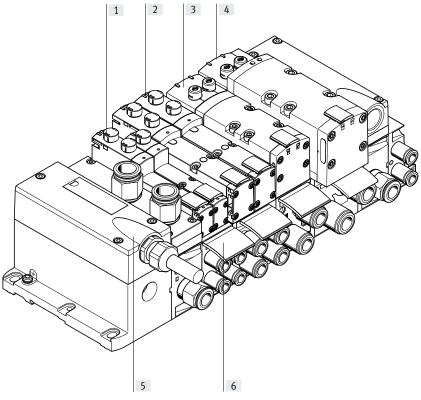


		Description	→ Page/Internet
[1]	Valve	Width 18 mm	98
[2]	Valve	Width 26 mm	106
[3]	Valve	Width 42 mm	114
[4]	Valve	Width 52 mm	121
[5]	Multi-pin plug connection	Via multi-pin cable, 24 V DC	135
[6]	Inscription labels	For manifold sub-base, connecting plate, angled connection plate	137

### Individual sub-base, width 18 mm, ISO 15407-2

Order code: Individual sub-bases can be equipped

• Using individual part numbers with any valve.


Width 18 mm with spring-loaded terminal or cable (open end)

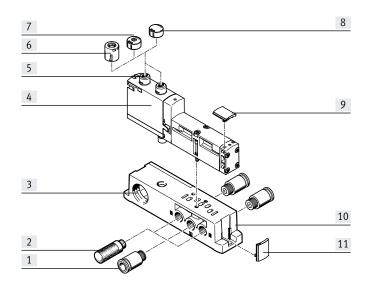

		Description	→ Page/Internet
[1]	Fitting	1/8 NPT for working air/exhaust ports (1, 3, 5) and working ports (2, 4)	189
[2]	Silencer	U-1/8-B-NPT for exhaust ports (3, 5)	190
[3]	Electrical connection	Spring-loaded terminal, cable (open end)	-
[4]	Valve VSVA	Width 18 mm	98
[5]	Manual override	Non-detenting/detenting, per solenoid coil	-
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	134
[7]	Cover cap, coded	For non-detenting manual override (limited function)	134
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	134
[9]	Inscription label holder	For valves	137
[10]	Individual sub-base	For valve VSVA	188
[11]	Inscription label holder	For manifold block	137

## Individual sub-base, width 26 mm, ISO 15407-2


With spring-loaded terminal or cable (open end)

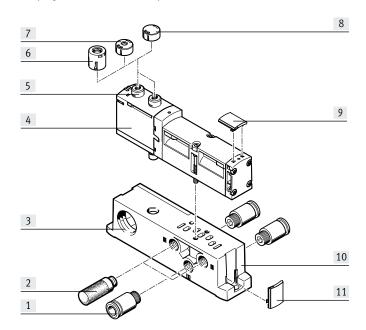

		Description	→ Page/Internet
[1]	Fitting	1/4 NPT for working air/exhaust ports (1, 3, 5) and working ports (2, 4)	189
[2]	Silencer	U-1/4-B-NPT for exhaust ports (3, 5)	190
[3]	Electrical connection	Spring-loaded terminal, cable (open end)	-
[4]	Valve VSVA	Width 26 mm	106
[5]	Manual override	Non-detenting/detenting, per solenoid coil	-
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	134
[7]	Cover cap, coded	For non-detenting manual override (limited function)	134
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	134
[9]	Inscription label holder	For valves	137
[10]	Individual sub-base	For valve VSVA	188
[11]	Inscription label holder	For manifold block	137

## Individual sub-base, width 42 mm, ISO 5599-2


With spring-loaded terminal or cable (open end)

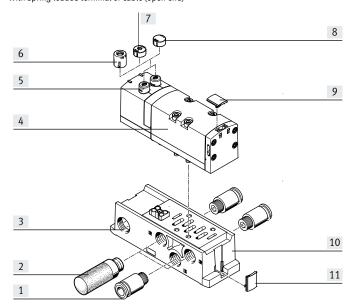

		Description	→ Page/Internet
[1]	Fitting	3/8 NPT for working air/exhaust ports (1, 3, 5) and working ports (2, 4)	189
[2]	Silencer	U-3/8-B-NPT for exhaust ports (3, 5)	190
[3]	Electrical connection	Spring-loaded terminal, cable (open end)	-
[4]	Valve VSVA	Width 42 mm	114
[5]	Manual override	Non-detenting/detenting, per solenoid coil	-
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	134
[7]	Cover cap, coded	For non-detenting manual override (limited function)	134
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	134
[9]	Inscription label holder	For valves	137
[10]	Individual sub-base	For valve VSVA	188
[11]	Inscription label holder	For manifold block	137

## Individual sub-base, width 52 mm, ISO 5599-2

With spring-loaded terminal or cable (open end)

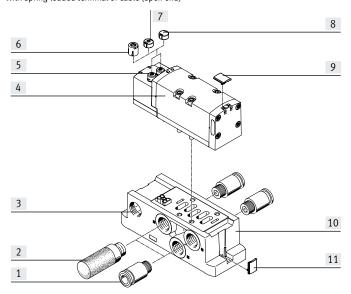

		Description	→ Page/Internet
[1]	Fitting	1/2 NPT for working air/exhaust ports (1, 3, 5) and working ports (2, 4)	189
[2]	Silencer	U-1/2-B-NPT for exhaust ports (3, 5)	190
[3]	Electrical connection	Spring-loaded terminal, cable (open end)	-
[4]	Valve VSVA	Width 52 mm	121
[5]	Manual override	Non-detenting/detenting, per solenoid coil	-
[6]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	134
[7]	Cover cap, coded	For non-detenting manual override (limited function)	134
[8]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	134
[9]	Inscription label holder	For valves	137
[10]	Individual sub-base	For valve VSVA	188
[11]	Inscription label holder	For manifold block	137


### Pneumatic components of the valve terminal

The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves depending on the size.

The manifold sub-bases for valves with a width of 42 or 52 mm are suitable for

- 1 single solenoid valve or
- 1 double solenoid valve
- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

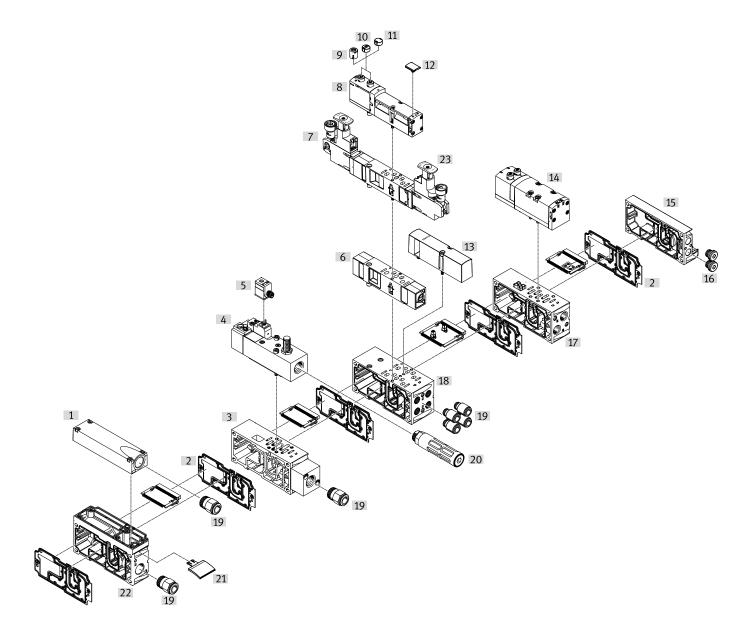

Pneu	Pneumatic components of the valve terminal			
		Description	→ Page/Internet	
[1]	Exhaust port cover	For ducted exhaust air (ports 3 and 5 combined)	129	
[2]	Duct separation/seal	-	129	
[3]	Manifold sub-base	For soft-start valve	172	
[4]	Soft-start valve	For slow and safe pressure build-up	172	
[5]	Plug socket	-	173	
[6]	Throttle plate	-	134	
[7]	Pressure regulator plate	-	130	
[8]	Valve	Width 18 mm or 26 mm	98, 106	
[9]	Cover cap, heavy duty	For manual override, non-detenting heavy duty, detenting via accessory	134	
[10]	Cover cap, coded	For non-detenting manual override (limited function)	134	
[11]	Cover cap, concealed	MO concealed by cover cap – operation of MO prevented	134	
[12]	Inscription label holder	For valve	137	
[13]	Cover plate	For unused valve position (vacant position)	134	
[14]	Valve	Width 42 mm or 52 mm	114, 121	
[15]	End plate with pilot air selector	-	128	
[16]	Blanking plug	-	190	
[17]	Manifold sub-base VTSA	For valves with a width of 42 mm or 52 mm	128	
[17]	Manifold sub-base VTSA-F	For valves with a width of 42 mm or 52 mm	128	
[18]	Manifold sub-base VTSA	For valves with a width of 18 mm or 26 mm	128	
[18]	Manifold sub-base VTSA-F	For valves with a width of 18 mm or 26 mm	128	
[19]	Fittings	-	189	
[20]	Silencer	-	190	
[21]	Inscription label holder	For manifold sub-base, connecting plate, angled connection plate	137	
[22]	Supply plate	-	129	
[23]	Control element	Regulator knobs in different versions	34	



Special applications for the valve terminal, such as:

- Solenoid valve with switching position sensing
- Control block with safety function
- Pilot air switching valve
- Soft-start valve
- Vacuum block

18

are listed after → Accessories – General

### Valve terminal with individual electrical connection

Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components


Valve terminals VTSA/VTSA-F with individual electrical connection can be expanded with up to 20 valves with max. 20 solenoid coils.

The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.
- The electrical connection is established via a 5-pin M12 plug (24 V DC).

			Description	→ Page/Internet
]	[1]	Cover	For individual connection	135
]	[2]	Multi-pin plug connection	Individual connection with M12, 10-way or 6-way (including cover)	135

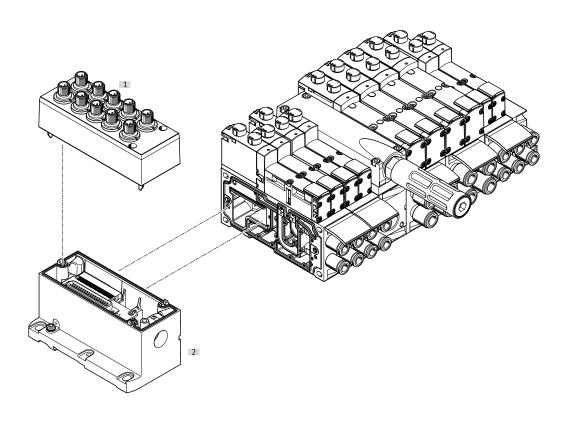

### Valve terminal with electrical multi-pin plug connection

Order code for VTSA:


- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with electrical multi-pin plug connection can be expanded with up to 32 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.
- The following multi-pin plug connections to IP65 are available:
- 37-pin Sub-D connection (24 V DC): the connecting cable can be ordered in lengths of 2.5 m, 5 m and 10 m for max. 8, 22 or 32 solenoid coils respectively.
- Terminal strip (24 V DC), 19-pin round plug (24 V DC)

		Description	→ Page/Internet
[1]	Inscription labels	Large, for multi-pin plug connection	-
[2]	Multi-pin cable	-	136
[3]	Multi-pin plug connection	Via M23 round plug connection, 24 V DC	135
[4]	Multi-pin plug connection	Via terminal strip (CageClamp) 24 V DC	135
[5]	Multi-pin plug connection	Via multi-pin cable, 24 V DC	135

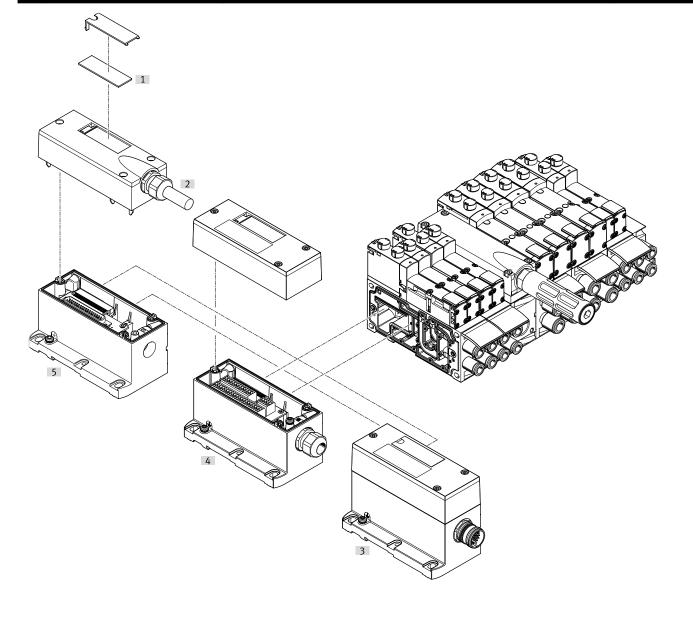

→Internet: www.festo.com/catalogue/...

### Valve terminal with AS-Interface connection


Order code for VTSA:

- 52E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 52E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

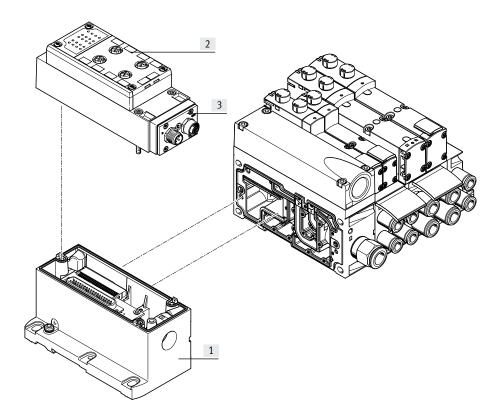

		Description	→ Page/Internet
[1]	Multi-pin plug connection	Can be ordered together with the AS-Interface module as an electrical connection for AS-Interface	135
[2]	Manifold block for AS-Interface	-	136
[3]	AS-Interface module	-	135

### Valve terminal with I-Port/IO-Link® connection


Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with I-Port/IO-Link® connection can be expanded with up to 16 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

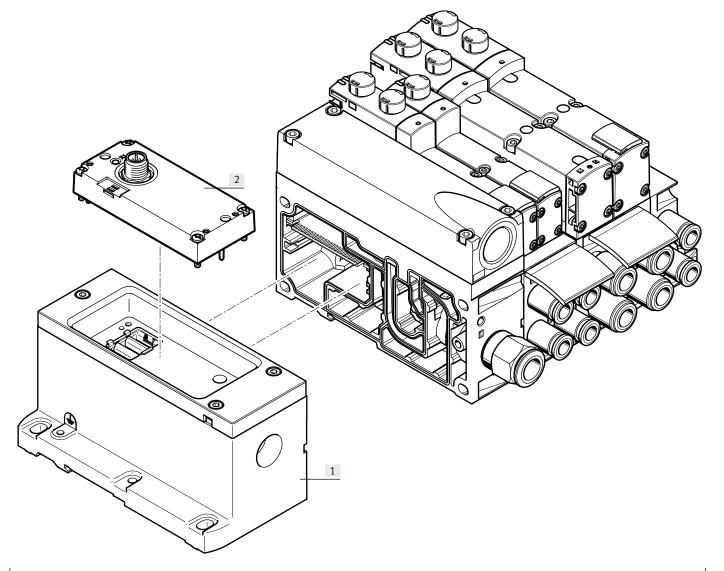

		Description	→ Page/Internet
[1]	Multi-pin plug connection	-	135
[2]	I-Port/IO-Link® connection	Electrical interface IO-Link®	135

### Valve terminal with AP interface


Order code for VTSA:

- 44E-... for the electric components
- 44P-... for the pneumatic components Order code for VTSA-F:
- 45E-... for the electric components
- 45P-... for the pneumatic components

VTSA/VTSA-F valve terminals with AP interface can be expanded with up to 12 valves with a maximum of 24 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either

- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

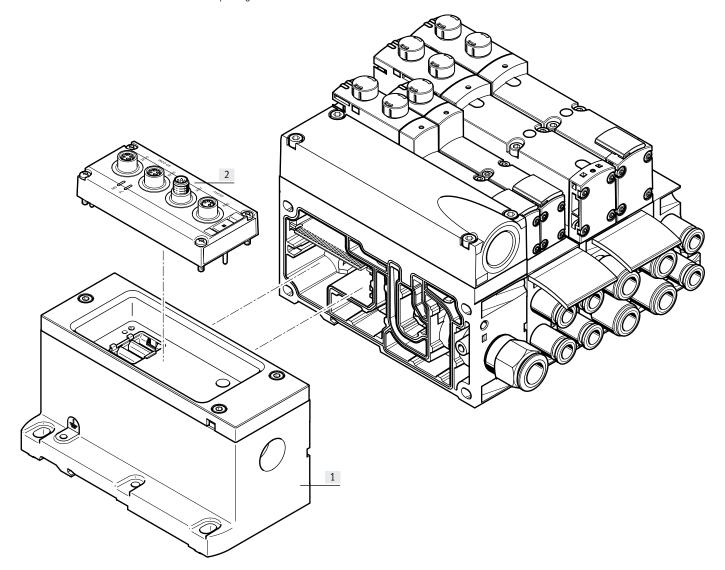

		Description	→ Page/Internet
[1]	Multi-pin plug connection	-	135
[2]	AP interface	Electrical interface protocol AP-COM	72

### Valve terminal with fieldbus interface, control block (electrical peripherals CPX)

Order code:

- 50E-... for the electrical peripherals, polymer variant
- 51E-... for the electrical peripherals, metal variant
- 53E-... for the electrical peripherals, for control cabinet installation
- 44P-... for the pneumatic components For VTSA-F:
- 45P-... for the pneumatic components

Valve terminals VTSA/VTSA-F with fieldbus interface can be expanded with up to 32 valves with max. 32 solenoid coils. The manifold sub-bases for valves with a width of 18 or 26 mm are suitable for either


- 2 single solenoid valves or
- 2 double solenoid valves and the manifold sub-bases for valves with a width of 42 or 52 mm are suitable for
- 1 single solenoid valve or
- 1 double solenoid valve depending on the size.

- Double solenoid valve positions can be equipped with any valve or a cover plate.
- Single solenoid valve positions can only be equipped with single solenoid valves or a blanking plate.

Each valve position can be equipped with any valve or a blanking plate. The rules for CPX apply to the equipment that can be used with the electrical peripherals CPX. In general:

- Max. 10 electrical modules
- Digital inputs/outputs
- Analogue inputs/outputs

- Parameterisation of inputs and outputs
- Integrated, convenient diagnostics
- Preventive maintenance concepts

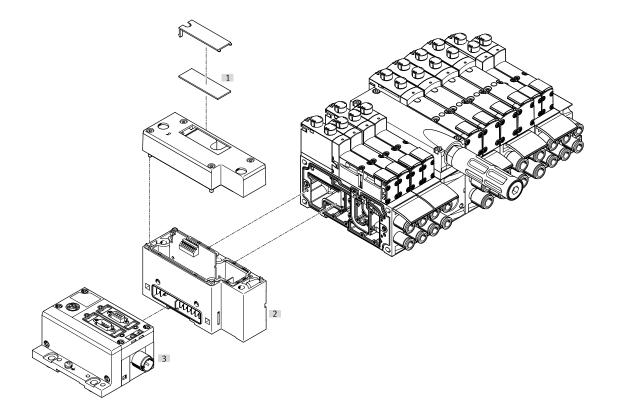

		Description	→ Page/Internet
[1]	Inscription labels	Large, for pneumatic interface CPX	-
[2]	Pneumatic interface	-	135
[3]	Fieldbus interface	-	срх

### Valve terminal with fieldbus/multi-pin plug connection and individually electrically actuated valve

In applications with specific emergency off conditions, it may be necessary to switch one or more valves separately from the valve terminal controller.


Standards-based valves (VSVA) with individual electrical connection (round or square plug) are therefore mounted on the valve terminal.

In order for degree of protection IP65 to be achieved, the functionless opening in the sub-base for the electrical connection must be sealed.

A sealing cap is available for width 18 mm and 26 mm.

With manifold or individual sub-bases, valves with width 42 mm and 52 mm must be used with a seal to comply with the IP protection class (see → page 134).

For centrally controlling the valve terminal via a multi-pin plug connection or fieldbus interface, the occupied valve position acts like a vacant position, i.e. the assigned address in the fieldbus node or the corresponding connection in the multi-pin plug connection is occupied.

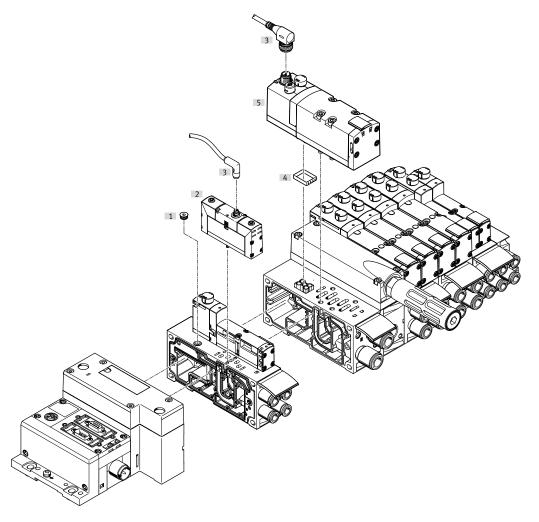

		Description	→ Page/Internet
[1]	Sealing cap	For sealing the electrical connection on the sub-base	134
[2]	Valve	Width 18 mm or width 26 mm	vsva
[3]	Connecting cable	-	vsva
[4]	Seal	For ensuring the IP degree of protection (with width 42 mm and 52 mm)	134
[5]	Valve	Width 42 mm or width 52 mm	vsva




### Note

Standards-based valves VSVA can be used on the valve terminal. A vacant position must be provided for this in the valve terminal configurator.

The appropriate standards-based valve VSVA can be ordered on the Internet at:

→ vsva

### Manifold sub-base



VTSA/VTSA-F is based on a modular system which consists of manifold sub-bases and valves. The VTSA-F manifold sub-bases are designed to optimise the flow rate. Manifold sub-bases are available for valve widths 18 mm and 26 mm in a double grid, i.e. two valves per manifold sub-base. For valves with a width of 42 mm or 52 mm, there are manifold sub-bases with one valve per sub-base. The manifold sub-base contains

a duct seal and an electrical linking module. They can be freely mixed within a valve terminal. The manifold sub-bases are screwed together, thus forming the support system for the valves. Inside the manifold sub-bases are the connection ducts for supplying compressed air to and exhausting the valve terminal as well as the working ports for the pneumatic cylinders for each valve. Each manifold sub-base is connected to the next using four


manifold. Individual valve terminal sections can be isolated and further manifold sub-bases can be inserted by loosening these screws. This ensures that the valve terminal can be rapidly and reliably extended.

### Port patterns to ISO 15407-2

Width 18 mm (size 02)


0

Width 26 mm (size 01)




### Port patterns to ISO 5599-2

Width 42 mm (size 1)



Width 52 mm (size 2)



### Port patterns - High-flow sub-bases with optimised flow rate (no standard)


Width 18 mm

0

Width 26 mm



Width 42 mm





The illustrations show the pneumatic ISO port patterns.

The port patterns on the valve terminal VTSA-F do not correspond to the ISO standard.

Code		Туре	Width				No. of valve positions (solenoid coils) <sup>1)</sup>	Working ports (2, 4)		
			18 mm	26 mm	42 mm	52 mm		Code M Large	Code N Small	
	sub-base for double solenoid val									
4		VABV-S4-2S-N18-2T2	•	_	_	-	2 (4)	QB-1/8-5/16-U	_	
λK								-	QB-1/8-1/4-U	
3		VABV-S4-1S-N14-2T2	-	•	_	-	2 (4)	QB-1/4-3/8-U	_	
K								-	QB-1/4-5/16-U	
		VABV-S2-1S-N38-T2	-	-	•	-	1 (2)	QB-3/8-1/2-U	_	
:K	000							-	QB-3/8-3/8-U	
) )K		VABV-S2-2S-N12-T2	-	_	_	•	1 (2)	QB-1/2-1/2-U	_	
	sub-base for single solenoid valv					ī	2 (2)	00.4/0.5/46.11	1 _	
K		VABV-S4-2S-N18-2T1	•	_	_	_	2 (2)	QB-1/8-5/16-U		
								-	QB-1/8-1/4-U	
F		VABV-S4-1S-N14-2T1	-	-	_	_	2 (2)	QB-1/4-3/8-U	-	
K								-	QB-1/4-5/16-U	
ì	500	VABV-S2-1S-N38-T1	-	_	•	-	1 (1)	QB-3/8-1/2-U	_	
ŝΚ								-	QB-3/8-3/8-U	
1		VABV-S2-2S-N12-T1	-	-	-	•	1 (1)	QB-1/2-1/2-U	_	
łK								-	-	


<sup>1)</sup> The value in brackets is the max. number of solenoid coils that can be actuated

de		Туре	Width				No. of valve positions (solenoid coils) <sup>1)</sup>	Working ports (2, 4)	
			18 mm	26 mm	42 mm	52 mm		Code M Large	Code N Small
anifold sub-base	for double solenoid valve	,				•			
		VABV-S4-2S-G18-2T2		_	_	_	2 (4)	QS-G1/8-8	_
			_					-	QS-G1/8-6
	10000	VABV-S4-1S-G14-2T2			_	_	2 (4)	QS-G1/4-10	_
				•		_		-	QS-G1/4-8
	<b>1</b> 10 500	VABV-S2-1S-G38-T2				_	1 (2)	QS-G3/8-12	_
			_	_	•	-		_	QS-G3/8-10
		VABV-S2-2S-G12-T2					1 (2)	QS-G1/2-16	_
	. •							-	QS-G1/2-12
anifold sub-base	for single solenoid valves		-	-	-	•			
amiota sab base	TOT SITISTE SOLETION VICES	VABV-S4-2S-G18-2T1				1	2 (2)	QS-G1/8-8	
		VVBV 54 25 010 211	-	-	-	-	2 (2)	-	QS-G1/8-6
	100	VABV-S4-1S-G14-2T1					2 (2)	QS-G1/4-10	Q3 01/0 0
		V/IDV 54 15 014 211	_	•	-	-	2 (2)	-	QS-G1/4-8
		VABV-S2-1S-G38-T1					1 (1)	QS-G3/8-12	Q3 01/4 0
		V/IDV 32 13 030 11	_	-	•	-	1 (1)	Q3 Q3/Q 12 _	QS-G3/8-10
•		VABV-S2-2S-G12-T1					1 (1)	QS-G1/2-16	Q3-03/0-10
		VADV-52-25-012-11					1 (1)	Q3-01/2-10	QS-G1/2-12
			-	-	-	•			2 32/2 32

<sup>1)</sup> The value in brackets is the max. number of solenoid coils that can be actuated

Angled connection plate for working ports 2 and 4 with NPT thread									
Code		Туре	Width 18 mm	26 mm	42 mm	52 mm	Connections	Working ports (2, 4) on the 90°-connection plate	
Р		VABF-S4A2G2-N	-	-	-	-	2 and 4	1/8 NPT	
			-	-	-	-		1/4 NPT	
			-	-	-	-		3/8 NPT	
			-	I	1	•		1/2 NPT	

### Sub-base valve



All valves have a piston spool and patented sealing system, which ensures efficient sealing, a broad operating pressure range and long service life. Sub-base valves can be quickly replaced since the tubing connections remain on the manifold sub-base.

Irrespective of the valve function, there are sub-base valves with one solenoid coil (single solenoid) or with two solenoid coils for double solenoid or double valve functions.

### Reverse/vacuum operation

Select reverse operation (code Z) if you wish to operate an actuator (cylinder) with different pressures for the forward and return stroke.

Please note that the valves must then be operated via a separate pressure zone.

The reversible 3/2-way solenoid valves are also suitable for vacuum operation.

Reverse operation is only possible in pressure zones with external pilot air supply.



### Note

- If a pressure zone is in reverse operation, the supply pressure is connected to port 3/5 and the air is exhausted via port 1 at all valve positions in this pressure zone.
- Reversible pressure regulators cannot be selected when a pressure zone is in reverse operation.
- With reversible pressure regulators, only the valve at this position is in reverse operation.
- When using 5/3-way valves in reverse operation, the mid-position function switches from exhausted to pressurised and vice versa.

# Cover plate




Plate without valve function for reserving valve positions on a valve terminal.

Valve and blanking plates are mounted on the manifold sub-base using screws.

### Design

### Replacing valves

The valves are attached to the metal manifold sub-base using two or four screws, which means that they can be easily replaced.

The sturdy mechanical structure of the sub-base ensures efficient, durable sealing.

### Extension

Vacant positions can be fitted with valves at a later date. The dimensions, mounting points and existing pneumatic installations remain unchanged during this process.

For more information and technical data on extension, refer to the user manual:

→ Internet: VTSA/VTSA-F

Valve fund		Valve	Width				Description
code	Circuit symbol	code	18 mm	26 mm	42 mm	52 mm	Description
VC	12/14 1 (14)	T22C	•	•	-	•	2x 2/2-way valve, single solenoid  Normally closed  Pneumatic spring return
W	112/114 11 11 11 (14) (5) (3)	T22CV	•	•	-	-	2x 2/2-way valve, single solenoid  Reverse operation  Normally closed  Pneumatic spring return  Vacuum operation possible at 3 and 5
N	10 T T T T T T T T T T T T T T T T T T T	T32U	•	•	-	•	2x 3/2-way valve, single solenoid  Normally open  Pneumatic spring return  Operating pressure > 3 bar
К	12 12 12 12 12 12 12 12 12 12 12 14 (14) 1 5 3	T32C	•	•	-	•	2x 3/2-way valve, single solenoid  Normally closed  Pneumatic spring return  Operating pressure > 3 bar
Н	12/14 1 5 3	Т32Н	•	•	-	•	2x 3/2-way valve, single solenoid  Normal position  1x normally closed  1x normally open  Pneumatic spring return  Operating pressure > 3 bar
P	30/50 5 1 3 12 (14) (1) (5/3) (1)	T32F	•	•	-	•	2x 3/2-way valve, single solenoid Reverse operation only Normally open Pneumatic spring return
Q	32/54 5 1 3 12 (14) (1) (5/3) (1)	T32N	•	•	-	•	2x 3/2-way valve, single solenoid Reverse operation only Normally closed Pneumatic spring return
R	30/54 5 1 3 12 30/54 (14) (1) (5/3) (1)	T32W	•	•	•	•	2x 3/2-way valve, single solenoid  Reverse operation only  Normal position  1x normally closed  1x normally open  Pneumatic spring return

# - 🖣 - Note

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup).

Valve fund		1,64	Lwest				Description
code	Circuit symbol	Valve code	Width 18 mm	26 mm	42 mm	52 mm	Description
М	14 4 2 12 14 5 1 3	M52-A	•	•	•	•	5/2-way valve, single solenoid  Reverse operation  Pneumatic spring return
0	14 4 2 T T T T T T T T T T T T T T T T T	M52-M	•	•	•	•	5/2-way valve, single solenoid Reverse operation Mechanical spring return
J	14 4 2 12 (14) 5 1 3	B52	•	•	•	•	5/2-way valve, double solenoid
D	14 4 2 12 12 (14) 5 1 3	D52		•	•	-	5/2-way valve, double solenoid  Dominant signal at port 14 on the control side
SO SQ SS	14 2 G 14 5 1 3	M52-M	•	-	-	-	5/2-way valve <sup>2)</sup> , single solenoid, as plug-in or via pilot valve with pneumatic interface to ISO 15218  See also special valve function in the separate chapter "Solenoid valve with switching position sensing"  → page 138
SO SQ SS	4 2 G 14 5 1 3	M52-M	-	•	-	-	5/2-way valve <sup>2)</sup> , single solenoid, as plug-in or via pilot valve with pneumatic interface to ISO 15218 See also special valve function in the separate chapter "Solenoid valve with switching position sensing"  → page 138
SP SN	14 14 14 14 14 15 13 13 14 15 13 13 14 15 15 15 15 15 15 15 15 15 15 15 15 15	T52-M	-	•	-	-	2x 5/2-way valve, single solenoid, with switching position sensing, pneumatically linked via two ducts as special valve function "control block with safety function"  → page 148
В	14 W 4 2 W 12 (14) 5 1 3	P53U		•	•	•	5/3-way solenoid valve  • mid-position pressurised <sup>1)</sup> • Mechanical spring return
G	14 W 4 2 W 12 (14) 5 1 3	P53C	•	•	•	•	5/3-way solenoid valve  • Mid-position closed¹¹  • Mechanical spring return
E	14 W 4 2 W 12 (14) 5 1 3	P53E	•	•			5/3-way solenoid valve  • Mid-position exhausted <sup>1)</sup> • Mechanical spring return


<sup>1)</sup> If neither solenoid coil is energised, the valve is moved to its mid-position by a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first

<sup>2)</sup> The symbol represents a valve with a proximity switch with a switching output signal, in the illustration an N/O contact. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. All sensors used here have an N/C contact as the switching element function.

Valve fun	ction						
1	Circuit symbol	Valve	Width			1	Description
SA	14 W 4 2 12 (14) 5 1 3	P53ED	18 mm	26 mm ■	42 mm	52 mm _	5/3-way solenoid valve, for special functions as switching position 14 is retained  • Pressureless switching, self-latching loop, pneumatic operation  • Mid-position exhausted, switching position 14 is retained  • Mechanical spring return
SB	14 W 4 2 14(12) (14) 5 1 3	P53AD	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 14 is retained  • Holding, blocking a movement (mechanically)  • Mid-position port 2 pressurised, port 4 exhausted, switching position 14 is retained  • Mechanical spring return
SD	12 W 4 2 12 12 12 12 12 13 13	P53BD	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 14 is retained  • Holding, blocking a movement (mechanically)  • Mid-position port 4 pressurised, port 2 exhausted, switching position 14 is retained  • Mechanical spring return
SE	14 -	P53EP	•	•	-	-	5/3-way solenoid valve, for special functions as switching position 12 is retained  • Pressureless switching, self-latching loop, pneumatic operation  • Mid-position exhausted, switching position 12 is retained  • Mechanical spring return
VG	14\\ 4\\ 2\\ (14\) \ 5\\ 1\\ 3	P53F	-	-	•	•	5/3-way solenoid valve  • Positioning  • Mid-position port 2 pressurised, port 4 closed <sup>1)</sup> • Mechanical spring return
VB	-	-	-	•	-	-	Vacuum generator with ejector pulse and adjustable air saving function (plate for 2 valve positions, sensor SDE3 with display and M12 connection)
L		-					For valve terminal only: Cover plate for vacant valve position

<sup>1)</sup> If neither solenoid coil is energised, the valve is moved to its mid-position by a mechanical spring. If the two coils are permanently energised one after the other, the valve remains in the switching position of the coil that was activated first.

### Vertical stacking



Additional function units can be added to each valve position between the base plate (manifold sub-base) and the valve.


These functions are known as vertical stacking modules and enable special functions or control of an individual valve position. It is possible to link several valve sizes on one valve terminal.



### Note

Certain combinations are not recommended due to the design of the individual vertical stacking components.

## Vertical stacking components

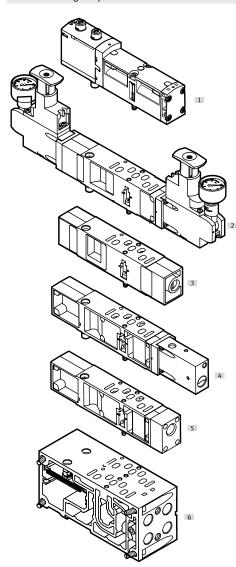


The following component sequence is recommended for valve positions with vertical stacking:

- [1] Valve VSVA
- [2] Pressure regulator plate
- [3] Throttle plate
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base

#### Vertical stacking

Pressure regulator plate



An adjustable pressure regulator can be installed between the base plate (manifold sub-base) and the valve to control the force of the triggered actuator.

This pressure regulator maintains a largely constant output pressure (secondary side) independent of pressure fluctuations (primary side) and air consumption. Also suitable for valves with a symmetrical coil layout.

Standard version:

- Standard port pattern to ISO 15407-2 or ISO 5599-2
- For pressure regulation up to 6 bar or up to 10 bar
- Without pressure gauge (optional)
- Regulator knob with 3 positions (locked, reference position, freely positionable)

### · 🖟 - Note

With the A, B and AB pressure regulators VABF-S...-1-..., the regulated pressure should not be less than 2 bar.

Use the reversible A, B or AB pressure regulators for regulated pressure of less than 2 bar.

## - Note

Please note when reordering pressure regulators in sizes 42 mm and 52 mm:


The part number on the regulator plate refers only to the standard version.


When reordering pressure regulators with additional features, such as a lockable rotary knob, extended design etc., only use the VABF configurator.

→ Internet: vabf-s2

## Rotary knob for pressure regulator for width 42 mm and 52 mm

Setting the pressure






- [1] Pull the rotary knob upward out of the locking position [1] into the setting position [2]
- [2] Set the required pressure at the setting position [2] using the rotary knob
- [3] After setting the pressure, push the rotary knob back down to the locking position [1]

### Rotary knob for pressure regulator for width 42 mm and 52 mm

Locking the rotary knob



[1] Locking element, pushed out

After setting the pressure, the rotary knob can be locked against unauthorised actuation.

To do this, the blue locking element is pushed out and secured with a pad-

The rotary knob is now fixed in place and cannot be moved.

## - 🛔

### Note

The position of the rotary knob using the locking element is determined by the pressure setting.

If a number of pressure regulators are installed next to one another, there may not always be enough space to push out the locking elements.

To ensure that the rotary knob can still be locked, it can be pulled off completely, rotated 60° or 120° and pushed back on.

### Vertical stacking

Energy efficiency through dual-pressure operation or through operation with reversible pressure regulators

Saving energy starts with compressed air generation. It is possible to achieve energy savings of up to 10% per 1 bar drop in pressure. Therefore, wherever possible reduce the pressure to the minimum required.

To save additional energy, you can operate valves in dual-pressure mode in a separate pressure zone.

To do this, the valves used must be operated in reverse mode, i.e. with reversed flow direction (see also information on → page 96). In dual-pressure operation, the valves are then supplied with pressure separately via ducts 3 and 5. The air is exhausted via duct 1.

Requirements for dual-pressure operation:

- Exhaust ducts 3 and 5 in the pressure zone are completely separate.
- Valves are used that can be operated in reverse mode.

# Advantages of dual-pressure operation:

It is possible to save energy if a valve can be supplied with different pressures. The advantages are:


- Saves energy because the return stroke can be carried out using reduced force, e.g. 3 bar instead of 6 bar.
- Just one valve is required, as in the case of vacuum application with ejector pulse for example (e.g. duct 3 for vacuum switching, duct 5 for the ejector pulse).
- A reduction in compressed air consumption of up to 50% is possible if two different pressures can be applied to the valve (return stroke uses reduces pressure).

### Advantages of reversible operation:

If compressed air is applied to the pressure regulator upstream of the valve (circuit diagram 2), exhausting is directly via the solenoid valve. This has the following advantages:


- Increased exhaust capacity, exhausting is up to 50% quicker
- Lower wear on the pressure regulator
- Can be adjusted very accurately, perfect for very low operating pressures
- No quick exhaust valves are required.
- Fast cycle times
- The pressure regulator can be adjusted independently of the valve position because operating pressure is permanently present at the pressure regulator.

### Dual-pressure operation with standard regulator

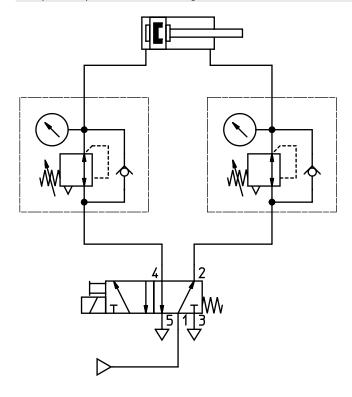

Circuit diagram 1:
Pressure is regulated downstream of the valve


### Dual-pressure operation with reversible regulator

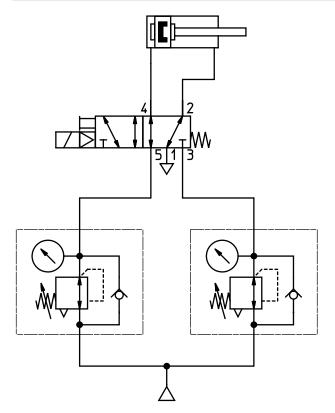

Circuit diagram 2: Pressure is regulated upstream of the valve

### Vertical stacking

Mode of operation of the pressure regulator plate (P regulator) for port 1; code: ZA, ZAY, ZF, ZFY

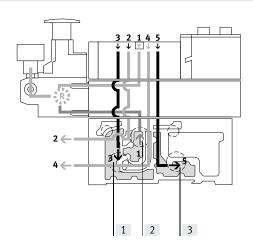

This pressure regulator regulates the pressure upstream of the valve in duct 1. Ducts 2 and 4 thus have the same regulated pressure.


During exhausting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5.

- Benefits
- · The pressure regulator is not affected by exhausting, since the pressure is regulated upstream of the
- · The pressure regulator can always be adjusted, since the pressure from the valve terminal is always present.
- [1] Duct 3 (exhaust air)
- Duct 1 (supply air)
- Duct 5 (exhaust air)

### Application examples

- · An equal working pressure is required at working ports 2 and 4.
- A working pressure (e.g. 3 bar) lower than the operating pressure present at the valve terminal (e.g. 8 bar) is required.

Mode of operation of the pressure regulator plate (AB regulator) for ports 2 and 4; code: ZD, ZDY, ZI, ZIY

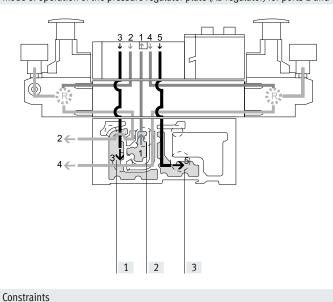

This pressure regulator regulates the pressure in ducts 2 and 4 after the pressure medium flows through the valve. During exhausting, the exhaust flow in the valve is from duct 2 to duct 3 and from duct 4 to duct 5 via the pressure regulator.

Example with the following switching position:

The working air flows from duct 1 of the manifold sub-base via the valve to duct 2, it is then regulated and made available at port 2 of the manifold subbase. At the same time, exhausting takes place via duct 4 of the manifold sub-base via the regulator and via the valve into duct 5 of the manifold subbase.

- [1] Duct 3 (exhaust air)
- Duct 1 (supply air)
- Duct 5 (exhaust air)

### Application examples

The pressure regulator cannot be adjusted in the exhaust position. For example, the pressure regulator for duct 4 cannot be adjusted


when the valve is pressurised in the switching position from duct 1 to duct 2 and exhausted from duct 4 to duct 5.

Two different working pressures are required at ports 2 and 4 instead of the

valve terminal operating pressure

### Vertical stacking

Mode of operation of the pressure regulator plate (AB regulator, reversible) for ports 2 and 4, reversible; code: ZE, ZEY, ZJ, ZJY

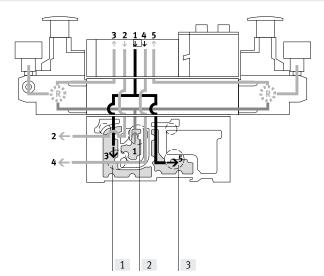

With this pressure regulator, the supply air (duct 1) is split and routed directly to both pressure regulators. In each case the regulated working air is present in ducts 3 and 5 on the valve. The valve is thus operated in reverse mode.

#### This means that:

- Duct 3 routes the working pressure to port 2
- Duct 5 routes the working pressure to port 4
- [1] Duct 3 (exhaust air)
- [2] Duct 1 (supply air)
- [3] Duct 5 (exhaust air)

Example with the following switching position:

The supply air in duct 1 is split between ducts 3 and 5 in the regulator and flows from here to the valve. In the valve, the working air is routed to port 2 of the manifold sub-base. The exhaust air is simultaneously routed via duct 4 of the manifold sub-base and via the valve to regulator duct 1, where it is split between ducts 3 and 5 and then discharged via the manifold sub-base.

## Application examples

- Two different pressures are required in ducts 2 and 4 instead of the valve terminal's operating pressure.
- Quick exhausting is required.
- The pressure regulator must always be adjustable.



#### Note

- Reversible pressure regulator plates should only be combined with valves that can be operated in reverse mode.
- Valves in valve positions with vertical pressure shut-off plates are operated with internal pilot air, even when the valve terminal is operated with external pilot air supply.
- The following combination of reversible valve terminals with vertical stacking components is not permitted:
- Reversible pressure regulator plates
- Throttle plates
- Vertical pressure shut-off plates
- Vertical supply plates

## Benefits

- Fast cycle times
- 50% higher exhaust flow rate, as air is not exhausted via the pressure regulator. The load on the pressure regulator is also reduced.
- No quick exhaust valves are required.
- Operating pressure is always present at the pressure regulator, as the pressure is regulated upstream of the valve, i.e. the regulator can always be adjusted.

## Disadvantages

- 2x 3/2-way solenoid valves (code N, K, H) cannot be used, as pressure is present at ports 3 and 5.
- A practical combination with a throttle plate is not possible.

	stacking – Pressure regulator plate, varia	I .	1				I		1
Code		Type	Width				Pressure up to	regulation	Description
			18 mm	26 mm	42 mm	52 mm	6 bar	10 bar	
Pressure	regulator plate for port 1 (P regulator)								
ZA	O	VABF-SR1C2-C-10	•	•	-		_	-	Regulates the operating pres-
ZAY <sup>2)</sup>		VABF-SR1C2-C-10E	-	•	•	•	-	•	sure in duct 1 upstream of the
ZF		VABF-SR1C2-C-6	-	•	•	•		-	solenoid valve
ZFY <sup>2)</sup>	14 5 1 3 12	VABF-SR1C2-C-6E	•	•	•	•	•	-	
Pressure	regulator plate for port 2 (B regulator)								
ZC	Control part 2 (5 regulator)	VABF-SR2C2-C-10		•	-		l –	•	Regulates the operating pres-
ZCY <sup>2)</sup>		VABF-SR2C2-C-10E	-	-	•	-	_	•	sure in duct 2 downstream of
ZH		VABF-SR2C2-C-6	•	•	•	•	-	_	the solenoid valve
ZHY <sup>2)</sup>		VABF-SR2C2-C-6E	•	•	•	•	•	-	
Pressure	regulator plate for port 4 (A regulator)								
ZB <sup>2)</sup>		VABF-SR3C2-C-10					T -		Regulates the operating pres-
ZG <sup>2)</sup>	14 5 1 3 12	VABF-SR3C2-C-6	•	•	•	•	•	-	sure in duct 4 downstream of the solenoid valve
D		1.43							
ZD	regulator plate for ports 2 and 4 (AB regu	VABF-SR4C2-C-10			-	•	T -	-	Regulates the working pressure
ZDY <sup>2)</sup>		VABF-SR4C2-C-10E	-	-	•	-	-	-	in ducts 2 and 4 downstream of
									the solenoid valve
ZI ZIY <sup>2)</sup>		VABF-SR4C2-C-6 VABF-SR4C2-C-6E	•	•	•	•	-		🖣 - Note
	14 5 1  3 12								These pressure regulator plates cannot be combined with reversible 2x 3/2-way solenoid valves (code P, Q, R).

<sup>1)</sup> Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2

<sup>2)</sup> Also suitable for valves with a symmetrical coil layout

# Valve terminal VTSA/VTSA-F, NPT


# Key features – Pneumatic components

Code		Туре	Width				Pressure up to	regulation	Description
			18 mm	26 mm	42 mm	52 mm	6 bar	10 bar	
Pressure	e regulator plate for port 2, reversible (B	regulator)							
ZL		VABF-SR6C2-C-10	•	•	•	•	-	•	Reversible pressure regulator for port 2
ZLY <sup>2)</sup>		VABF-SR6C2-C-10E	•	•	-	-	-	•	]
ZN		VABF-SR6C2-C-6	•	•	•	•	-	-	
ZNY <sup>2)</sup>	2) 14 5  1  3  12	VABF-SR6C2-C-6E	•	•	-	•	•	-	7
	regulator plate for port 4, reversible (A	<del></del>							
ZK <sup>2)</sup>		VABF-SR7C2-C-10	•	•	•	•	-	•	Reversible pressure regulator for port 4
ZM <sup>2)</sup>	14 5 1 1 3 12	VABF-SR7C2-C-6	•	•	•		•	-	
	regulator plate for ports 2 and 4, revers	ible (AB regulator)						,	
ZE		VABF-SR5C2-C-10	•	•	•		_	•	Reversible pressure regula for ports 2 and 4     Pressure regulation up- stream of the solenoid valv     Routes the operating pres-
ZEY <sup>2)</sup>	14 5  1   3 12	VABF-SR5C2-C-10E	•	•	•	•	-	•	sure from duct 1 to ducts 3 and 5  Routes the exhaust air from duct 1 to ducts 3 and 5
ZJ		VABF-SR5C2-C-6			•	•	•	-	- 🛔 - Note
									These pressure regulator plat cannot be combined with standard 2x 3/2-way solenoid valves (code N, K, H).
ZJY <sup>2)</sup>		VABF-SR5C2-C-6E	•	•	•	•	•	-	Reversible 2x 3/2-way solend valves (code P, Q, R) must not be operated in a separate procure zone in combination with these pressure regulators.

<sup>1)</sup> Width variants 42 mm and 52 mm (ISO 5599-2, ISO 1 and ISO 2) can be selected via the pressure regulator configurator VABF-S2
2) Also suitable for valves with a symmetrical coil layout

## Vertical stacking

Throttle plate



The throttle plate has two flow control valves on which the exhaust air flow rate at exhaust ports 3 or 5 can be adjusted.

This enables the movement of the drive to be initiated and the required speed to be set on the valve terminal using the manual override.

Ducts 3 and 5 can be adjusted independently of each other.




#### Note

On reversible valve terminals, the supply air is controlled in ducts 3 and 5 upstream of the valve.

Code		Туре	Width				Description		
			18 mm	26 mm	42 mm	52 mm			
X	14 5 1 3 12	VABF-S4F1B1-C	•	•	•	•	Restricts the exhaust air downstream of the valve in ducts 3 and 5		

## Vertical pressure shut-off plate



This is equipped with a switch with which the compressed air supply can be shut off. A solenoid valve or downstream vertical stacking plate can thus be replaced without switching off the overall air supply. If the control chain has a redundant connection, the cycle can continue even in the case of a cyclical control system.

After the shut-off function has been activated, the exhaust air/return air is discharged from the activated valve. This is done via an M5 threaded connection or via duct 3 in the case of width 18 and 26 mm, and via duct 3 in the case of width 42 and 52 mm.



#### Note

The operating pressure of the valve terminal must lie within the range of the required pilot pressure (i.e. min. 3 bar). When using the end plate with pilot air selector, only the switching position with code W and U can be used.

Code		Туре	Width				Description
			18 mm	26 mm	42 mm	52 mm	
ZT	33 11 15 14	VABF-S4L1D1-C	•	•	-	-	<ul> <li>3/2-way valve for shutting off the operating pressure at the valve position</li> <li>Blocks ducts 1 and 14 for the valve position</li> <li>Supplies the valve position with internal pilot air</li> </ul>
	12 3 1 5 14	VABF-S2L1D1-C	-	-	•	•	Pressure separation on the valve as- sembly
ZS	33 12 3 11 15 14	VABF-SL1D2-C	•	•	-	-	3/2-way valve for shutting off the operating pressure at the valve position     Blocks ducts 1 and 14 for the valve position     Supplies the valve position with internal pilot air     Pressure separation can be shut off on the valve assembly using a key




## Note

The vertical pressure shut-off plates VABF-... are provided only in combination with solenoid valves VSVA-...T1L from Festo. In the vertical pressure shut-off plate only ducts 1 and 14, and not duct 12, are blocked.

40

# Vertical supply plate




This plate enables a valve to be supplied with individual operating pressure independently of the operating pressure of the valve terminal.

As additional compressed air supply for a valve. To supply an additional pressure zone.

Code		Туре	Width				Description
			26 mm	18 mm	42 mm	52 mm	
ZU	14 5 1 3 12	VABF-SP1A3	•	•	•	•	Plate with port 11 for supplying individual operating pressure to a valve position, duct 1
ZV	11 14 5 1 3 12	VABF-SP1A14C	•	•	-	•	Plate with port 11 for supplying individual operating pressure to a valve position, ducts 1 and 14

## Compressed air supply and exhausting

Right end plate, internal pilot air supply




- Code V
- (no port 14)




Right end plate, external pilot air supply

• Code X




- Code V1, V3
- (port 14 is sealed with a blanking plug)



• Code X1, X3

## Right end plate with pilot air selector



- Code Z, Y, W, U
- Code Z: selector position 1, external pilot air supply
- Code Y: selector position 2, internal pilot air supply
- Code W: selector position 3, external pilot air supply (ducted)
- Code U: selector position 4, internal pilot air supply (ducted)

The valve terminal VTSA/VTSA-F can be supplied with compressed air at one or more points. This is a reliable way of ensuring that all functional components will always offer good performance, even with large-scale extensions.

The valve terminal is generally supplied via supply plates (max. 16 per valve terminal) and/or via the right end plate.

Exhausting is either via silencers or ports for ducted exhaust air on the supply plates and/or on the right end plate.

Supply plates, exhaust port 3/5 separated



• Code K

Supply plates, exhaust port 3/5 common



Code L

## Additional compressed air supply/duct separation

Additional supply plates can be used to ensure the compressed air supply for larger valve terminals or to create additional pressure zones.

These can be selected at any point upstream or downstream of the manifold sub-bases.

Supply plates contain the ports:

- Compressed air supply (1)
- Exhaust port (3/5) common or separate

Depending on your order, the exhaust ducts are either ducted or exhausted via silencers.

VTSA/VTSA-F with ducted exhaust air: When the exhaust air is ducted, exhausting can take place via a supply plate or a right end plate (code V or X). If duct separation is required, there are three different options:

- Duct separation 1, 3, 5: code S
- Duct separation 1: code T
- Duct separation 3, 5: code R

If a combination of duct separation (S, T or R) and one or two supply plates are required, the following variants can be selected:

- Supply plate with duct separation on the left: code SU, TU, RU
- Supply plate with duct separation on the right: code US, UT, UR
- 2 supply plates with intermediate duct separation: code USU, UTU, URU.

Supply	plates	1-	1,000				la
Code		Туре	Width 18 mm	26 mm	42 mm	52 mm	Description
U		Exhaust port 3/5 common VABF-S6-1-P1A7-N12     Exhaust port 3/5 separate VABF-S6-1-P1A6-N12	•	•	•	•	Supply plate without duct separation (no R, S or T selected)
SU TU RU			•	•	•	•	Supply plate with duct separation on the left, if R, S or T is selected
US UT UR			•	•	•	•	Supply plate with duct separation on the right, if R, S or T is selected
USU UTU URU			•	•	•	•	2 supply plates with duct separation in centre, if R, S or T selected

## Right end plate

Right end plates with different port sizes are available depending on the flow rate required.

With the following right end plates, the outlet direction of the ports is aligned with the horizontal stacking direction. Right end plates with pilot air supply/pilot exhaust air

- Internal pilot air supply: code V, V1, V2 and V3 (ducts 1 and 14 are connected)
- External pilot air supply: code X, X1 and X3, as well as XP1, XP2, XP3 and XS

For end plates with pilot air selector, the outlet direction of the ports is to the front of the valve terminal. This means that all the ports on the valve terminal can be combined in one outlet direction.

The special feature of the end plates with pilot air selector is the selector switch itself, which has four settings for different pilot air supply/pilot exhaust air.

End plates with pilot air selector switch set at the factory for:

- External pilot air supply: selector position 1 (code Z)
- Internal pilot air supply: selector position 2 (code Y)
- External pilot air supply, ducted pilot exhaust air: selector position 3 (code W)
- Internal pilot air supply, ducted pilot exhaust air: selector position 4
  (code U)



### - Note


- The end plate with pilot air selector must be used in combination with a supply plate.
- The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.
- Ducted pilot exhaust air via port 12 is only possible with rotated seals on the valve.

Right end p	olate, variants				
Code	Blanking plug in duct	Pilot air supply	Ducted pilot exhaust air 1)	Connecting thread	
			Position of the seal on solenoid valve ("ISO" is visible)	1, 3, 5	12, 14
٧	-	Internal	-	1/2 NPT	1/4 NPT
V1	14		-	3/4 NPT	1/4 NPT
V3	14		•	3/4 NPT	1/4 NPT
Х	-	External	-	1/2 NPT	1/4 NPT
X1	-		-	3/4 NPT	1/4 NPT
Х3	-		•	3/4 NPT	1/4 NPT
XP1 <sup>2)</sup>	1	External, via soft-start valve	-	1/2 NPT	1/4 NPT
XP2 3)	1, 14	("gradual pressure build-up")	-	1/2 NPT	1/4 NPT
XP3 <sup>3)</sup>	1, 3, 5, 14		-	1/2 NPT	1/4 NPT
XS <sup>4)</sup>	14	External, via pilot air switching valve ("switchable pilot air")	-	1/2 NPT	1/4 NPT


- 1) Pilot exhaust air is ducted on the end plate via port 12 and exhausted (done by turning the seal on the solenoid valve to position "ISO")
- 2) Not possible in combination with soft-start valve code PQ, PP, PO (with internal pilot air supply)
- 3) Not possible in combination with soft-start valve code PN, PM, PK (with external pilot air supply)
- $4) \qquad \text{Only possible in combination with pilot air switching valve code SS with intermediate plate code ZO} \\$

Right end pla	Right end plate with pilot air selector								
Code	Pilot air supply	Selector position	Ducted pilot exhaust air <sup>1)</sup> Position of the seal on solenoid valve ("ISO" is visible)	Connecting thread 12, 14					
Z	External	1	-	1/4 NPT					
Υ	Internal	2	-	1/4 NPT					
W	External (ducted)	3	•	1/4 NPT					
U	Internal (ducted)	4	•	1/4 NPT					

<sup>1)</sup> Pilot exhaust air is ducted on the end plate via port 12 and exhausted (done by turning the seal on the solenoid valve to position "ISO")

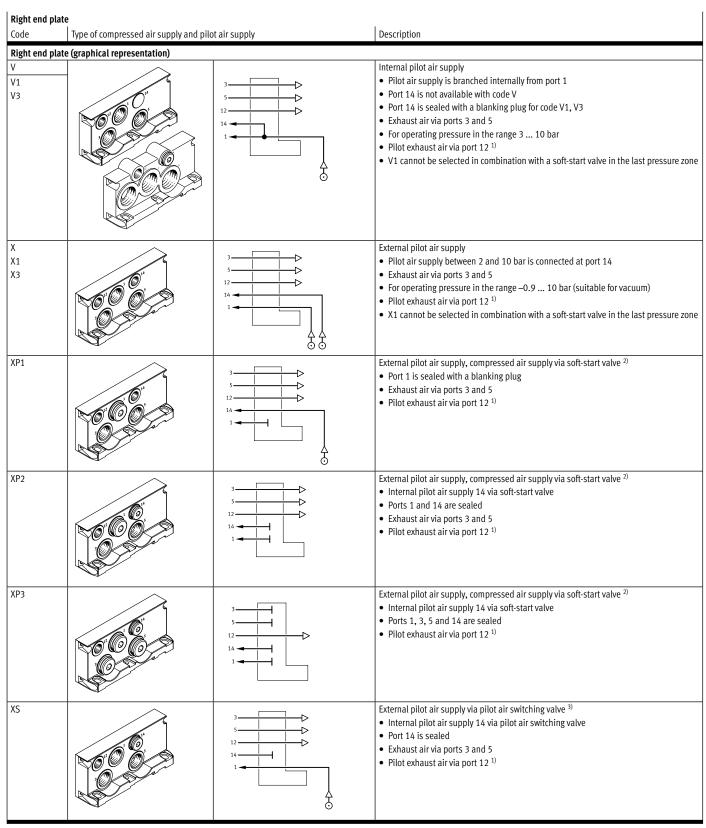

- 1) Ducted pilot exhaust air is only possible with rotated seals on the valve
- Application with XP1, XP2, XP3 and soft-start valve in combination with valves of width 52 mm: please note the maximum flow rate of the soft-start valve in this pressure zone
- 3) Application with XS and pilot air switching valve in combination with intermediate plate

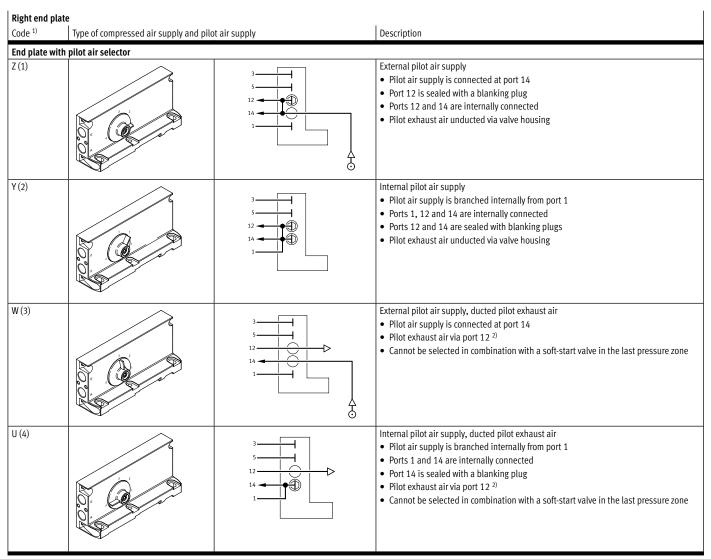

- 1) Selector setting in brackets
- 2) Ducted pilot exhaust air is only possible with rotated seals on the valve (pilot exhaust air 82/84 including venting air for valves)



The reversible 3/2-way solenoid valves (code P, Q, R) must only be operated in selector position 1 or 2.


Code			Connection (duct)	Designation	Code M Push-in connector, large	Code N Push-in connector, small
Right en	d plate					
√	600	3 5 12 14	1 3 and 5	Push-in fitting Silencer or Push-in fitting Silencer or Push-in fitting	QS-1/2-5/8-U U-1/2-B-NPT or QS-1/2-5/8-U U-1/4-B-NPT or QB-1/4-3/8-U	QB-1/2-1/2-U U-1/2-B-NPT or QB-1/2-1/2-U U-1/4-B-NPT or QB-1/4-5/16-U
(	600	3 5 12 14 14	1 3 and 5 12	Push-in fitting Silencer or Push-in fitting Silencer or Push-in fitting Push-in fitting	QS-1/2-5/8-U U-1/2-B-NPT or QS-1/2-5/8-U U-1/4-B-NPT or QB-1/4-3/8-U QB-1/4-3/8-U	QB-1/2-1/2-U U-1/2-B-NPT or QB-1/2-1/2-U U-1/4-B-NPT or QB-1/4-5/16-U QB-1/4-5/16-U
/1 /3		3 5 12 14	1 3 and 5 12	Barbed hose fitting Silencer or Barbed hose fitting Silencer or Push-in fitting Plug	N-3/4-P-19-NPT <sup>1)</sup> U-3/4-B-NPT <sup>1)</sup> or N-3/4-P-19-NPT <sup>1)</sup> U-1/4-B-NPT or QB-1/4-1/2-U B-1/4-NPT	U-1/4-B-NPT or QB-1/4-3/8-U B-1/4-NPT
<b>K1</b> <b>K3</b>		3 5 12 14 1	1 3 and 5 12	Barbed hose fitting Silencer or Barbed hose fitting Silencer or Push-in fitting Push-in fitting	N-3/4-P-19-NPT <sup>1)</sup> U-3/4-B-NPT or N-3/4-P-19-NPT <sup>1)</sup> U-1/4-B-NPT or QB-1/4-1/2-U QB-1/4-1/2-U	- - U-1/4-B-NPT or QB-1/4-3/8-U QB-1/4-3/8-U

<sup>1)</sup> For tubing with I.D. 19 mm. Use tubing clips to DIN 3017

Configura Code <sup>1)</sup>	ation of all pneumatic connections with	NPT thread	Connection	Designation	Code M Push-in connector, large	Code N Push-in connector, small
End plate Z (1)	with pilot air selector		12	Blanking plug	B-1/4-NPT	B-1/4-NPT
		3 5 12 14 1	14	Push-in fitting	QB-1/4-3/8-U	QB-1/4-5/16-U
Y (2)			12	Blanking plug	B-1/4-NPT	B-1/4-NPT
		3 5 12 14 1	14	Blanking plug	B-1/4-NPT	B-1/4-NPT
W (3)			12	Silencer	U-1/4-B-NPT	U-1/4-B-NPT
		3		or Push-in fitting	or QB-1/4-3/8-U	or QB-1/4-5/16-U
		12   14   1   1   1   1   1   1   1   1	14	Push-in fitting	QB-1/4-3/8-U	QB-1/4-5/16-U
U (4)			12	Silencer	U-1/4-B-NPT	U-1/4-B-NPT
		5———		or Push-in fitting	or QB-1/4-3/8-U	or QB-1/4-5/16-U
		12	14	Blanking plug	B-1/4-NPT	B-1/4-NPT

<sup>1)</sup> Selector setting in brackets

## Using the seals with ducted/unducted pilot exhaust air

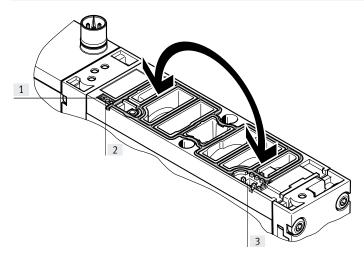

Unducted pilot exhaust air:

- The seal is visible in the display window on control side 14.
- The "ISO" mark is visible on the inscription label on the seal surface.

Ducted pilot exhaust air:

- The seal is visible in the display window on control side 12.
- The "ISO" mark is visible on the inscription label on the seal surface.
- [1] Inscription label
- [2] Display window on control side 14 ("ISO" is visible)
- [3] Display window on control side 12 ("ISO" is visible)

## Pilot air supply

The port for the pneumatic supply is located on the supply plates or the right end plate.

The ports differ for the following types of pilot air supply:

- Internal
- External

## Internal pilot air supply

Internal pilot air supply can be selected if the working pressure is between 3 and 10 bar.

In this case the pilot air supply is branched from the compressed air supply 1 using an internal connection. Port 14 is not available with code V and is sealed with a blanking plug for code V1, V3.

## - 🖣 - Note

If a gradual pressure build-up is required in the system by using a soft-start valve, then external pilot air should be selected so that the pilot pressure is already applied in full at the point of switch-on.

## External pilot air supply

If the supply pressure is less than 3 bar, you must operate your valve terminal VTSA/VTSA-F using external pilot air supply. The pilot air supply is then supplied via port 14 on the right end plate. This is the case even if the valve terminal is operated with different pressure zones.

## Creating pressure zones and separating exhaust air


The valve terminal VTSA/VTSA-F offers a number of options for creating pressure zones if different working pressures are required.

Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by appropriate duct separation. Compressed air is supplied and exhausted via a supply plate.

The position of the supply plates and duct separations can be freely selected for VTSA/VTSA-F.

Duct separations are integrated exworks as per your order.
Duct separations can be distinguished by their coding, even when the valve

terminal is assembled.



Code	Separating seal Illustrated examples	Coding	Basic representation	Width 18 mm	26 mm	42 mm	52 mm	Description
Г	illustrated examples		3 T	18 IIIIII	26	42 111111	52	Duct 1 separated
5	5 1 3		S 3	•	•	•	•	Ducts 1, 3 and 5 separate
8			R 3 — — — — — — — — — — — — — — — — — — —	-	•	-	-	Ducts 3 and 5 separate
Ί		Colour-coded in red	TL 3 5 12 14 1	•	•	•	•	Duct 1 and 14 separated
(	5 1 3	Colour-coded in green	3	•	•	•	•	Ducts 1, 3, 5 and 14 separate
-		Colour-coded in white	12 14 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	•	•	•	•	Duct 14 separated

## Example: Compressed air supply and pilot air supply, right end plate


Internal pilot air supply, silencer/ducted exhaust air

Right end plate: code V and V1

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply:

- Port 14 is not available with code V and is sealed with a blanking plug for code V1.
- The air is exhausted via the silencer at exhaust port 3/5.
- Duct separations can optionally be used to create pressure zones.

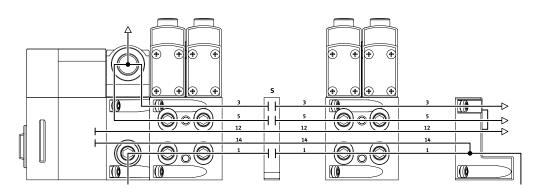

## Example: Compressed air supply and pilot air supply, right end plate


External pilot air supply, silencer/ducted exhaust air

Right end plate: code X and X1

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply:

- Port 14 on the right end plate is equipped with a fitting for this.
- The air is exhausted via the silencer at exhaust port 3/5.
- Duct separations can optionally be used to create pressure zones.

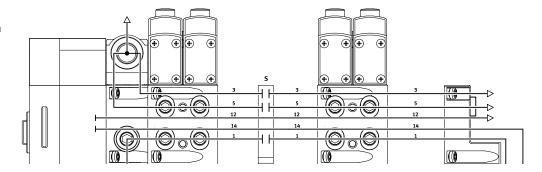

# Key features – Pneumatic components – Compressed air supply and pressure zones, examples

## Example: Compressed air supply and pilot air supply via end plate with pilot air selector


Internal pilot air supply, ducted exhaust air/silencer

Right end plate: code U

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with internal pilot air supply:

- Port 14 on the right end plate is tightly sealed.
- The air is ducted or discharged via the silencer at exhaust port 3/5.
- The selector switch on the pilot air selector is in position 4.
- Duct separations can optionally be used to create pressure zones.

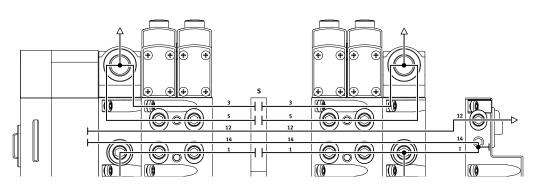

## Example: Compressed air supply and pilot air supply via end plate with pilot air selector


External pilot air supply, ducted exhaust air/silencer

Right end plate: code Z

Optional duct separation

The adjacent diagram shows an example of the configuration and connection of the compressed air supply with external pilot air supply:

- Port 14 on the right end plate is equipped with a fitting for this.
- Port 12 is sealed with a blanking plug since it is internally connected with port 14.
- The air is ducted or discharged via the silencer at exhaust port 3/5.
- The selector switch on the pilot air selector is in position 1.
- Duct separations can optionally be used to create pressure zones.

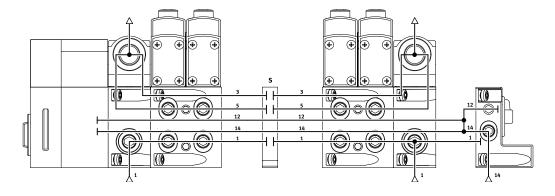


# Key features – Pneumatic components – Compressed air supply and pressure zones, examples

## **Examples: Creating pressure zones**

VTSA/VTSA-F with CPX terminal

With the VTSA/VTSA-F, up to 16 pressure zones can be created (up to 32 pressure zones if only size 1, ISO 5599-2, is fitted). The diagram shows an example of the configuration and connection of three pressure zones using duct separations – with internal pilot air supply.

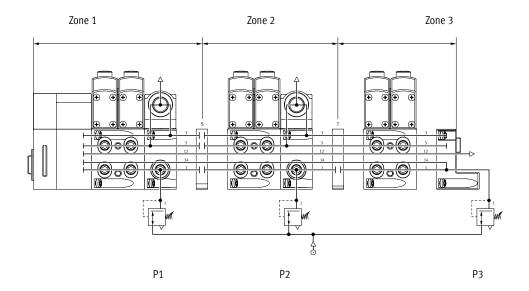



Examples with pressure zones and soft-start valve are described separately in the chapter "Soft-start valve"

→ page 167.

# Key features - Mounting

## Valve terminal mounting


Sturdy valve terminal mounting thanks to:

- Through-holes for wall mounting
- Additional mounting brackets
- DIN rail mounting for VTSA/VTSA-F (horizontal mounting position permitted)



Further information on mounting the valve terminal, arranged by valve terminal configuration, can be found online.

Wall mounting, general

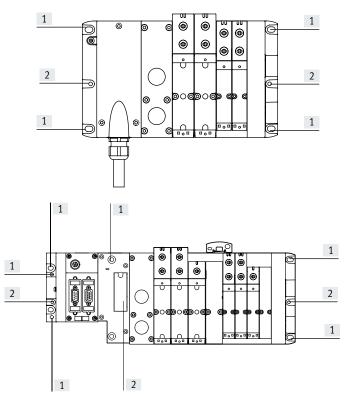

- [1] Drilled hole for M6 screw
- [2] Drilled hole for DIN rail mounting

The valve terminal VTSA/VTSA-F is screwed onto the mounting surface using M6 screws. The mounting holes are located at the following points:

- Multi-pin plug
  - 2 each on the multi-pin manifold block and the right end plate
- Fieldbus, CPX:
- 2 each on the left (CPX) and right (VTSA/VTSA-F) end plate and the pneumatic interface
- I-Port/IO-Link<sup>®</sup> (4 pieces); 2 each on the I-Port/IO-Link<sup>®</sup> interface and on the right end plate

Mounting brackets can be mounted on pneumatic supply plates and manifold sub-bases. If using CPX components, see:

→ Internet: cpx




Wall mounting of the VTSA/VTSA-F with more than five pneumatic modules

Note the following instructions:

- Additionally use mounting brackets of the type VAME-S6-W-M46
- Mount these on each fourth plate (manifold sub-base, supply plate or exhaust plate), counting from left to right, starting after the pneumatic interface.
- No mounting bracket is required next to the right end plate.
- Always use the pre-assembled mounting brackets when mounting factory pre-assembled valve terminals on a wall.

Wall mounting with CPX polymer design

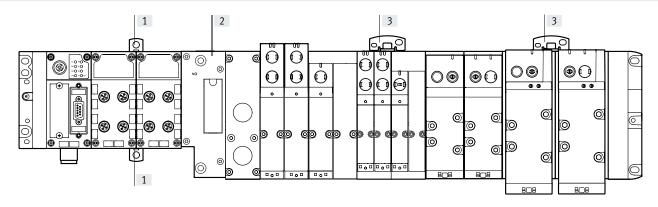

- [1] Additional wall mounting for polymer CPX terminal
- [2] Pneumatic interface

These mountings are clipped in at the top and bottom between the CPX modules.

- In the case of polymer CPX terminals with 4 and more interlinking blocks, additional wall mountings of the type CPX-BG-RW must be used every 100 ...150 mm.
- [3] Additional wall mounting for VTSA/VTSA-F


(with drilled hole for M5 and M6 screw)

In the case of the VTSA/VTSA-F, mounting brackets must be mounted on the wall as instructed above.

Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

# Key features - Mounting

## Wall mounting with CPX metal design

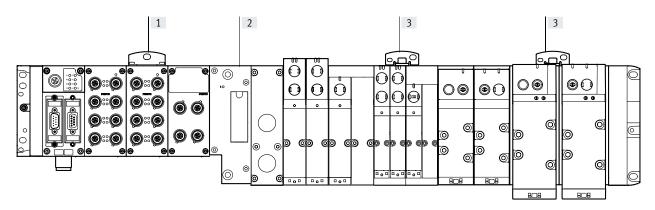

- [1] Additional wall mounting for CPX metal design
- [2] Pneumatic interface
- [3] Additional wall mounting for VTSA/VTSA-F
- (with drilled hole for M5 and M6 screw)


In the case of metal CPX terminals with 4 and more interlinking blocks, additional wall mountings of the type CPX-M-BG-RW must be used every 100 ...150 mm.

These wall mountings are screwed in at the top of the corresponding CPX module.

In the case of the VTSA/VTSA-F, mounting brackets must be mounted on the wall as instructed above.

Brackets of the type VAME-S6-W-M46 must be used as an additional wall mounting.

## Mounting on support system with CPX metal design

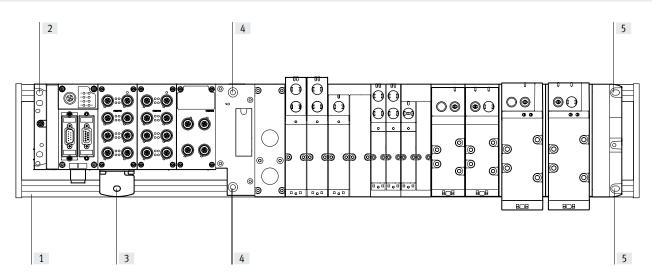

- [1] Support system (DIN mounting rail)
- [2] Upper mounting for metal CPX, left end plate on DIN mounting rail

nects the metal terminal CPX to the DIN mounting rail.

- [3] Lower mounting for metal CPX on DIN mounting rail with mounting bracket CPX-M-BG-VT-2X
- [4] Mounting for pneumatic interface on DIN mounting rail
- [5] Mounting for right end plate on DIN mounting rail

If a metal terminal CPX with VTSA pneumatic components is mounted on DIN mounting rails, it may be necessary to have one or more mounting brackets on the CPX side to compensate for the length. It is possible to compensate for the length by using special mounting brackets CPX-M-BG-VT-2X. The mounting bracket con-




- Only metal CPX modules with VTSA/VTSA-F modules of width 18 ... 52 mm must be used.
- The number of mounting brackets required depends on the number of CPX modules installed and whether any system feeds are present.

Further information about mounting the valve terminal can be found in the assembly instructions on the Festo Support Portal

→ www.festo.com/sp

# Key features – Mounting

DIN rail mounting



The valve terminal VTSA/VTSA-F is hooked onto the DIN rail (see arrow A). It is then swivelled onto the DIN rail and secured in place with the clamping component (see arrow B).

The following VTSA/VTSA-F mounting is required for DIN rail mounting of the valve terminal:

• CPX-CPA-BG-NRH


This enables the valve terminal to be mounted on a DIN rail to EN 60715.



## Note

- Wall mounting is recommended if more than one vertical stacking element or a long valve terminal design is required.
- Vibration/shock loads are not permitted for DIN rail mounting.
- Only horizontal installation is permitted for DIN rail mounting.

## Individual valve mounting



[1] Vertical mounting holes

The individual sub-base for wall mounting is designed to be integrated in a system or machine. It is mounted vertically.

## Display and operation

Each solenoid coil is allocated an LED which indicates its switching status.

- Indicator 12 shows the signal status of the pilot control for output 2
- Indicator 14 shows the signal status of the pilot control for output 4

## Manual override (MO):

The manual override enables the valve to be switched when not electrically actuated or energised.

The valve is switched by pushing the manual override. The set switching status can also be locked by turning the manual override.


#### **Alternatives:**

- The cover cap (code N) limits the function of the manual override, preventing it from being locked. The valve can then only be actuated as non-detenting.
- The cover cap (code V) can be used to secure the manual override against accidental actuation.
- The heavy-duty cover cap protects the manual override located on the valve. The valve can be actuated as non-detenting or as detenting via accessory.



Special valve variants with pre-assembled cover caps for the manual override are available for valve terminal VTSA/VTSA-F.

#### Pneumatic connection and control elements

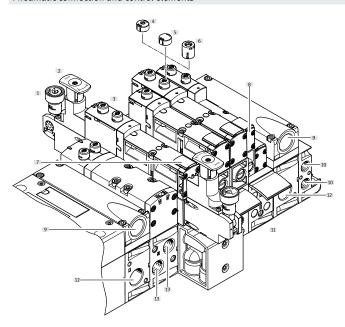


- 1] Pressure gauge (optional)
- [2] Adjusting knob for optional pressure regulator plate
- [3] Manual override (MO) (for each pilot solenoid coil, non-detenting or non-detenting/detenting)
- [4] Cover cap for MO, non-detenting
- [5] Cover cap for MO, concealed
- [6] Cover cap for MO, non-detenting, heavy-duty, detenting via accessory
- [7] Inscription label holder for valve
- [8] Adjusting screw of optional throttle plate
- [9] Exhaust ports "Valves" (3/5)

- [10] Pilot ports 12 and 14 for supplying the external pilot air
- [11] Inscription label holder for subbase
- [12] Supply port 1 (operating pressure)
- [13] Working ports 2 and 4, per valve position

## - 🖣 - Note


A manually operated valve (manual override) cannot be reset electrically. Conversely, an electrically actuated valve cannot be reset using the mechanical manual override.

## Electrical connection and display elements

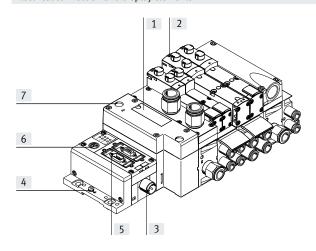

- [1] Inscription area and covering for DIN rail mounting
- [2] Yellow LEDs: signal status indication for the pilot solenoid coils
- [3] Power supply connection
- [4] Earthing connection
- [5] Fieldbus interface (bus-specific)
- [6] Service interface
- [7] Red LED: common error display for valves


Electrical connection and display elements for AP interface

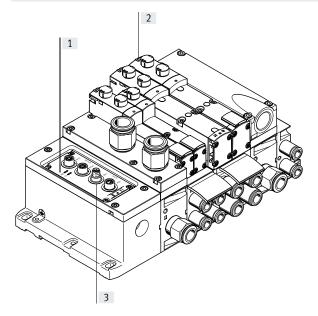

- [1] LED indicators for operating status/diagnostics of the pneumatic interface
- [2] Yellow LEDs: signal status indication for the pilot solenoid coils
- [3] AP interface with connections

#### Manual override (MO) - Function

MO with automatic return (non-detenting)




- [1] Press in the plunger of the manual override using a pointed object or screwdriver. The valve is in the switching posi-
- Remove the pointed object or [2] screwdriver. The spring force pushes the

tion.

plunger of the manual override The valve returns to its normal po-

sition (not with double solenoid valve code J or D).

## MO with detent (concealed)



- [1] Press in the plunger of the manual override using a pointed object or screwdriver until the valve switches and then turn the plunger 90° clockwise until the stop is reached.
  - Valve remains in the switching position.
- Turn the plunger 90° anti-clockwise until the stop is reached and then remove the pointed object or screwdriver. The spring force pushes the plunger of the manual override back. The valve returns to its normal position (not with double solenoid valve code J or

## Cover caps for manual override

Cover cap for MO, heavy-duty, with automatic reset (non-detenting/detenting via accessory)



[1] Non-detenting:

Push in key for MO. The valve is in the switching position. Detenting:

Turn the coded key in switching position clockwise through 90° until the stop is reached. Valve remains in the switching position. In this position the key is latched and cannot be removed.

until the stop is reached. The key is now unlatched. The spring force of the manual override pushes the key back out. The valve returns to its normal position (not with double solenoid valve code J





[1] Restricted function, non-detenting: push in the plunger of the MO cap using a pointed object or screwdriver. The valve is in the switching position.



[2] Turn the key 90° anti-clockwise or D).



[2] Remove the pointed object or screwdriver.

> The spring force pushes the plunger of the manual override hack.

The valve returns to its normal position (not with double solenoid valve code J or D).

## Cover cap for MO, concealed



When concealed by the cover cap, the MO can be secured against accidental actuation.



Cover caps for the manual override can be ordered separately as accessories. There are also variants of the valves VSVA with pre-assembled cover caps.

Overview of valve variants and co	over caps for	manual override (MO)		
Illustration	Terminal code	Description of valve terminal order code	Manual override (MO)	Valve code identification on the rating plate sticker <sup>1)</sup>
Solenoid valve VSVA without cov	er cap			
	R	Without cover cap on MO	Non-detenting, detenting	VSVA-BMZD
Solenoid valve VSVA with ready-1	itted cover c	ap on MO		
	В	MO non-detenting/heavy duty with cover cap, can be used as detenting via accessory (key), as valve variant	Non-detenting, detenting via accessory (key)	VSVA-BMZTR
	С	MO can only be used as non-detenting with coded cover cap, as valve variant	Non-detenting	VSVA-BMZH
	D	MO concealed by cover cap – operation of MO prevented, as valve variant	Concealed	VSVA-BMZ
Cover caps for MO				
©	N	MO can only be used as non-detenting with coded cover cap	Non-detenting	VSVA-BMZD
	V	MO concealed by cover cap – use of MO prevented	Concealed	VSVA-BMZD
	A	MO non-detenting/heavy duty with cover cap, detenting via accessory (key)	Non-detenting, detenting via accessory	VSVA-BMZD
Accessories for manual override,	heavy duty			
	_	Coded key (accessory) for actuating the MO, non-detenting/heavy duty, for detenting position	For manual override, detenting	

 $<sup>1) \</sup>quad \text{As an example, the part code for a 5/2-way single solenoid valve, mechanical spring return is used here (e.g. VSVA-B-M52-MZTR-A2-1T1L)} \\$ 




## - Note

Cover caps for non-detenting/heavy duty manual override, detenting via accessory, are provided for one-off use only.

If they are used more than once, reliable locking of the cover cap cannot be guaranteed.

## Inscription system

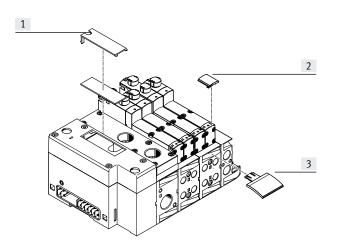

- [1] Inscription area (approx. 20 x 45 mm)
- 2] Inscription label holder for valve ASCF-T-S6 (17 x 12.5 mm), ASCF-T-S6-Z
- [3] Inscription label holder for manifold sub-base ASCF-M-S6, ASCF-M-S2-2

Inscription label holders can be applied to the valves and manifold sub-bases to identify them. They can be ordered by entering the code B or T in the order code for accessories. Scope of delivery: inscription label holder including inscription label. The following inscription labels can be used as spares:

- Inscription label holder for valve type ASCF-T-S6: part no. 540888
- Inscription label holder with additional fields for marking valve type ASCF-T-S6-Z: part no. 8106532


- Inscription label holder for manifold sub-base type ASCF-M-S6: part no. 540889
- Inscription label holder for manifold sub-base (for valve width 52 mm) type ASCF-M-S2-2: part no. 562577 Large inscription labels can be attached to the pneumatic interface as an alternative or in addition to the smaller labels.

## **Protective circuit**


Each solenoid coil VSVA is provided with a spark arresting protective circuit and protected against polarity reversal.

The 24 V DC version of width 52 mm additionally features integrated holding current reduction.

## 24 V DC version (width 18 to 42 mm)

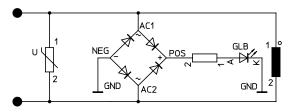

## 24 V DC version (width 52 mm)

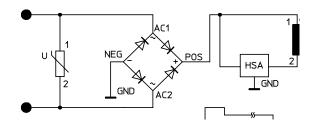

## · 🖢 - Note

All control signals of the solenoid coils of a valve terminal share a common load (independent of whether multi-pin, AS-i or CPX).

#### Individual valve

Valves on individual sub-bases can be used for actuators that are further away from the valve terminal.

- Electrical connection M12, 4-pin 24 V DC
- 4-pin clamped terminal connection for configuration by the user 24 V DC
- Cable (open end) for configuration by the user 24 V DC

#### Individual electrical connection

A maximum of 20 solenoid coils can be actuated. 2 solenoid coils per valve can be addressed.

Individual electrical connection:

- M12
- 6-way or 10-way
- 5-pin
- 24 V DC

## Electrical multi-pin plug connection

The following multi-pin plug connection variants are offered for the valve terminal VTSA/VTSA-F:

- Sub-D multi-pin plug connection
   (37-pin for 24 V DC): This valve terminal can be equipped with
   1 ... 16 valve positions (with double solenoid valves), or with
   1 ... 32 valve positions (with single solenoid valves). A maximum of
   32 solenoid coils can be actuated.
- Terminal box (terminal strip for 24 V DC): This valve terminal can be equipped with 1 ... 16 valve positions (with double solenoid valves), or with 1 ... 32 valve positions (with single solenoid valves).

A maximum of 32 solenoid coils can be actuated.

Multi-pin node (round plug): electrical multi-pin plug connection with round plug, 19-pin to CNOMO
 E03.62.530.N, connecting thread M23 for 24 V DC. The valve terminal can be fitted with max. 16 solenoid coils.

The valves are switched by positive or negative logic (PNP or NPN). Mixed operation is not permissible because all control signals of the solenoid coils of a valve terminal share a common load.

Each pin on the multi-pin plug (Sub-D) or terminal box (terminal strip) can actuate exactly one solenoid coil. If the maximum configurable number of valve positions is 32, this means that 32 valves can be addressed, each with a single solenoid coil.

With 16 or fewer valve positions, 2 solenoid coils per valve can be addressed.

# - Note

Use the following 37-pin connecting cables from Festo to connect the valve terminal VTSA/VTSA-F with Sub-D multi-pin plug connection:

- NEBV-...-LE10 for max. 8 solenoid coils
- NEBV-...-LE26 for max. 22 solenoid coils
- NEBV-...-LE27 for max. 23 solenoid coils
- NEBV-...-LE37 for max. 32 solenoid coils
- NECV-S1W37 pre-assembled plug connector

#### **AS-Interface connection**

Valve terminals VTSA/VTSA-F with AS-Interface connection can be expanded with up to 8 valves with max. 8 solenoid coils.

The valve terminal with AS-Interface connection is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multi-pin plug connection can be converted using an AS-Interface module.
The technical specifications of the AS-Interface system must be observed in this case.

## - 🎚 -

## Note

AS-Interface module VAEM-S6-S-FAS-4-4E Always operate the AS-Interface module with additional power supply if 4 solenoid coils (width 52 mm) are supplied with current simultaneously. More information can be found at:

→ Internet: as-interface

## Fieldbus interface/control block

All functions and features of the electrical peripherals CPX are permitted in connection with the CPX interface. This means that:

- The valves and electrical outputs are supplied via the operating voltage connection CPX
- The valves are supplied and switched off independently via a separate connection on the CPX

# - 🖣 - Note

More information can be found at:

→ Internet: cpx

## I-Port/IO-Link®

Valve terminals VTSA/VTSA-F with I-Port/IO-Link® connection can be expanded with up to 16 valves with max. 32 solenoid coils.

The valve terminal with I-Port/IO-Link® connection is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multipin plug connection can be converted using an I-Port/IO-Link® module.
The technical specifications of the I-Port/IO-Link® system must be observed in this case.



## Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if max. 4 solenoid coils (width 52 mm) are simultaneously supplied with current. More information can be found at:

## → Internet: i-port, io-link

## AP interface

VTSA/VTSA-F valve terminals with AP interface can be expanded with up to 12 valves with a maximum of 24 solenoid coils.

The valve terminal with AP interface is based on the same electrical links as the valve terminal with multi-pin plug connection.

This means a valve terminal with multipin plug connection can be converted using an AP interface.

The technical specifications of the AP interface must be observed in this case.



## Note

AS-i module VAEM-S6-S-FAS-4-4E. Always operate the AS-i module with additional power supply if max. 4 solenoid coils (width 52 mm) are simultaneously supplied with current. More information can be found at:

→ Internet: ap

## Rules for addressing

Address allocation

Address allocation doesn't depend on whether single or double solenoid valves are fitted.

Addresses are assigned in ascending order without gaps, from left to right.

Single solenoid valve

A valve position for actuating one solenoid coil (VABV...T1) occupies one address. Double solenoid valve

A valve position for actuating two solenoid coils (VABV...T2) occupies two addresses. The following allocation applies in this case:

- Coil 14: lower-value address
- Coil 12: higher-value address

## Connecting cable

The wire colours refer to the following pre-assembled connecting cables from Festo:

- NEBV-...-LE10 for valve terminal with max. 8 solenoid coils
- NEBV-...-LE26 for valve terminal with max. 22 solenoid coils
- NEBV-...-LE27 for valve terminal with max. 23 solenoid coils
- NEBV-...-LE37 for valve terminal with max. 32 solenoid coils

		Pin <sup>2)</sup>	Address/coil	Wire colour 1)	Pin <sup>2)</sup>	Address/coil	Wire colour 1)
		1	0	WH	17	16	WH PK
DIN 4		2	1	BN	18	17	PK BN
PIN 1 +	PIN 20	) 3	2	GN	19	18	WH BU
	0 0	4	3	YE	20	19	BN BU
		5	4	GY	21	20	WH RD
		6	5	PK	22	21	BN RD
		7	6	BU	23	22	GY GN
		8	7	RD	24	23	YE GY
		9	8	GY PK	25	24	PK GN
		10	9	RD BU	26	25	YE PK
		11	10	WH GN	27	26	GN BU
		12	11	BN GN	28	27	YE BU
		13	12	WH YE	29	28	GN RD
		14	13	YE BN	30	29	YE RD
IN 40	L° → PIN 3'	7 15	14	WH GY	31	30	GN BK
'IN 19 -		16	15	GY BN	32	31	GY BU
<u> </u>		Conduc	tor	l	 	I	
- Note		33	0 V <sup>3)</sup>	YE BK	35	0 V <sup>3)</sup>	BN BK
Irawing sho	ws a plan view of the Sub	D 34	0 V <sup>3)</sup>	WH BK	36	0 V <sup>3)</sup>	BK
•	e connecting cable NEBV-		g				
	<b>0</b>	37	FE	VT	-	_	-

<sup>1)</sup> To IEC 757

<sup>2)</sup> Pin 9 ... 35: not allocated in the case of connecting cable NEBV-...-LE10 Pin 23 ... 33: not allocated in the case of connecting cable NEBV-...-LE26 Pin 24 ... 33: not allocated in the case of connecting cable NEBV-...-LE27

Connect O V for positive-switching control signals, 24 V for negative-switching control signals, a valve terminal share a common load!

54

41

# Dimensions Connecting cable NEBV.... [1] Cable connector M20x1.5 Type B1 H1 H2 H3 L1 L2

	Cable sheath	Connecting cable	Length [m]	Part no.	Туре
$\sim$	TPE-U(PUR)	For max. 8 solenoid coils, 10-core	2.5	539240	NEBV-S1W37-E-2.5-LE10
			5	539241	NEBV-S1W37-E-5-LE10
			10	539242	NEBV-S1W37-E-10-LE10
	<u>,                                    </u>	For max. 22 solenoid coils, 26-core	2.5	539243	NEBV-S1W37-E-2.5-LE26
<b>V</b>	´		5	539244	NEBV-S1W37-E-5-LE26
			10	539245	NEBV-S1W37-E-10-LE26
		For max. 32 solenoid coils, 37-core	2.5	539246	NEBV-S1W37-K-2.5-LE37
			5	539247	NEBV-S1W37-K-5-LE37
			10	539248	NEBV-S1W37-K-10-LE37
	PVC	For max. 8 solenoid coils, 10-core	2.5	543271	NEBV-S1W37-KM-2.5-LE10
			5	543272	NEBV-S1W37-KM-5-LE10
			10	543273	NEBV-S1W37-KM-10-LE10
		For max. 23 solenoid coils, 27-core	2.5	543274	NEBV-S1W37-KM-2.5-LE27
			5	543275	NEBV-S1W37-KM-5-LE27
			10	543276	NEBV-S1W37-KM-10-LE27
		For max. 32 solenoid coils, 37-core	2.5	543277	NEBV-S1W37-KM-2.5-LE37
			5	543278	NEBV-S1W37-KM-5-LE37
			10	543279	NEBV-S1W37-KM-10-LE37

36

11.6

142

27

NEBV-..

	Terminal	Coil/address	Terminal	Coil/address
ach solenoid coil is assigned to a specific terminal on the terminal strip n order for the valves to be actuated.				
	1	0	17	16
	2	1	18	17
0 19	3	2	19	18
	4	3	20	19
┎ <del>╎┈┈┈┈┈┈┈┈┈┈┈┈┈┈┈</del> ╢	5	4	21	20
	6	5	22	21
	7	6	23	22
	8	7	24	23
	9	8	25	24
	10	9	26	25
	11	10	27	26
0V <sup>1)</sup> 20 31	12	11	28	27
04 20 31	13	12	29	28
	14	13	30	29
	15	14	31	30
	16	15	32	31
- Note	Conductor			
ne drawing shows a plan view of the multi-pin terminal strip (Cage	33	0 V	35	0 V
lamp).	34	0 V	36	0 V

Pin allocation – Multi-pin, round plug, 24 V DC; electrical control code MP4							
	Address	Pin <sup>1)</sup>		Address	Pin <sup>1)</sup>		
	0	15		8	17		
	1	7		9	9		
// <sub>4</sub> <sup>5</sup> + + + / <sub>8</sub>	2	5		10	2		
$\left( \left( \frac{4}{24} + \frac{4}{49} + \frac{45}{49} + \frac{4}{49} + \frac{8}{49} \right) \right)$	3	4		11	13		
$\left( \left( \begin{array}{cc} 3 + & \frac{4}{12} + \frac{4}{12} + \frac{9}{12} \\ \frac{4}{12} & \frac{4}{12} & \frac{4}{12} \end{array} \right) \right)$	4	16		12	11		
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	5	8		13	10		
1 12 11	6	3		14	1		
	7	14		15	18		


Pin allocation – Multi-pin plug, round plug, 24 V DC; electri	Pin	Valve position/sole- noid coil	Pin	Valve position/sole- noid coil
	1	8/14	11	7/14
	2	6/14	12	FE
	3	4/14	13	6/12
110 120 10 2	4	2/12	14	4/12
/ //10 17 <sub>0</sub> 19 0 3 \\\	5	2/14	15	1/14
	6	0 V <sup>1)</sup>	16	3/14
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	7	1/12	17	5/14
O7 O6 O5	8	3/12	18	8/12
	9	5/12	19	Not assigned
	10	7/12		


<sup>1)</sup> Pin 6: 0 V for positive-switching control signals; connect 24 V for negative-switching control signals; mixed operation is not permitted!

Pin 12: earth

Pin 19: not allocated

## Electrical connection, individual valve 24 V DC up to width 52 mm





Pin assignment for assembly by the

user

With positive logic:

Pin1 – Not allocated

Pin2 – U<sub>B</sub> for coil 12

Pin3 - 0 V for coil 12 and 14

Pin4 – U<sub>B</sub> for coil 14

With negative logic:


Pin1 - Not allocated


Pin2 - 0 V for coil 12

Pin3 - U<sub>B</sub> for coil 12 and 14

Pin4 - 0 V for coil 14

## Individual electrical connection, 6-way or 10-way, 24 V DC, code MP2/MP3 for valve terminal up to width 52 mm





[1] Connection plug M12x1, 5-pin

Pin assignment M12 With positive logic:

Pin1 - Not allocated

Pin2 – U<sub>B</sub> for coil 12

Pin3 - 0 V for coil 12 and 14

Pin4  $-U_B$  for coil 14

Pin5 – Functional earth

Pin assignment M12

With negative logic:

Pin1 - Not allocated

Pin2 - 0 V for coil 12

Pin 3  $-U_B$  for coil 12 and 14

Pin4 - 0 V for coil 14

Pin5 - Functional earth



- Mixed operation of positive-switching (PNP) and negative-switching (NPN) control signals is not permissible because all control signals of the solenoid coils of a valve terminal share a common load.
- All M12 connections (MP2/MP3) within a valve terminal share a common load.

## Instructions for use

## **Operating materials**

Operate your system with unlubricated compressed air, if possible. Festo valves and cylinders are designed so that, if used as intended, they will not require additional lubrication and will still achieve a long service life.

The quality of compressed air downstream of the compressor must correspond to that of unlubricated compressed air. If possible, do not operate the entire system with lubricated compressed air. The lubricators should, where possible, always be installed directly upstream of the actuator requiring them.

Incorrect additional oil and too high an oil content in the compressed air reduce the service life of the valve terminal.

Use Festo special oil OFSW-32 or the alternatives listed in the Festo catalogue (as specified in DIN 51524 HLP32; basic oil viscosity 32 CST at 40°C).

## **Bio-oils**


When using bio-oils (oils which are based on synthetic or native esters, e.g. rapeseed oil methyl ester), the maximum residual oil content of 0.1 mg/m³ must not be exceeded (see ISO 8573-1:2010 Class 2).

## Mineral oils

When using mineral oils (e.g. HLP oils to DIN 51524, parts 1 to 3) or similar oils based on poly-alpha-olefins (PAO), the maximum residual oil content of 5 mg/m³ must not be exceeded (see ISO 8573-1:2010 Class 4).

A higher residual oil content is not permitted, regardless of the compressor oil, because the permanent lubrication would otherwise be flushed out over a period of time.

Control signals from the controller to the valve terminal are transmitted via the AP bus protocol from Festo.

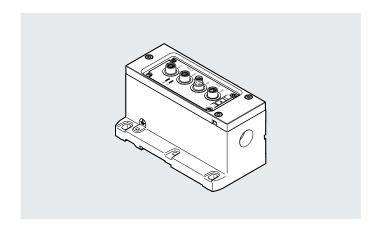

## Application

The AP interface connects the VTSA valve terminal with up to 12 valves (24 valve coils) to a CPX-AP system.

## Implementation

The AP interface is used for direct integration of the VTSA valve terminal into the decentralised IO system.

General technical data				
AP interface				
Connection position	On top			
Reverse polarity protection	Yes			
Number of pins/cores	4			
Maximum number of valve positions	12			
Max. no. of solenoid coils	24			

General data	
Diagnostics via LED	Diagnostics per module
	Power supply load
Diagnostics via internal communication	Load switch-off
	Electronics/sensors overvoltage
	Undervoltage load
Module parameters	Configuration of voltage monitoring load supply PL
	Response in error state

Technical data – Electrical components				
Nominal operating voltage	[V AC]	110		
	[V DC]	24		
Nominal operating voltage for electrics/sensors	[V DC]	24		
Nominal operating voltage, load	[V DC]	24		
Permissible voltage fluctuations, electrics/sensors	[%]	± 25		
Permissible voltage fluctuations, load	[%]	± 10		
Intrinsic current consumption of electrics/sensors	[mA]	typ. 34 mA		
Intrinsic current consumption of load	[mA]	typ. 16 mA		
Max. power supply	[A]	2 x 4 A (external fuse required)		
Power failure buffering	[ms]	10		
Mains buffering of load	[ms]	3		
Fuse protection (short circuit)		Internal electronic fuse per channel		
Power supply				
Function		Incoming electronics/sensors and load		
Connection type		Plug		
Connection technology		M8x1, A-coded		
Number of pins/cores		4		
Voltage transmission				
Function		Outgoing electronics/sensors and load		
Connection type		Socket		
Connection technology		M8x1, A-coded		
Number of pins/cores		4		

Technical data – Mechanical components						
Product weight	[g]	712				
Dimensions W x L x H	[mm]	71 x 142 x 84				


Materials				
Cover	Die-cast aluminium			
Threaded sleeve	Nickel-plated brass			
Note on materials	RoHS-compliant			
LABS (PWIS) conformity	VDMA24364-B2-L			

Operating and environmental conditions			
Ambient temperature	[°C]	+5 +50	
Note on ambient temperature		Note ambient temperature derating to IEC 61131-2:2017	
Storage temperature	[°C]	-20 +60	
Relative humidity	[%]	5 95	
		Non-condensing	
Corrosion resistance class CRC <sup>1)</sup>		2	
CE marking (see declaration of conformity) <sup>2)</sup>		To EU EMC Directive	
		To EU RoHS Directive	
Certification		RCM	
Degree of protection		IP65	
Note on degree of protection		In mounted state	
		Seal unused connections	
Nominal operating altitude	[m]	≤ 2000 above sea level	
Maximum cable length	[m]	50, system communication	
Maximum setup altitude	[m]	3500	
Note on the maximum setup altitude		> 2000 m ASL (< 79.5 kPa)	
		Note ambient temperature derating to IEC 61131-2:2017	

More information www.festo.com/x/topic/crc
 More information www.festo.com/catalogue/... → Support/Downloads.

1			
Pin assignment	1	1	
	Pin	Allocation	Description
M8, D-coded, socket			
AP in (AP-COM)	1	TX-	AP bus, transmission signal positive
1	2	RX+	AP bus, receive signal positive
	3	TX+	AP bus, receive signal negative
4(0 0)2	4	RX-	AP bus, transmission signal negative
3			
AP out (AP-COM)	1	RX-	AP bus, transmission signal positive
1	2	TX+	AP bus, receive signal positive
	3	RX+	AP bus, receive signal negative
4(00)2	4	TX-	AP bus, transmission signal negative
3			
Power Out (voltage transmission)	1	24 V PS	Supply voltage for electronics and sensors
	2	0 V PL	Supply voltage for valves and outputs
4002	3	0 V PS	Supply voltage for electronics and sensors
3(0 0)1	4	24 V PL	Supply voltage for valves and outputs
			1
M8, D-coded, plug		Lauren	
Power In (power supply)	1	24 V PS	Supply voltage for electronics and sensors
	2	0 V PL	Supply voltage for valves and outputs
2 + + 4	3	0 V PS	Supply voltage for electronics and sensors
1 (+ +)2	4	24 V PL	Supply voltage for valves and outputs
1 3			






- 1] LED displays for module diagnostics (MD) and power load (PL)
- [2] AP in (AP-COM)
- [3] AP out (AP-COM)
- [4] Power in (power supply)
- [5] Power out (voltage transmission)

## **Dimensions**

Download CAD data → www.festo.com

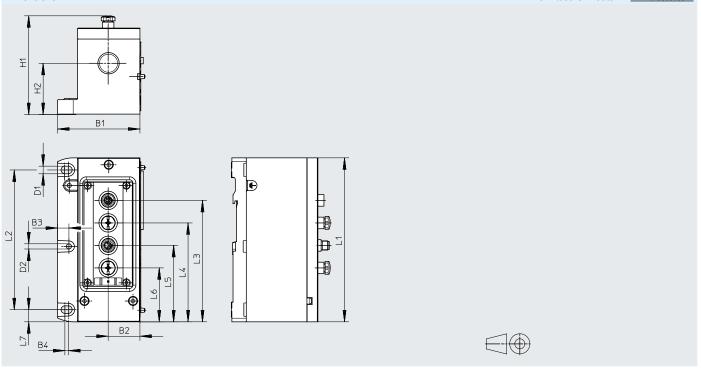

Туре	B1	B2	В3	B4	D1	D2	H1	H2
VABA-S6-1-AP	71.3	27.5	9.8	3	6.6	4.5	85.5	44.4
Туре	L1	L2	L3		_4	L5	L6	L7
VABA-S6-1-AP	142	121	105.2	! 8!	5.7	66.2	46.7	10.5

Ordering data – AP interf	g data – AP interface								
	Description	Part no.	Туре						
	AP interface for operation in an AP system	8152356	VABA-S6-1-AP						


- **[]** - Valve width to ISO 15407-2

- 18 mm
- 26 mm to ISO 5599-2
- 42 mm (ISO 1)
- 52 mm (ISO 2)

Voltage 24 V DC

- Flow rate<sup>1)</sup>
Width 18 mm: up to
550 (700) l/min
Width 26 mm: up to
1100 (1350) l/min
Width 42 mm: up to
1300 (1860) l/min
Width 52 mm



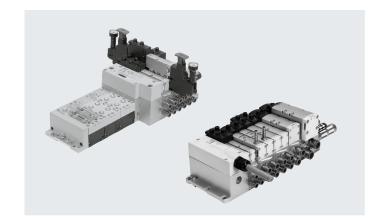

1) Flow rates in brackets apply to VTSA-F

General technical data			
Terminal type VTSA/VTSA-F	VTSA is the standard version, VTSA-F is the version with optimised flow rate		
Valve sizes	Width 18 mm, 26 mm, 42 mm, 52 mm		
Actuation type	Electrical		
Electrical control	With multi-pin plug: multi-pin		
	With fieldbus: integrated controller, fieldbus, Industrial Ethernet		
Type of control	Piloted		
Exhaust function, can be throttled	Via throttle plate		
Type of mounting	Wall mounting		
	On DIN rail to EN 60715		
Mounting position	Any		
Manual override	Detenting, non-detenting, concealed		
Suitable for vacuum	Yes		
Valve terminal design	Modular, valve sizes can be mixed		
Max. number of valve positions	32 <sup>1)</sup>		
Pneumatic connections – NPT thread			
Pneumatic connection	Via the manifold sub-base		
Supply port 1	Dependent on the end plate or supply plate used (and adapter plate when using ISO size 3 valves)		
Exhaust port 3/5 Dependent on the end plate or supply plate used (and adapter plate when using ISO size 3 valves)			
Working ports 2/4	Dependent on the connection type selected		
External pilot air supply port 14	Dependent on the end plate used (and adapter plate when using ISO size 3 valves)		
Pilot exhaust air port 12	Dependent on the end plate used (and adapter plate when using ISO size 3 valves)		

<sup>1)</sup> Dependent on the electrical interface and the manifold sub-bases used

 $<sup>| \</sup>label{eq:Note:This product conforms to ISO 1179-1 and ISO 228-1.}$ 

#### Valve terminal VTSA/VTSA-F, NPT

# Datasheet – Valve terminal

Valve function (with valve code)	Termi-	Width 18 mm			Width 26 mm				
	nal code	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F		
5/2-way double solenoid (B52)	J	750	550	700	1400	1100	1350		
5/2-way double solenoid with dominant signal (D52)	D	750	550	700	1400	1100	1350		
5/2-way single solenoid, pneumatic spring (M52A)	M	750	550	700	1400	1100	1350		
5/2-way single solenoid, mechanical spring (M52M)	0	750	550	700	1400	1100	1350		
5/3-way closed (P53C)	G	700	450	650	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted (P53E)	E	700 <sup>1)</sup> 330 <sup>2)</sup>	450 <sup>1)</sup> 330 <sup>2)</sup>	480 <sup>1)</sup> 330 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way pressurised (P53U)	В	700 <sup>1)</sup> 330 <sup>2)</sup>	450 <sup>1)</sup> 330 <sup>2)</sup>	480 <sup>1)</sup> 330 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	-	380 <sup>1)</sup> 310 <sup>2)</sup>	430 <sup>1)</sup> 360 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	-	380 <sup>1)</sup> 300 <sup>2)</sup>	460 <sup>1)</sup> 350 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	-	380 <sup>1)</sup> 350 <sup>2)</sup>	440 <sup>1)</sup> 400 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	-	370 <sup>1)</sup> 340 <sup>2)</sup>	430 <sup>1)</sup> 360 <sup>2)</sup>	-	850 <sup>1)</sup> 820 <sup>2)</sup>	950 <sup>1)</sup> 860 <sup>2)</sup>		
2x3/2-way single solenoid, closed (T32C)	K	600	400	550	1250	900	1150		
2x3/2-way single solenoid, open (T32U)	N	600	400	550	1250	900	1150		
2x3/2-way single solenoid, open/closed (T32H)	Н	600	400	550	1250	900	1150		
2x3/2-way single solenoid, closed (T32N)	Q	600	400	550	1250	900	1150		
2x3/2-way single solenoid, open (T32F)	Р	600	400	550	1250	900	1150		
2x3/2-way single solenoid, open/closed (T32W)	R	600	400	550	1250	900	1150		
2x2/2-way single solenoid, closed (T22C)	VC	700	500	650	1350	1000	1300		
2x2/2-way single solenoid, closed (T22CV)	VV	700	500	650	1350	1000	1300		


Switching position
 Mid-position


Standard nominal flow rate of valve/valve terminal [l/min	]								
Valve function (with valve code)	Termi-	Width 42 mm			Width 52 mm				
nal Valve Valve on valve code Valve on valve terminal VTSA terminal VTSA-F					Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F		
5/2-way double solenoid (B52)	J	2000	1300	1860	4000	2900	2900		
5/2-way double solenoid with dominant signal (D52)	D	2000	1300	1860	4000	2900	2900		
5/2-way single solenoid, pneumatic spring (M52A)	M	2000	1300	1860	4000	2900	2900		
5/2-way single solenoid, mechanical spring (M52M)	0	2000	1300	1860	4000	2900	2900		
5/3-way closed (P53C)	G	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>		
5/3-way exhausted (P53E)	E	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>		
5/3-way pressurised (P53U)	В	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>	2800 <sup>1)</sup> 1700 <sup>2)</sup>		
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	1700 <sup>1)</sup> 700 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>	1700 <sup>1)</sup> 700 <sup>2)</sup>	3000 <sup>1)</sup> 900 <sup>2)</sup>	2300 <sup>1)</sup> 900 <sup>2)</sup>	2300 <sup>1)</sup> 900 <sup>2)</sup>		
2x3/2-way single solenoid, closed (T32C)	К	1600	1200	1300	3000	2400	2400		
2x3/2-way single solenoid, open (T32U)	N	1600	1200	1300	3000	2400	2400		
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1200	1300	3000	2400	2400		
2x3/2-way single solenoid, closed (T32N)	Q	1600	1200	1300	3000	2400	2400		
2x3/2-way single solenoid, open (T32F)	Р	1600	1200	1300	3000	2400	2400		
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1200	1300	3000	2400	2400		
2x2/2-way single solenoid, closed (T22C)	VC	1600	1400	1500	4000	2800	2800		
2x2/2-way single solenoid, closed (T22CV)	W	1600	1400	1500	-	-	-		

Switching position
 Mid-position

#### Flow rate qn as a function of output pressure p2 with pressure regulator plates (P regulator plate) for port 1

6 bar 10 bar

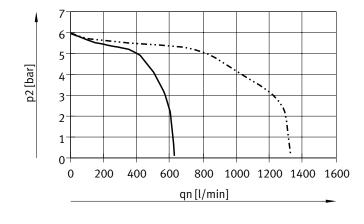


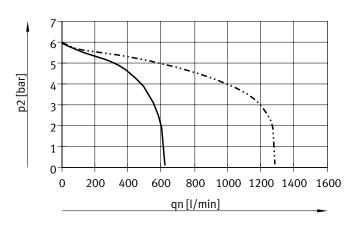


----- Width 18 mm
----- Width 26 mm

----- Width 18 mm
----- Width 26 mm

#### Input pressure 10 bar, regulated pressure set to 6 bar

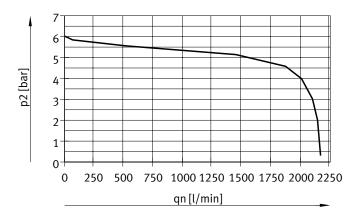

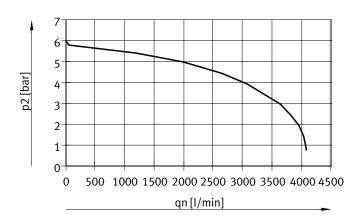



Width 42 mm (ISO 1)

Width 52 mm (ISO 2)

#### Flow rate qn as a function of output pressure p2 with pressure regulator plates (AB regulator plates) for port 2, 4 or ports 4/2

6 bar 10 bar

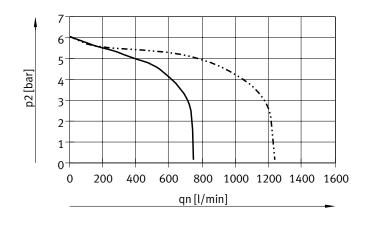


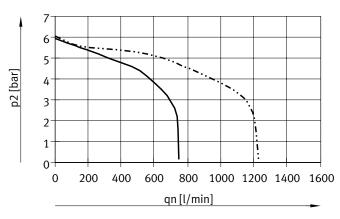


----- Width 18 mm

------ Width 18 mm

#### Input pressure 10 bar, regulated pressure set to 6 bar

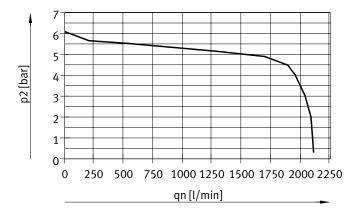

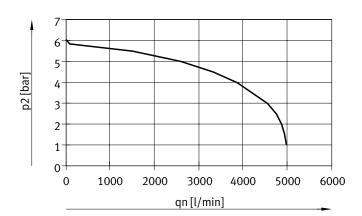



Width 42 mm (ISO 1)

Width 52 mm (ISO 2)

#### Flow rate qn as a function of output pressure p2 with pressure regulator plates (AB regulator plates, rev.) for ports 4/2, reversible

6 bar 10 bar

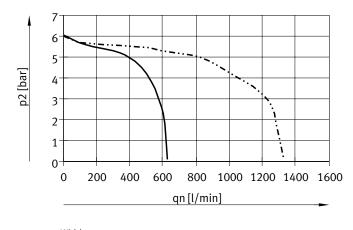


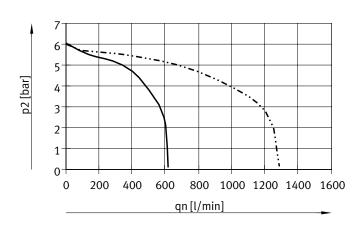


----- Width 18 mm

----- Width 18 mm

#### Input pressure 10 bar, regulated pressure set to 6 bar

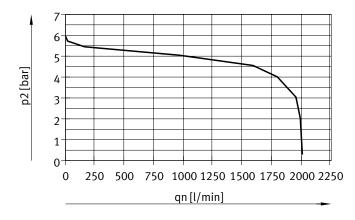


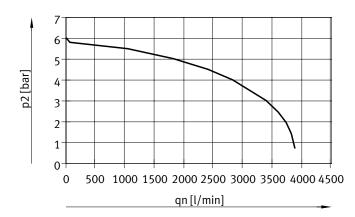


Width 42 mm (ISO 1)


Width 52 mm (ISO 2)

#### Flow rate qn as a function of flow control

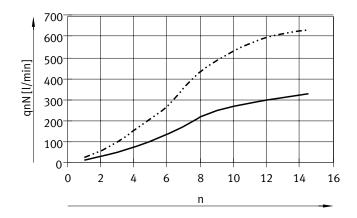

----- Width 18 mm

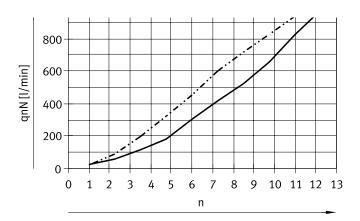

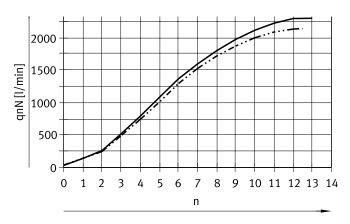

Width 42 mm (ISO 1)

Flow control screw from  $2 \rightarrow 3$ Flow control screw from  $4 \rightarrow 5$ 

n = revolutions of the adjusting screw


Width 52 mm (ISO 2)

Flow control screw from 2 → 3
 Flow control screw from 4 → 5

n = revolutions of the adjusting screw


#### Pilot pressure p12/14 as a function of operating pressure p1

For 3/2-way solenoid valves (T32, T22)

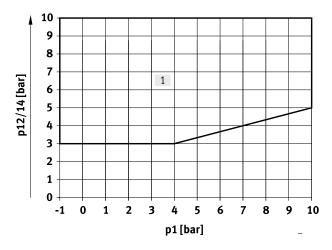

[1] Operating range for valves with external pilot air supply

For 5/2-way solenoid valves (M52, B52, D52, P53)

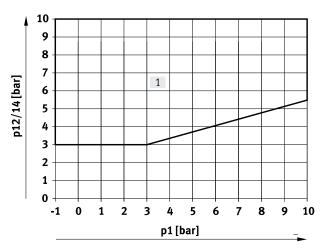

[1] Operating range for valves with external pilot air supply

Standard nominal flow rate with ve	rtical stacking [l/min]			
Widths	18 mm	26 mm	42 mm	52 mm
Throttle plate				
VABF-S4-2-F1B1-C	See characteristic curve	-	-	-
VABF-S4-1-F1B1-C	-	See characteristic curve	-	-
VABF-S2-1-F1B1-C	-	-	1100	-
VABF-S2-2-F1B1-C	-	-	-	See characteristic curve
Vertical supply plate				
VABF-S4-2-P1AG18	430	-	-	-
VABF-S4-1-P1AG14	-	900	-	-
VABF-S2-1-P1AG38	-	-	1300	-
VABF-S2-2-P1AG12	-	-	-	2800
Vertical pressure shut-off plate				
VABF-S4-2-L1D1-C	400	-	-	-
VABF-S4-2-L1D2-C 1)	320	-	-	-
VABF-S4-1-L1D1-C	-	800	-	-
VABF-S4-1-L1D2-C <sup>1)</sup>	-	620	-	-
VABF-S2-1-L1D1-C	-	-	1200	-
VABF-S2-2-L1D1-C	-	-	-	1950

<sup>1)</sup> Lockable with key

Operating and environmental cond	litions	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/		Lubricated operation possible (in which case lubricated operation will always be required)
pilot medium		
External	[bar]	-0.9 +10
	[MPa]	-0.09 +1
Internal	[bar]	310
	[MPa]	0.3 1
Pilot pressure	[bar]	310
	[MPa]	0.3 1
Noise level LpA	[dB(A)]	85
Ambient temperature	[°C]	-5 +50
Temperature of medium	[°C]	-5 +50
Storage temperature	[°C]	-20 +60
Relative humidity	[%]	090
Certification		BIA
		C-Tick
		c UL us – Recognized (OL)
CE marking (see		To EU EMC Directive 1)
declaration of conformity)		
KC marking		KCEMC
Corrosion resistance class CRC <sup>3)</sup>		0

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... 

Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

<sup>2)</sup> Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; the operating pressure here is 3 ... 10 bar

<sup>3)</sup> Corrosion resistance class CRC 0 to Festo standard FN 940070

No corrosion stress. Applies to small, visually unimportant standard parts such as threaded pins, circlips and clamping sleeves which are usually only available on the market in a phosphated or burnished version (and possibly oiled) as well as to ball bearings (for components < CRC 3) and plain bearings.

Electrical data – Individual electrical connection								
Load voltage supply for valves (U <sub>va</sub> )								
Operating voltage	[V DC]	24 ±10%						
Max. total current at 24 V DC	[A]	10						
Duty cycle		100%						
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)						

Electrical data – Multi-pin plug connection									
Load voltage supply for valves (U <sub>val</sub> )									
Operating voltage	[V DC]	24 ±10%							
Max. total current	[A]	6							
Current rating at 40 °C	[A]	1							
Surge resistance	[kV]	1.5							
Pollution degree		3							
Duty cycle		100%							
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)							

Electrical data – With CPX terminal									
Power supply for electronics (U <sub>EL/SEN</sub> )									
Operating voltage	[V DC]	24 ±10%							
Max. intrinsic current consumption	[mA]	20							
at 24 V DC									
Duty cycle		100%							
Load voltage supply for valves (U <sub>val</sub> )									
Operating voltage	[V DC]	24 ±10%							
Diagnostic message undervoltage U <sub>OFF</sub> ,	[V]	21.6 21.5							
load voltage outside the functional range									
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)							

Materials	
Manifold sub-base	Die-cast aluminium
Valve	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Supply plate	Die-cast aluminium
Right end plate	Die-cast aluminium
Pneumatic interface for CPX	Die-cast aluminium
Throttle plate	Die-cast aluminium
Pressure regulator plate	Die-cast aluminium, PA
Multi-pin manifold block	Die-cast aluminium
Cover for the pneumatic interface and multi-pin plug	PA
connection	
Note on materials	RoHS-compliant RoHS-compliant

#### Valve terminal VTSA/VTSA-F, NPT

## Datasheet – Valve terminal

Product weight				
Approx. weight	g]			
Width	18 mm	26 mm	42 mm	52 mm
Multi-pin node with Sub-D or terminal strip <sup>1)</sup>	550	·		
Multi-pin node with M12 individual connection	760			
Pneumatic interface CPX <sup>1)</sup>	1470			
Electrical interface for AS-Interface	300			
AS-Interface module	850			
Supply plate <sup>2)</sup>				
Exhaust plate with 3 and 5 common	617			
Exhaust air cover with 3 and 5 separate	597			
End plate, right <sup>3)</sup>				
With threaded connections	339			336
Selector switch	281			-
Manifold sub-base <sup>4)</sup>	447	634	340, 330 <sup>5)</sup>	610
Angled connection plate <sup>3)</sup>	170	230	176	359
Pressure regulator plate				
For port 1 (P)	350	402	640	1190
For port 4 or 2 (A or B)	367	448	640	1230
For ports 4 and 2 (A/B)	611	692	920	1990
Throttle plate	228	320	220	565
Vertical supply plate <sup>3)</sup>	140	191	340	605
Vertical pressure shut-off plate	209	273	600	1030
Vertical pressure shut-off plate (lockable with key)	231	290	-	-
Cover plate	34	73	68	146

<sup>1)</sup> With sheet metal seal, printed circuit board

<sup>2)</sup> With sheet metal seal and electrical link

With screws
 With sheet metal seal, electrical interlinking module, inscription label holder, 4 screws
 Manifold sub-base optimised for flow rate, HS

# **Dimensions** Download CAD data → www.festo.com Valve terminal with individual electrical connection ¥ 8 B2 10 11

- [1] Solenoid valve, width 18 mm
- Solenoid valve, width 26 mm
- Solenoid valve, width 42 mm

[4]

- Cover cap/manual override [5] Threaded connection 1/2 NPT
- Threaded connection 3/8 NPT
- [7] Threaded connection 1/4 NPT
- Threaded connection 1/8 NPT
- DIN rail [9]
- [10] DIN rail mounting
- [11] Mounting hole
- [12] Additional mounting bracket
- [13] Inscription label holder
- [14] Individual connection
- [15] End plate

- [16] Angled connection plate 43 mm, 3/8 NPT
- [17] Angled connection plate 54 mm, 1/4 NPT
- [18] M12 plug 5-pin (6-way or 10-way)
- [19] Solenoid valve, width 52 mm
- [20] Supply plate

- NO2 Number of manifold sub-bases 38 mm
- N01 Number of manifold sub-bases 54 mm
- N1 Number of manifold sub-bases 43 mm
- Number of manifold sub-bases N2
- Number of supply plates (only with end plate with pilot air selector)

Dim.	B1	B2	В	3 E	34 B5	Ве	6 B7	B8	B9	B1	0 B1	1 B1	2 B	13 B	14 B	15 E	316	B17	B18	B19	B20
[mm]	150.5	142	2 1	21 !	57 46	33	3 18	48	26	24	21	.3 1	2 29	2.6	3 1	9.6 1	9.5	19	10.5	6.6	4.5
Dim.	L2	L3	[	_4	L5	L6	L7	L8	L9		L10	L11	L12	L13	L14	L15	L	16	L17	L18	L19
[mm]	92.4	71.3	n2	x59	n01x54	54	n1x43	43	43.	5 n0	2x38	nx38	38	37.3	24	20.5	5 2	0	14.1	9.8	6.3
Dim.	L20	L21	L22	D1ø	D2Ø	H1	H2	Н3	H4	H5	Н6	H7	H8	H9	H10	H11	H12	H1	3   H1	4 H15	H16
[mm]	5.5	3	2	18.5	4.5	125	121.3	118.2	118	103	107.8	90.3	87	65	44	25.7	24.5	12	2 6	3.5	0.5

Width	L1
18 mm	71.3 + n02 x 38 + n x 38 + 37.3
26 mm	71.3 + n01 x 54 + n x 38 + 37.3
42 mm	71.3 + n1 x 43 + n x 38 + 37.3
52 mm	71.3 + n2 x 59 + n x 38 + 37.3
Combination of 18 mm, 26 mm, 42 mm and 52 mm	71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2x59 + n x 38 + 37.3


Note: This product conforms to ISO 1179-1 and ISO 228-1.

#### Download CAD data → www.festo.com **Dimensions** Valve terminal with multi-pin plug connection: 17 7 14 5 8 15 L22 12 H18 H12 5 9 10 B13 [1] Solenoid valve [9] DIN rail [17] Angled connection plate N02 Number of manifold sub-Width 18 mm [10] DIN rail mounting bases 38 mm 54 mm, 1/4 NPT Solenoid valve [11] Mounting hole [18] Proximity switch M12x1 N01 Number of manifold sub-Width 26 mm [12] Additional mounting bracket [19] Plug socket M12x1 bases 54 mm [3] Solenoid valve [13] Inscription label holder [20] Electrical connection to Number of manifold sub-N1 Width 42 mm [14] Multi-pin plug connection EN 175301-803, type C bases 43 mm Cover cap/manual override [15] End plate [21] Solenoid valve, width 52 mm Number of manifold sub-[4] [5] Threaded connection 1/2 NPT [16] Angled connection plate [22] Supply plate bases 59 mm Threaded connection 3/8 NPT 43 mm, 3/8 NPT [23] Soft-start valve Number of supply plates [6] n [7] Threaded connection 1/4 NPT (only with end plate with pilot Threaded connection 1/8 NPT [8] air selector) ВЗ В5 В6 В8 В9 B10 B12 B13 B16 B17 B18 B20 Dim. В7 B11 B14 B19 150.5 46 33 18 48 26 29.6 19.5 19 10.5 4.5 [mm] 142 121 57 27 12 23 6.6 Dim. L4 L5 L6 L7 L8 L9 L12 L13 L15 L16 L18 L19 L20 L21 L2 L3 L10 L11 L14 92.4 n01x54 n02x38 37.3 20.5 20 [mm] 71.3 n2x59 54 n1x43 43 43.5 nx38 38 36 9.8 6.3 5.5 3 Dim. L22 D1ø D2Ø Н1 H2 Н3 Н4 Н5 Н6 Н7 Н8 Н9 H10 H11 H12 H13 H14 H15 H16 H17 H18 118.2 143.9 106.3 107.8 103 90.3 90.3 [mm] 18.5 4.5 133.3 125 121.3 Width L1 18 mm 71.3 + n02 x 38 + n x 38 + 37.3 26 mm 71.3 + n01 x 54 + n x 38 + 37.3 42 mm 71.3 + n1 x 43 + n x 38 + 37.3 71.3 + n2 x 59 + n x 38 + 37.3 52 mm

Combination of 18 mm, 26 mm, 42 mm and 52 mm

71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 +n x 38+ 37.3

 $<sup>\</sup>mbox{\ensuremath{\mbox{\ensuremath}\ensuremat$ 

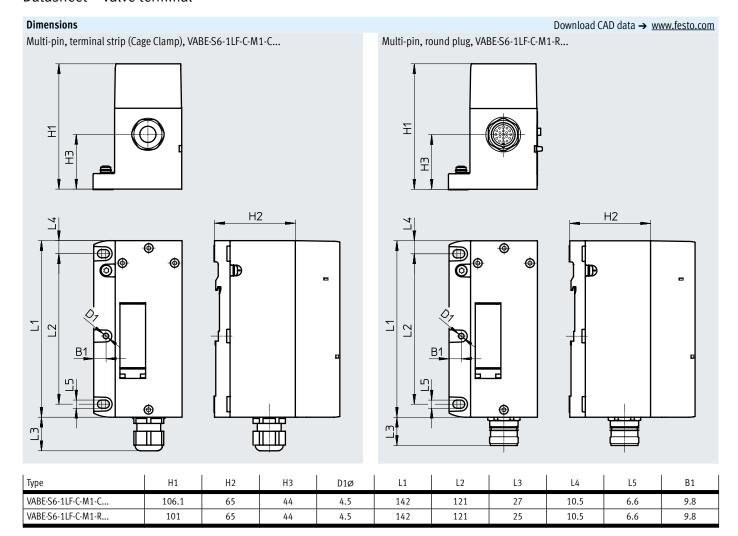

#### **Dimensions** Download CAD data → www.festo.com AP interface 4 17 3 2 16 18 1 L18 12 11 D2 13 [1] Solenoid valve 18 mm [6] Threaded connection G3/8, [14] End plate [9] DIN rail [2] Solenoid valve 26 mm 3/8 NPT [10] DIN rail mounting [15] Proximity switch M12x1 Solenoid valve 42 mm Threaded connection G1/4, [11] Mounting hole [16] Cover cap/manual override [3] [7] Solenoid valve 52 mm 1/4 NPT [12] Additional mounting bracket [17] Soft-start valve 43 mm [4] [5] Threaded connection G1/2, [8] Threaded connection G1/8, [13] Inscription labels [18] Supply plate 1/2 NPT 1/8 NPT Туре В1 B2 В3 В4 В6 В7 B10 B12 B13 B16 B18 B19 B20 D2 VTSA-ASI-. 150.5 142 121 57 33 18 28 12 29.6 19.5 10.5 6.6 4.5 4.5 Type Н1 Н2 НЗ Н4 Н5 Н6 Н7 Н8 Н9 H10 H12 H13 H15 VTSA-ASI-. 143.9 125 121.3 85.5 90.3 104.5 118.2 171 65 44.4 24.5 12 3.5 Type L1 Valve size 18 mm 02: 71.3 + n02 x 38 + n x 38 + 37.3 Valve size 26 mm 01: 71.3 + n01 x 54 + n x 38 + 37.3 Valve size 42 mm 71.3 + n1 x 43 + n x 38 + 37.3 Valve size 52 mm 71.3 + n2 x 59 + n x 38 + 37.3 Combination of 18 mm, 02 + 01 + 1 + 226 mm, 42 mm and 52 mm 71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 + n x 38 + 37.3

12

92.4

13

71.3

L4

n2<sup>1)</sup> x 59

15

n01<sup>2)</sup> x 54

L9

43.5

L7

n1<sup>3)</sup> x 43

L10

n02<sup>4)</sup> x 38

L11

n<sup>5)</sup> x 38

L12

L13

37.3

L18

9.8

L19

6.3

L21

L22

Туре

VTSA-ASI-..

Number of manifold sub-bases 59 mm

Number of manifold sub-bases 54 mm

<sup>3)</sup> Number of manifold sub-bases 43 mm

<sup>4)</sup> Number of manifold sub-bases 38 mm

<sup>5)</sup> Number of manifold sub-bases

#### **Dimensions** Download CAD data → www.festo.com Valve terminal with AS-Interface connection 19 3 2 17 Ŧ 5 5 5 6 7 8 14 Н9 83 **B**2 10 [1] Solenoid valve, width 18 mm [7] Threaded connection 1/4 NPT [16] Proximity switch M12x1 N02 Number of manifold sub-[2] Solenoid valve, width 26 mm Threaded connection 1/8 NPT [17] Cover cap/manual override bases 38 mm [3] Solenoid valve, width 42 mm [9] DIN rail [18] Soft-start valve, width 43 mm N01 Number of manifold sub-Solenoid valve, width 52 mm [10] DIN rail mounting [19] Supply plate bases 54 mm Threaded connection 1/2 NPT [11] Mounting hole N1Number of manifold sub-[12] Additional mounting bracket Threaded connection 3/8 NPT bases 43 mm [13] Inscription label N2Number of manifold sub-[14] End plate bases 59 mm [15] Plug M12 Number of supply plates n Dim. В7 B10 B12 B13 B16 B18 B19 B20 В6 [mm] 150.5 142 121 57 33 18 28 12 29.6 23 19.5 10.5 6.6 4.5 Dim. L2 L3 L4 L5 L9 L10 L11 L12 L13 L16 L18 L19 L20 L21 92.4 n2x59 n01x54 n1x43 43.5 n02x38 nx38 43 37.3 9.8 6.3 [mm] 71.3 20 5.5 3 Dim. L22 D2Ø Н1 H2 НЗ Н4 Н5 Н6 Н7 Н8 Н9 H10 H12 H13 H14 H15 [mm] 4.5 143.9 125 118.2 121.3 118.6 171 90.3 104.5 65 44 24.5 12 3.5

Width	L1
18 mm	71.3 + n02 x 38 + n x 38 + 37.3
26 mm	71.3 + n01 x 54 + n x 38 + 37.3
42 mm	71.3 + n1 x 43 + n x 38 + 37.3
52 mm	71.3 + n2 x 59 + n x 38 + 37.3
Combination of 18 mm, 26 mm, 42 mm and 52 mm	71.3 + n02 x 38 + n01 x 54 + n1 x 43 + n2 x 59 + n x 38 + 37.3

# **Dimensions** Download CAD data → www.festo.com Valve terminal with fieldbus interface 14 5 5 5 18 力 5 8 16 22

- [1] Solenoid valve, width 18 mm
- Solenoid valve, width 26 mm [2]
- Solenoid valve, width 42 mm [3]
- [4] Cover cap/manual override
- Threaded connection 1/2 NPT [5]
- Threaded connection 3/8 NPT [6]
- Threaded connection 1/4 NPT [7]
- [8] Threaded connection 1/8 NPT
- [9] DIN rail
- [10] DIN rail mounting
- [11] Mounting hole
- [12] Additional mounting bracket

- [13] Inscription label holder
- [14] Pneumatic interface CPX
- [15] End plate
- [16] CPX module/bus node
- [17] Angled connection plate 43 mm, 3/8 NPT
- [18] Angled connection plate 54 mm, 1/4 NPT
- [19] Proximity switch M12x1
- [20] Plug socket M12x1
- [21] Electrical connection to EN 175301-803, type C


- [22] Hole for additional mounting, diameter 6.4 2x
- [23] Solenoid valve, width 52 mm
- [24] Supply plate
- [25] Soft-start valve
- Number of manifold subbases 38 mm
- Number of manifold sub-N01 bases 54 mm
- Number of manifold sub-Ν1 bases 43 mm
- Number of manifold sub-N2 bases 59 mm
- Number of supply plates n (only with end plate with pilot air selector)
- Number of CPX modules


Dim.	B1	B2	В3	B4	B5	В6	В7	В8	В9	B10	B11	B12	B13	B14	B16	B17	B18	B19	B20	B21	B22	B23	B24
[mm]	107.3	142	121	57	46	33	18	48	26	78	66	12	29.6	23	19.5	19	10.5	6.6	4.5	65	18.9	7.5	4.4
Dim.	L2	L3	L4	[	.5	L6	L7	L	8	L9	L	10	L11	L12	L13	L14	L15	5   L1	17   L	18	L19	L21	L22
[mm]	92.4	50	n2x5	9 n01	lx54	54	n1x43	4	3	mx50.1	n02	x38	nx38	38	37.3	1	20.	5 2	2 2	22	6.3	3	2
Dim.	L23	L24	L25	H1	H2	Н3	H4		Н5	Н6	H7	Н8	Н9	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19
[mm]	30.4	23.7	1.5	143.9	133.3	125	121	.3 1	18.2	103	106.8	87	90.3	92.9	55.1	65	25.8	25.7	24.5	12	6	3.5	10.8


Width	L1
18 mm	30.4 + m x 50.1 + 50 + n02 x 38 + n x 38 + 37.3
26 mm	30.4 + m x 50.1 + 50 + n01 x 54 + n x 38 + 37.3
42 mm	30.4 + m x 50.1 + 50 + n1 x 43 + n x 38 + 37.3
52 mm	30.4 + m x 50.1 + 50 + n2 x 59 + n x 38 + 37.3
Combination of 18 mm, 26 mm, 42 mm and 52 mm	30.4 + m x 50.1 + 50 + n02 x 38 + n01 x 54 + n1 x 43 + n2x59 + n x 38 + 37.3


Note: This product conforms to ISO 1179-1 and ISO 228-1.


#### **Dimensions** Download CAD data → www.festo.com Vertical stacking components, width 18 mm 1 3 [1] Solenoid valve with two sole-L4 noid coils, width 18 mm Throttle plate L6 5 [4] Vertical pressure shut-off plate lockable (code ZT), optionally 6 lockable with key (code ZS) 7 [5] Vertical supply plate Manifold sub-base [6] \_L5 [7] Angled connection plate L5 Dim. L1 L2 L3 L4 L3 L4 L6 Н1 Н3 Н4 Н5 Н6 Н7 (Code ZT) (Code ZT) (Code ZS) (Code ZS) 130 [mm] 133.8 203.7 222.3 198.3 46 142 224 65 64 35 19 3.5

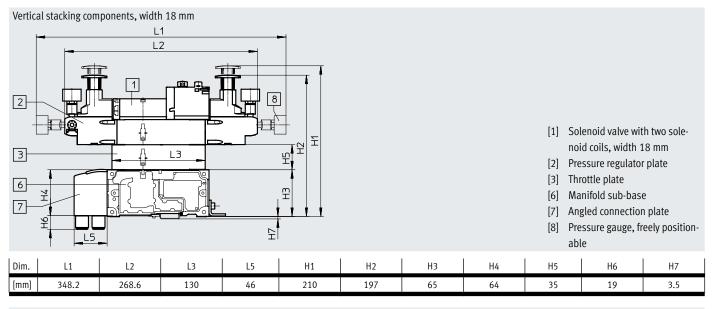

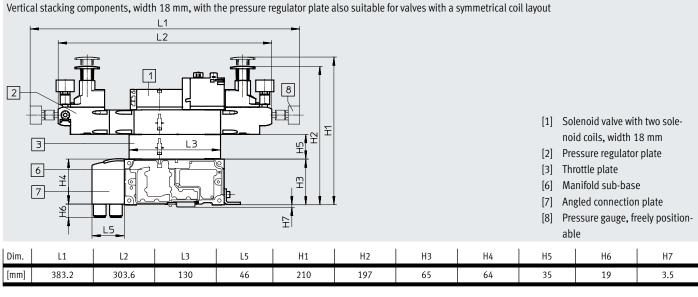

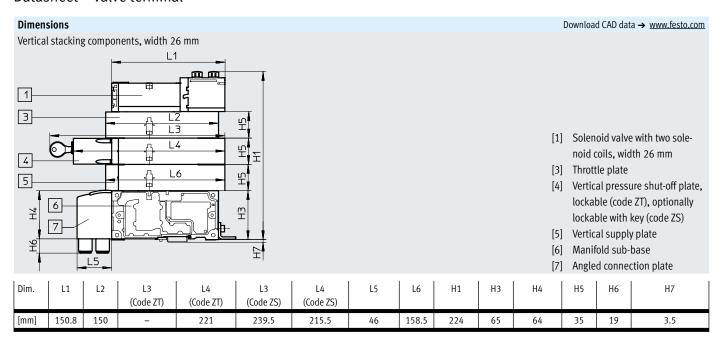


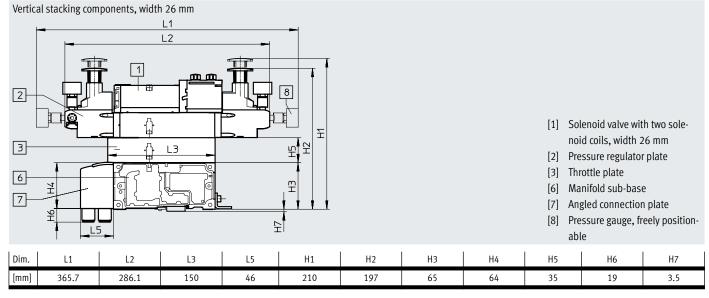

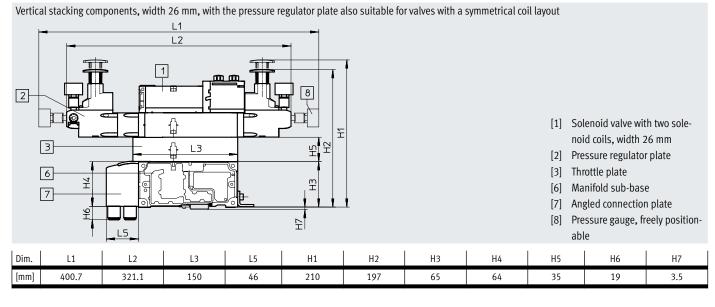

#### **Dimensions**

Vertical stacking components, width 42 mm

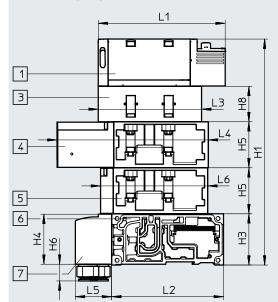


Download CAD data → www.festo.com

- [1] Solenoid valve
- [3] Throttle plate
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base
- [7] Angled connection plate

Dim.	L1	L2	L3	L4	L5	L6	H1	Н3	H4	H5	H6	H7	H8
[mm]	137.8	142	105.3	173.8	46	117.6	236	65	64	45.3	25.7	3.5	28

Vertical stacking components, width 42 mm

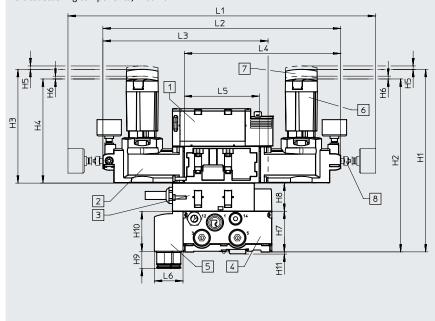

- [1] Solenoid valve
- [2] Pressure regulator plate
- [3] Throttle plate
- [4] Manifold sub-base
- [5] Angled connection plate
- [6] Short rotary knob, lockable (standard)
- [7] Long rotary knob, lockable
- [8] Pressure gauge, freely positionable

Dim.	L1	L2	L3	L4	L5	L6	H1	H2	Н3	H4	H5	H6	H7	H8	H9	H10	H11
[mm]	410.3	311.6	216.1	207.1	102.6	46	220	205	127	112	3	4.2	65	28	25.7	64	3.5



#### Note

Pressure regulator plates for valves with a symmetrical coil layout and widths of 42 mm and 52 mm can only be ordered via the pressure regulator configurator VABF-S2.


→ Internet: vabf-s2

The following can be selected using the pressure regulator configurator VABF-S2:

- Rotary knob, short version with locking element (standard)
- Rotary knob, long version with locking element
- Rotary knob with integrated lock

#### Dimensions


Vertical stacking components, width 52 mm

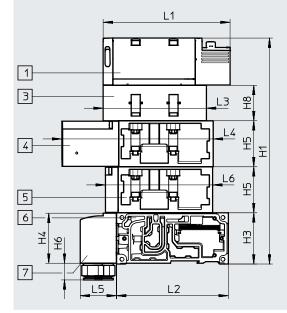

Download CAD data → www.festo.com

- [1] Solenoid valve
- [3] Throttle plate
- [4] Vertical pressure shut-off plate
- [5] Vertical supply plate
- [6] Manifold sub-base
- [7] Angled connection plate

Dim.	L1	L2	L3	L4	L5	L6	H1	H3	H4	H5	Н6	Н8
[mm]	160.7	142	131	191.2	46	136	287.4	65	63.5	58.7	21.2	45

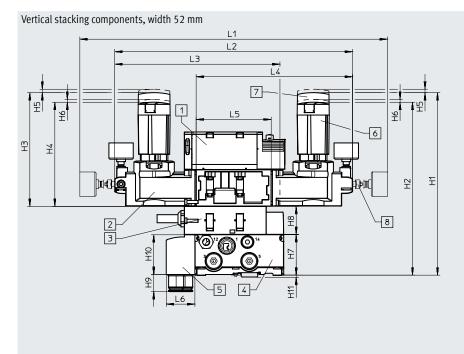

- [1] Solenoid valve
- [2] Pressure regulator plate
- [3] Throttle plate
- [4] Manifold sub-base
- [5] Angled connection plate
- [6] Short rotary knob, lockable (standard)
- [7] Long rotary knob, lockable
- [8] Pressure gauge, freely positionable

Dim.	L1	L2	L3	L4	L5	L6	H1	H2	Н3	H4	H5	H6	H7	H8	H9	H10	H11
[mm]	492	380.4	264.2	250.2	120	45.8	291	276	181	166	5.5	4.5	65	45	27.4	63.5	3.5



#### Note


Pressure regulator plates for valves with a symmetrical coil layout and widths of 42 mm and 52 mm can only be ordered via the pressure regulator configurator VABF-S2.


→ Internet: vabf-s2

The following can be selected using the pressure regulator configurator VABF-S2:

- Rotary knob, short version with locking element (standard)
- Rotary knob, long version with locking element
- Rotary knob with integrated lock

#### **Dimensions** Download CAD data → www.festo.com Supply plate with silencer 2 1 [1] Supply plate Exhaust port cover Silencer U-1/2-B-NPT Threaded connection 1/2 NPT Dim. 142 107.5 75 31.5 38 [mm]

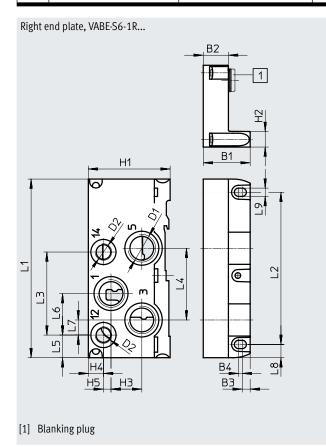

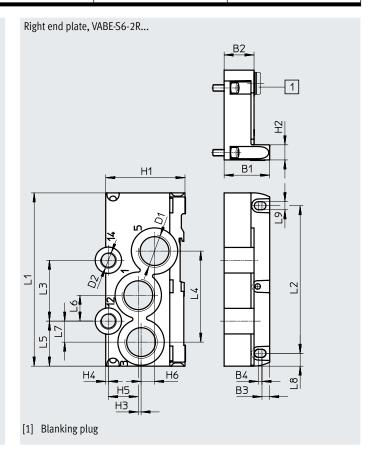

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	D1	D2	H1	H2	Н3	H4	H5	Н6	B1	B2	В3	В4	With <sup>1)</sup>
VABE-S6-1R-G12	142	121	66	E 7	18	22	12	10.5	6.6	1/2 NPT	1/4 NPT	65	12.5	24.5	12	6		37.3	22	6.2	2	[1]
VABE-S6-1RZ-G12	142	121	00	5/	10	))	12	10.5	6.6	1/2 NF1	1/4 NF1	65	12.5	24.5	12	0	_	37.3	22	6.3	)	-
VABE-S6-2R-G34	142	121	49.9	74.6	36.9	21.2	17.2	10.5	6.6	3/4 NPT	1/4 NPT	65	12 [	23	2.2	24.5	11	37.3	24.5	6.3	0	[1]
VABE-S6-2RZ-G34	142	121	49.9	74.6	30.9	21.2	17.2	10.5	6.6	3/4 NF1	1/4 NF1	65	12.5	2.3	2.2	24.5	11	37.3	24.5	0.5	)	-


With blanking plug = internal pilot air supply, – without blanking plug = external pilot air supply Special feature: There is no port 14 for VABE-S6-1R-G12 (code V).

 $<sup>\</sup>mbox{\ensuremath{\psi}}$  · Note: This product conforms to ISO 1179-1 and ISO 228-1.

#### Dimensions

Download CAD data → www.festo.com

Right end plate with pilot air selector, VABE-S6-1RZ-N-B1

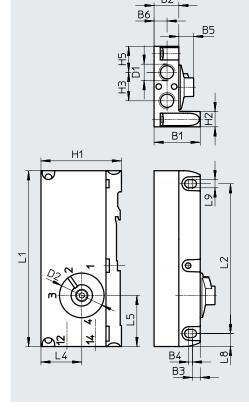

Туре		L1	L2	L5	L8	L9	D1	D2	H1	H2	Н3	H4	H5	B1	B2	В3	B4	B5	В6
VABE-S6-1	RZ-N-B1	142	121	41.3	10.5	6.6	1/4 NPT	37	65.4	12.5	23	33	21	37.3	20	6.3	3	12	10.5


Note: This product conforms to ISO 1179-1 and ISO 228-1.

#### Datasheet - Solenoid valves VSVA

- **[]** - Valve width to ISO 15407-2


- 18 mm
- 26 mm to ISO 5599-2
- 42 mm (ISO 1)
- 52 mm (ISO 2)

- **\** - Voltage 24 V DC



550 (700) l/min Width 26 mm: up to 1100 (1350) l/min Width 42 mm: up to 1300 (1860) l/min Width 52 mm

up to 2900 l/min

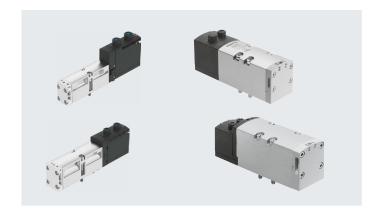

1) Flow rates in brackets apply to VTSA-F

General technical data for solen	oid valves	
Design		Piston spool valve
Sealing principle		Soft
Overlap		Positive overlap (excluding types P53AD, P53BD)
		Negative overlap (types P53AD, P53BD)
Reset method		Mechanical or pneumatic, depending on the type used
Actuation type		Electrical
Electrical connection		Plug to ISO 15407-2, 2-pin (single solenoid types) or 4-pin (double solenoid and 5/3-way types)
Type of control		Piloted
Degree of protection to EN 60529	)	IP65, NEMA 4 (for all types of signal transmission when mounted)
Exhaust function, can be throttle	d	Via individual sub-base, via throttle plate (not with valve type T22)
Type of mounting		On manifold sub-base, on individual sub-base
Mounting position		Any
Manual override		Detenting, non-detenting, concealed
Signal status indication		LED (except types with signal status display sensor, and part nos.: 560727 and 560728)
Sensor signal status indication		Yellow LED
Duty cycle	[%]	100
Pollution degree		3
Surge resistance	[kV]	2.5
Nominal operating voltage	[V DC]	24 (dependent on valve type)
Permissible voltage fluctuations	[%]	±10
Pneumatic connections		
Supply	1	Via the manifold sub-base of the valve terminal or via individual sub-base
Exhausting	3/5	
Working ports	2/4	
Pilot air supply	1 2/14	
Pilot exhaust air	8 2/84	Either ducted or unducted

#### Datasheet - Solenoid valves

Pneumatic characteri	istic data									
Terminal code	VC	W	N	K	Н	P	Q	R	М	0
Valve code	T22C	T22CV	T32U	T32C	T32H	T32F	T32N	T32W	M52-A	M52-M
Flow direction										
Any	_	•	-	-	-	-	-	-	•	•
Reversible only	_	-	-	-	-	•	•	•	-	_
Not reversible	•	-		•	•	-	-	-	-	_
Reset method										
Pneumatic spring	•			•	•	•		•	•	_
Mechanical spring	_	_	_	_	_	_	_	_	_	•

Pneumatic characteris	stic data									
Terminal code	J	D	В	G	E	SA	SB	SD	SE	VG
Valve code	B52	D52	P53U	P53C	P53E	P53ED	P53AD	P53BD	P53EP	P53F
Flow direction										
Any	-	•	•		•	-		-	-	
Reversible only	-	-	-	-	-	-	-	-	-	-
Not reversible	-	_	_	_	_	•	_	•		_
Reset method										
Pneumatic spring	-	_	-	-	-	-	-	-	-	-
Mechanical spring	-	_	•	•	-	•	•	-		•

#### Flow direction of solenoid valves

Solenoid valves only with reversible flow direction

- These valves must only be operated on pressure zones with reversible supply (3 and 5 with supply pressure 1 as exhaust air) or on a reversible pressure regulator. If necessary, create separate pressure zones with duct separation.
- Reversible 3/2-way solenoid valves do not permit the special function "ducted pilot exhaust air"

96

- Ports 12 and 14 on the end plate variants must be supplied with the same pressure.
- Right end plate with pilot air selector: can be realised via position 1 or 2
- Right end plate with threaded connections: 12 and 14 must be supplied with the same pressure level

Solenoid valves with any flow direction

- Valves with any flow direction such as the 5/2-way solenoid valve, code M, for example, are suitable for vacuum operation (standard valves such as the 2x 2/2-way solenoid valve with code VC, for example, must not be used for vacuum operation).
- An exception is the 2x 2/2-way solenoid valve with code VV (T22CV), which only allows vacuum operation at ports 3 and 5. The solenoid valve with code VV (T22CV) cannot be combined with other valve functions; a separate pressure zone is required.

## Datasheet – Solenoid valves

Operating and environmental cond	itions		
Operating medium			Compressed air to ISO 8573-1:2010 [7:4:4]
Pilot medium			Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on operating/pilot medium			Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure, pilot air sup-		[bar]	-0.9 +10 (valves with any flow direction and reversible valves)
ply <sup>2)</sup>			3 10 (non-reversible valves)
		[MPa]	-0.09 +1 (valves with any flow direction and reversible valves)
			0.3 1 (non-reversible valves)
Pilot pressure		[bar]	310
		[MPa]	0.3 1
Pilot air supply			External
			Internal via valve terminal
Ambient temperature		[°C]	-5 +50
Relative humidity		[%]	090
Certification			BIA (for characteristic SP and/or SN only)
	Direct voltage 24 V DC		C-Tick (only size 52 mm and solenoid valves with sensor (position sensing))
			c UL us – Recognized (OL)
CE marking (see	Direct voltage 24 V DC		To EU EMC Directive 1)
declaration of conformity)			

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... -> Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

<sup>2)</sup> Solenoid valves with code VC (2/2-way type ... T22C), N (3/2-way type ... T32U), K (3/2-way type ... T32C), H (3/2-way type ... T32H) must not be operated with vacuum; the operating pressure here is 3 ... 10 bar

#### Datasheet - Solenoid valve width 18 mm

- **[]** - Valve width to ISO 15407-2 18 mm

Flow rate
Valve width 18 mm:
VTSA up to 550 l/min
VTSA-F up to 700 l/min





Safety characteristics – Valve, width 18 mm						
Conforms to standard		EN 13849-1/2				
CE marking (see declaration of	Direct voltage	To EU EMC Directive <sup>1)</sup> (solenoid valves with sensor only)				
conformity)	24 V DC					
Shock resistance		Shock test with severity level 2, to EN 60068-2-27				
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6				

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... 

Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Valve function (with valve code)	Terminal	Test pulses	
	code	Max. positive test pulse with logic 0 [µs]	Max. negative test pulse with logic 1 [μs]
5/2-way double solenoid (B52)	J	1500	800
5/2-way double solenoid with dominant signal (D52)	D	1700	1200
5/2-way single solenoid (M52A)	М	1500	800
5/2-way single solenoid (M52M)	0	1500	800
5/3-way closed (P53C)	G	1500	800
5/3-way exhausted (P53E)	E	1500	800
5/3-way pressurised (P53U)	В	1500	800
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1500	800
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1500	800
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1500	800
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1500	800
2x3/2-way single solenoid, closed (T32C)	K	1700	1200
2x3/2-way single solenoid, open (T32U)	N	1700	1200
2x3/2-way single solenoid, open/closed (T32H)	Н	1700	1200
2x3/2-way single solenoid, closed (T32N)	Q	1700	1200
2x3/2-way single solenoid, open (T32F)	Р	1700	1200
2x3/2-way single solenoid, open/closed (T32W)	R	1700	1200
2x2/2-way single solenoid, closed (T22C)	VC	1700	1200
2x2/2-way single solenoid, closed (T22CV)	VV	1700	1200

## Datasheet – Solenoid valve width 18 mm

Valve function (with valve code)	Terminal	Flow direction	on		Reset method	Weight	
	code	any	reversible only	not reversible	pneumatic spring	mechanical spring	[g]
5/2-way double solenoid (B52)	J	•	_	_	_	_	172
5/2-way double solenoid with dominant signal (D52)	D	•	_	-	_	_	172
5/2-way single solenoid (M52A)	M	•	_	-	•	-	163
5/2-way single solenoid (M52M)	0	•	-	-	_	•	163
5/3-way closed <sup>1)</sup> (P53C)	G	•	-	-	-	•	191
5/3-way exhausted <sup>1)</sup> (P53E)	E	•	-	-	_	•	191
5/3-way pressurised <sup>1)</sup> (P53U)	В	•	_	_	_	•	191
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	_	-		_	•	170
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	_	-	•	_	•	170
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	•	-	-	-	•	172
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	-	-	•	-	•	172
2x3/2-way single solenoid, closed (T32C)	K	-	_	•	•	_	190
2x3/2-way single solenoid, open (T32U)	N	-	-	•	•	-	190
2x3/2-way single solenoid, open/closed (T32H)	Н	-	-	•	•	-	190
2x3/2-way single solenoid, closed (T32N)	Q	-	•	-	•	_	190
2x3/2-way single solenoid, open (T32F)	Р	-	•	_	•	_	190
2x3/2-way single solenoid, open/closed (T32W)	R	-	•	_	•	_	190
2x2/2-way single solenoid, closed (T22C)	VC	-	_	•	•	_	190
2x2/2-way single solenoid, closed (T22CV)	VV	•	_	_	•	_	190

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

#### Datasheet - Solenoid valve width 18 mm

Valve function (with valve code)	Terminal	Flow							
	code	Valve	Valve on valve terminal	Valve on valve terminal VT-	Valve on individual sub-				
			VTSA	SA-F	base				
5/2-way double solenoid (B52)	J	750	550	700	600				
5/2-way double solenoid with dominant signal (D52)	D	750	550	700	600				
5/2-way single solenoid (M52A)	M	750	550	700	600				
5/2-way single solenoid (M52M)	0	750	550	700	600				
5/3-way closed (P53C)	G	700	450	650	550				
5/3-way exhausted (P53E)	E	700 <sup>1)</sup>	450 <sup>1)</sup>	4801)	500 <sup>1)</sup>				
		330 <sup>2)</sup>	330 <sup>2)</sup>	330 <sup>2)</sup>	330 <sup>2)</sup>				
5/3-way pressurised (P53U)	В	700 <sup>1)</sup>	450 <sup>1)</sup>	480 <sup>1)</sup>	500 <sup>1)</sup>				
		330 <sup>2)</sup>	330 <sup>2)</sup>	330 <sup>2)</sup>	330 <sup>2)</sup>				
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	_	380 <sup>1)</sup>	430 <sup>1)</sup>	390 <sup>1)</sup>				
			310 <sup>2)</sup>	360 <sup>2)</sup>	310 <sup>2)</sup>				
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	-	380 <sup>1)</sup>	4601)	390 <sup>1)</sup>				
			300 <sup>2)</sup>	350 <sup>2)</sup>	320 <sup>2)</sup>				
5/3-way, port 2 pressurised, 4 exhausted, switching	SB	_	380 <sup>1)</sup>	4401)	380 <sup>1)</sup>				
position 14 detenting (P53AD)			350 <sup>2)</sup>	4002)	360 <sup>2)</sup>				
5/3-way, port 4 pressurised, 2 exhausted, switching	SD	_	370 <sup>1)</sup>	430 <sup>1)</sup>	400 <sup>1)</sup>				
position 14 detenting (P53BD)			340 <sup>2)</sup>	360 <sup>2)</sup>	350 <sup>2)</sup>				
			360 <sup>3)</sup>	450 <sup>3)</sup>	390 <sup>3)</sup>				
			360 <sup>4)</sup>	450 <sup>4)</sup>	380 <sup>4)</sup>				
2x3/2-way single solenoid, closed (T32C)	K	600	400	550	500				
2x3/2-way single solenoid, open (T32U)	N	600	400	550	500				
2x3/2-way single solenoid, open/closed (T32H)	Н	600	400	550	500				
2x3/2-way single solenoid, closed (T32N)	Q	600	400	550	500				
2x3/2-way single solenoid, open (T32F)	Р	600	400	550	500				
2x3/2-way single solenoid, open/closed (T32W)	R	600	400	550	500				
2x2/2-way single solenoid, closed (T22C)	VC	700	500	650	500				
2x2/2-way single solenoid, closed (T22CV)	W	700	500	650	500				

<sup>1)</sup> Switching position

#### Note

When using the solenoid valves VSVA-B-P53AD-...- or VSVA-B-P53BD-...- (terminal code SB or SD) for unobstructed exhausting (1 $\rightarrow$ 2 or  $1\rightarrow4)$  in the detenting or mid-position, the flow rate can reduce or drop to 0 l/min if the operating pressure is greater than 6 bar. This does not happen if a tube measuring at least 15 cm in length is used at port 2/4.

<sup>2)</sup> Mid-position

<sup>3)</sup> Switching position 4 → 5
4) Mid-position 2 → 3

# Datasheet – Solenoid valve width 18 mm

Valve switching times in [ms]				
Valve function (with valve code)	Terminal	On	Off	Changeover
	code			
5/2-way double solenoid (B52)	J	-	-	11
5/2-way double solenoid with dominant signal (D52)	D	-	-	13
5/2-way single solenoid (M52A)	М	22	28	-
5/2-way single solenoid (M52M)	0	12	38	-
5/3-way closed (P53C)	G	15	44	-
5/3-way exhausted (P53E)	E	15	44	-
5/3-way pressurised (P53U)	В	15	44	-
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	13 for control side 12 10 for control side 14	37 for control side 12	(24)
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	10 for control side 12 13 for control side 14	30 for control side 12	(23)
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	12 for control side 12 9 for control side 14	28 for control side 12	-
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	12 for control side 12 9 for control side 14	28 for control side 12	-
2x3/2-way single solenoid, closed (T32C)	K	12	30	-
2x3/2-way single solenoid, open (T32U)	N	12	30	-
2x3/2-way single solenoid, open/closed (T32H)	Н	12	30	-
2x3/2-way single solenoid, closed (T32N)	Q	25	12	-
2x3/2-way single solenoid, open (T32F)	Р	25	12	-
2x3/2-way single solenoid, open/closed (T32W)	R	25	12	-
2x2/2-way single solenoid, closed (T22C)	VC	12	30	-
2x2/2-way single solenoid, closed (T22CV)	VV	12	30	_

Characteristic coil data, width 18 mm		
Valve function (with valve code)	Terminal code	Characteristic coil data at 24 V DC in [W]
5/2-way double solenoid (B52)	J	1.6
5/2-way double solenoid with dominant signal (D52)	D	1.3
5/2-way single solenoid (M52A)	M	1.6
5/2-way single solenoid (M52M)	0	1.6
5/3-way closed (P53C)	G	1.6
5/3-way exhausted (P53E)	E	1.6
5/3-way pressurised (P53U)	В	1.6
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1.6
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1.6
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	1.6
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1.6
2x3/2-way single solenoid, closed (T32C)	K	1.3
2x3/2-way single solenoid, open (T32U)	N	1.3
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3
2x3/2-way single solenoid, closed (T32N)	Q	1.3
2x3/2-way single solenoid, open (T32F)	Р	1.3
2x3/2-way single solenoid, open/closed (T32W)	R	1.3
2x2/2-way single solenoid, closed (T22C)	VC	1.3
2x2/2-way single solenoid, closed (T22CV)	VV	1.3

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

Ordering data – Solenoid		A, MO non-detenting/detenting (D)		1		1
	Terminal code	Valve function	Valve code	Width	Part no.	Туре
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	561155	VSVA-B-T22C-AZD-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	561159	VSVA-B-T22CV-AZD-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	539178	VSVA-B-T32U-AZD-A2-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	539176	VSVA-B-T32C-AZD-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	539180	VSVA-B-T32H-AZD-A2-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	539179	VSVA-B-T32F-AZD-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	18 mm	539177	VSVA-B-T32N-AZD-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	539181	VSVA-B-T32W-AZD-A2-1T1L
	М	5/2-way valve, single solenoid, pneumatic spring return	M52-A	18 mm	539184	VSVA-B-M52-AZD-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	539185	VSVA-B-M52-MZD-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	539182	VSVA-B-B52-ZD-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	539183	VSVA-B-D52-ZD-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	539186	VSVA-B-P53U-ZD-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	539188	VSVA-B-P53C-ZD-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	539187	VSVA-B-P53E-ZD-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8031814	VSVA-B-P53ED-ZD-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8031818	VSVA-B-P53EP-ZD-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	18 mm	8031815	VSVA-B-P53AD-ZD-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	18 mm	8031817	VSVA-B-P53BD-ZD-A2-1T1L

•	Terminal	/A with cover cap for MO non-detenting/heavy duty, detenting via a Valve function	Valve	Width	Part no.	Туре
	code	valve function	code	Width	rait iiu.	Туре
enoid valves	code		couc			
Section valves	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	8033457	VSVA-B-T22C-AZTR-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	8033458	VSVA-B-T22CV-AZTR-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	8033446	VSVA-B-T32U-AZTR-A2-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	8033444	VSVA-B-T32C-AZTR-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	8033448	VSVA-B-T32H-AZTR-A2-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	8033447	VSVA-B-T32F-AZTR-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	18 mm	8033445	VSVA-B-T32N-AZTR-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	8033449	VSVA-B-T32W-AZTR-A2-1T1L
	М	5/2-way valve, single solenoid, Pneumatic spring return	M52-A	18 mm	8033452	VSVA-B-M52-AZTR-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	8033453	VSVA-B-M52-MZTR-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	8033450	VSVA-B-B52-ZTR-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	8033451	VSVA-B-D52-ZTR-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	8033454	VSVA-B-P53U-ZTR-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	8033456	VSVA-B-P53C-ZTR-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	8033455	VSVA-B-P53E-ZTR-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8039181	VSVA-B-P53ED-ZTR-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8039190	VSVA-B-P53EP-ZTR-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	18 mm	8039184	VSVA-B-P53AD-ZTR-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	18 mm	8040110	VSVA-B-P53BD-ZTR-A2-1T1L

Ordering data – Soleno		SVA with cover cap for MO, non-detenting (H)	1	1	I	1
		l Valve function	Valve	Width	Part no.	Туре
	code		code			
Solenoid valves	Luc	To 0/0 1 1 1 1 1	Tank	Tao		LYGYA B TOOK ATH AS ATH
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	8033475	VSVA-B-T22C-AZH-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	8033476	VSVA-B-T22CV-AZH-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	8033464	VSVA-B-T32U-AZH-A2-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	8033462	VSVA-B-T32C-AZH-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	8033466	VSVA-B-T32H-AZH-A2-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	8033465	VSVA-B-T32F-AZH-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	18 mm	8033463	VSVA-B-T32N-AZH-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	8033467	VSVA-B-T32W-AZH-A2-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	18 mm	8033470	VSVA-B-M52-AZH-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	8033471	VSVA-B-M52-MZH-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	8033468	VSVA-B-B52-ZH-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	8033469	VSVA-B-D52-ZH-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	8033472	VSVA-B-P53U-ZH-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	8033474	VSVA-B-P53C-ZH-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	8033473	VSVA-B-P53E-ZH-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8039182	VSVA-B-P53ED-ZH-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8039191	VSVA-B-P53EP-ZH-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, me	P53AD	18 mm	8039185	VSVA-B-P53AD-ZH-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	18 mm	8040111	VSVA-B-P53BD-ZH-A2-1T1L

Ordering data – Solenoid	d valve VSV	'A with cover cap for MO, concealed				
		Valve function	Valve	Width	Part no.	Туре
	code		code			
Solenoid valves	Luc		Tank	140	0000100	VOVA B TOOK AT AD ATAL
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	18 mm	8033493	VSVA-B-T22C-AZ-A2-1T1L
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	18 mm	8033494	VSVA-B-T22CV-AZ-A2-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	18 mm	8033482	VSVA-B-T32U-AZ-A2-1T1L
	К	2x 3/2-way valve, single solenoid, normally closed	T32C	18 mm	8033480	VSVA-B-T32C-AZ-A2-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	18 mm	8033484	VSVA-B-T32H-AZ-A2-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	18 mm	8033483	VSVA-B-T32F-AZ-A2-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	18 mm	8033481	VSVA-B-T32N-AZ-A2-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	18 mm	8033485	VSVA-B-T32W-AZ-A2-1T1L
	М	5/2-way valve, single solenoid, pneumatic spring return	M52-A	18 mm	8033488	VSVA-B-M52-AZ-A2-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	18 mm	8033489	VSVA-B-M52-MZ-A2-1T1L
	J	5/2-way valve, double solenoid	B52	18 mm	8033486	VSVA-B-B52-Z-A2-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	18 mm	8033487	VSVA-B-D52-Z-A2-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	18 mm	8033490	VSVA-B-P53U-Z-A2-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	18 mm	8033492	VSVA-B-P53C-Z-A2-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	18 mm	8033491	VSVA-B-P53E-Z-A2-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	18 mm	8039183	VSVA-B-P53ED-Z-A2-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	18 mm	8039192	VSVA-B-P53EP-Z-A2-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	18 mm	8039186	VSVA-B-P53AD-Z-A2-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	18 mm	8040112	VSVA-B-P53BD-Z-A2-1T1L

#### Datasheet – Solenoid valve width 26 mm

- **[]** - Valve width to ISO 15407-2 26 mm

Flow rate
Valve width 26 mm:
VTSA up to 1100 l/min
VTSA-F up to 1350 l/min





Safety characteristics – Valve, width 26 mm					
Conforms to standard		EN 13849-1/2			
CE marking (see declaration of Direct voltage		To EU EMC Directive <sup>1)</sup> (solenoid valves with sensor only)			
conformity)	24 V DC				
Shock resistance		Shock test with severity level 2, to EN 60068-2-27			
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6			

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... 

Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety characteristics – Valve, width 26 mm					
Valve function (with valve code)		Test pulses	es		
	nal	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]		
	code				
5/2-way double solenoid (B52)	J	1200	1100		
5/2-way double solenoid with dominant signal (D52)	D	1200	1100		
5/2-way single solenoid (M52A)	M	1200	1100		
5/2-way single solenoid (M52M)	0	1200	1100		
5/3-way closed (P53C)	G	1200	1100		
5/3-way exhausted (P53E)	E	1200	1100		
5/3-way pressurised (P53U)	В	1200	1100		
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1200	1100		
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1200	1100		
5/3-way, port 2 pressurised, 4 exhausted, switching position	SB	1200	1100		
14 detenting (P53AD)					
5/3-way, port 4 pressurised, 2 exhausted, switching position	SD	1200	1100		
14 detenting (P53BD)					
2x3/2-way single solenoid, closed (T32C)	K	1500	1200		
2x3/2-way single solenoid, open (T32U)	N	1500	1200		
2x3/2-way single solenoid, open/closed (T32H)	Н	1500	1200		
2x3/2-way single solenoid, closed (T32N)	Q	1500	1200		
2x3/2-way single solenoid, open (T32F)	Р	1500	1200		
2x3/2-way single solenoid, open/closed (T32W)	R	1500	1200		
2x2/2-way single solenoid, closed (T22C)	VC	1500	1200		
2x2/2-way single solenoid, closed (T22CV)	VV	1500	1200		

## Datasheet – Solenoid valve width 26 mm

Technical data – Valve, width 26 mm							
Valve function (with valve code)	Terminal code	Flow direction			Reset method		Weight
		any	reversible only	not reversible	pneumatic spring	mechanical spring	[g]
5/2-way double solenoid (B52)	J	•	-	-	_	-	276
5/2-way double solenoid with dominant signal (D52)	D	•	-	_	-	-	276
5/2-way single solenoid (M52A)	M	•	-	_	•	-	293
5/2-way single solenoid (M52M)	0	•	-	-	-	•	293
5/3-way closed <sup>1)</sup> (P53C)	G	•	-	-	-	•	320
5/3-way exhausted <sup>1)</sup> (P53E)	E	•	-	-	-	•	320
5/3-way pressurised <sup>1)</sup> (P53U)	В	•	-	_	-	•	320
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	-	-	•	-	•	291
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	-	-	•	-	•	291
5/3-way, port 2 pressurised, 4 exhausted, switching position	SB	•	-	-	-	•	301
14 detenting (P53AD)							
5/3-way, port 4 pressurised, 2 exhausted, switching position	SD	-	_	•	_	-	301
14 detenting (P53BD)							
2x3/2-way single solenoid, closed (T32C)	K	-	-	•		-	335
2x3/2-way single solenoid, open (T32U)	N	-	_	-	•	-	335
2x3/2-way single solenoid, open/closed (T32H)	Н	-	-	•	•	-	335
2x3/2-way single solenoid, closed (T32N)	Q	-	•	_	•	-	335
2x3/2-way single solenoid, open (T32F)	Р	-	•	_	•	-	335
2x3/2-way single solenoid, open/closed (T32W)	R	-	•	-	•	-	335
2x2/2-way single solenoid, closed (T22C)	VC	-	-	•	•	-	335
2x2/2-way single solenoid, closed (T22CV)	VV	•	-	-	•	-	335

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

#### Datasheet - Solenoid valve width 26 mm

Valve function (with valve code)		Flow					
		Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve on individual sub base		
5/2-way double solenoid (B52)	J	1400	1100	1350	1200		
5/2-way double solenoid with dominant signal (D52)	D	1400	1100	1350	1200		
5/2-way single solenoid (M52A)	М	1400	1100	1350	1200		
5/2-way single solenoid (M52M)	0	1400	1100	1350	1200		
5/3-way closed (P53C)	G	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted (P53E)	Е	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way pressurised (P53U)	В	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1400 <sup>1)</sup> 700 <sup>2)</sup>	1000 <sup>1)</sup> 700 <sup>2)</sup>	1350 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>		
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	-	850 <sup>1)</sup> 820 <sup>2)</sup>	950 <sup>1)</sup> 860 <sup>2)</sup>	900 <sup>1)</sup> 840 <sup>2)</sup>		
2x3/2-way single solenoid, closed (T32C)	K	1250	900	1150	1100		
2x3/2-way single solenoid, open (T32U)	N	1250	900	1150	1100		
2x3/2-way single solenoid, open/closed (T32H)	Н	1250	900	1150	1100		
2x3/2-way single solenoid, closed (T32N)	Q	1250	900	1150	1100		
2x3/2-way single solenoid, open (T32F)	Р	1250	900	1150	1100		
2x3/2-way single solenoid, open/closed (T32W)	R	1250	900	1150	1100		
2x2/2-way single solenoid, closed (T22C)	VC	1350	1000	1300	1100		
2x2/2-way single solenoid, closed (T22CV)	VV	1350	1000	1300	1100		

<sup>1)</sup> Switching position

## - 🏺 - Note

The solenoid valves VSVA-B-P53BD...-A1-1T1L (terminal code SD) can be operated without restrictions at an operating pressure of less than 6 bar. At an operating pressure of more than 6 bar, the actual flow rate must not exceed 1900 l/min (e.g. 10-->2 bar), otherwise these solenoid valves may switch unintentionally (to the mid-position or switching position 14).

At high pressures, this can be achieved, for example, using a flow control valve/orifice. (e.g. a reducing nipple on port 2 or 4 to reduce it from G1/4 to G1/8).

<sup>2)</sup> Mid-position

#### Datasheet – Solenoid valve width 26 mm

Valve switching times in [ms], width 26 mm Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	-	18
5/2-way double solenoid with dominant signal (D52)	D	=	-	21
5/2-way single solenoid (M52A)	M	25	45	-
5/2-way single solenoid (M52M)	0	20	65	-
5/3-way closed (P53C)	G	22	65	-
5/3-way exhausted (P53E)	E	22	65	-
5/3-way pressurised (P53U)	В	22	65	-
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	22 for control side 12 9 for control side 14	49 for control side 12	33
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	10 for control side 12 22 for control side 14	50 for control side 14	40
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	SB	19 for control side 12 9 for control side 14	36 for control side 12	32
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	16 for control side 12 9 for control side 14	26 for control side 12 36 for control side 14	-
2x3/2-way single solenoid, closed (T32C)	К	20	38	-
2x3/2-way single solenoid, open (T32U)	N	20	38	-
2x3/2-way single solenoid, open/closed (T32H)	Н	20	38	-
2x3/2-way single solenoid, closed (T32N)	Q	32	30	-
2x3/2-way single solenoid, open (T32F)	Р	32	30	_
2x3/2-way single solenoid, open/closed (T32W)	R	32	30	-
2x2/2-way single solenoid, closed (T22C)	VC	20	38	_
2x2/2-way single solenoid, closed (T22CV)	W	20	38	-

Characteristic coil data, width 26 mm							
Valve function (with valve code)	Terminal	Characteristic coil data at 24 V DC in [W]					
	code						
5/2-way double solenoid (B52)	J	1.6					
5/2-way double solenoid with dominant signal (D52)	D	1.3					
5/2-way single solenoid (M52A)	M	1.6					
5/2-way single solenoid (M52M)	0	1.6					
5/3-way closed (P53C)	G	1.6					
5/3-way exhausted (P53E)	E	1.6					
5/3-way pressurised (P53U)	В	1.6					
5/3-way exhausted, switching position 14 detenting (P53ED)	SA	1.6					
5/3-way exhausted, switching position 12 detenting (P53EP)	SE	1.6					
5/3-way, port 2 pressurised, 4 exhausted, switching position 14	SB	1.6					
detenting (P53AD)							
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	SD	1.6					
2x3/2-way single solenoid, closed (T32C)	К	1.3					
2x3/2-way single solenoid, open (T32U)	N	1.3					
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3					
2x3/2-way single solenoid, closed (T32N)	Q	1.3					
2x3/2-way single solenoid, open (T32F)	Р	1.3					
2x3/2-way single solenoid, open/closed (T32W)	R	1.3					
2x2/2-way single solenoid, closed (T22C)	VC	1.3					
2x2/2-way single solenoid, closed (T22CV)	VV	1.3					

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

Ordering data - Solenoic		A, MO non-detenting/detenting (D)	1		1	I
	Terminal code	Valve function	Valve code	Width	Part no.	Туре
Solenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	26 mm	561149	VSVA-B-T22C-AZD-A1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	561153	VSVA-B-T22CV-AZD-A1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	539152	VSVA-B-T32U-AZD-A1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	539150	VSVA-B-T32C-AZD-A1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	539154	VSVA-B-T32H-AZD-A1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	539153	VSVA-B-T32F-AZD-A1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	539151	VSVA-B-T32N-AZD-A1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	539155	VSVA-B-T32W-AZD-A1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	539158	VSVA-B-M52-AZD-A1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	539159	VSVA-B-M52-MZD-A1-1T1L
	J	5/2-way valve, double solenoid	B52	26 mm	539156	VSVA-B-B52-ZD-A1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	539157	VSVA-B-D52-ZD-A1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	26 mm	539160	VSVA-B-P53U-ZD-A1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	539162	VSVA-B-P53C-ZD-A1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	539161	VSVA-B-P53E-ZD-A1-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	26 mm	560727	VSVA-B-P53ED-ZD-A1-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	26 mm	8026638	VSVA-B-P53EP-ZD-A1-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	26 mm	560728	VSVA-B-P53AD-ZD-A1-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	26 mm	8031816	VSVA-B-P53BD-ZD-A1-1T1L

	Termina	al Valve function	Valve	Width	dth Part no.	Туре	
	code		code			71.	
enoid valves		<del>'</del>			-	•	
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	26 mm	8033032	VSVA-B-T22C-AZTR-A1-1T1L	
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	8033033	VSVA-B-T22CV-AZTR-A1-1T1L	
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	8033015	VSVA-B-T32U-AZTR-A1-1T1L	
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	8033013	VSVA-B-T32C-AZTR-A1-1T1L	
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	8033017	VSVA-B-T32H-AZTR-A1-1T1L	
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	8033016	VSVA-B-T32F-AZTR-A1-1T1L	
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	8033014	VSVA-B-T32N-AZTR-A1-1T1L	
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	8033018	VSVA-B-T32W-AZTR-A1-1T1L	
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	8033021	VSVA-B-M52-AZTR-A1-1T1L	
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	8033022	VSVA-B-M52-MZTR-A1-1T1L	
	J	5/2-way valve, double solenoid	B52	26 mm	8033019	VSVA-B-B52-ZTR-A1-1T1L	
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	8033020	VSVA-B-D52-ZTR-A1-1T1L	
	В	5/3-way solenoid valve, mid-position pressurised	P53U	26 mm	8033023	VSVA-B-P53U-ZTR-A1-1T1L	
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	8033025	VSVA-B-P53C-ZTR-A1-1T1L	
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	8033024	VSVA-B-P53E-ZTR-A1-1T1L	
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	26 mm	8033028	VSVA-B-P53ED-ZTR-A1-1T1L	
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	26 mm	8033035	VSVA-B-P53EP-ZTR-A1-1T1L	
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	26 mm	8033029	VSVA-B-P53AD-ZTR-A1-1T1L	
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	26 mm	8039187	VSVA-B-P53BD-ZTR-A1-1T1L	

	Termina	Valve function	Valve	Width	Part no.	Туре
	code		code			Nr.
enoid valves	_		•	_		
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	26 mm	8033055	VSVA-B-T22C-AZH-A1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	8033056	VSVA-B-T22CV-AZH-A1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	8033038	VSVA-B-T32U-AZH-A1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	8033036	VSVA-B-T32C-AZH-A1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	8033040	VSVA-B-T32H-AZH-A1-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	8033039	VSVA-B-T32F-AZH-A1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	8033037	VSVA-B-T32N-AZH-A1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	8033041	VSVA-B-T32W-AZH-A1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	8033044	VSVA-B-M52-AZH-A1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	8033045	VSVA-B-M52-MZH-A1-1T1L
	J	5/2-way valve, double solenoid	B52	26 mm	8033042	VSVA-B-B52-ZH-A1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	8033043	VSVA-B-D52-ZH-A1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	26 mm	8033046	VSVA-B-P53U-ZH-A1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	8033048	VSVA-B-P53C-ZH-A1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	8033047	VSVA-B-P53E-ZH-A1-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechan- ical spring return	P53ED	26 mm	8033051	VSVA-B-P53ED-ZH-A1-1T1
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechan- ical spring return	P53EP	26 mm	8033058	VSVA-B-P53EP-ZH-A1-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	26 mm	8033052	VSVA-B-P53AD-ZH-A1-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	26 mm	8039188	VSVA-B-P53BD-ZH-A1-1T1L

Ordering data – Soleno		/A with cover cap for MO, concealed	Lui	Lucio	ls .	1-
		Valve function	Valve code	Width	Part no.	Туре
	code		code			
Solenoid valves	VC	2x 2/2-way valve, single solenoid,	T22C	26 mm	8033078	VSVA-B-T22C-AZ-A1-1T1L
	VC	normally closed, pneumatic spring return	1220	20 111111	8033078	V3VA-D-122C-A2-A1-111E
	VV	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	26 mm	8033079	VSVA-B-T22CV-AZ-A1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	26 mm	8033061	VSVA-B-T32U-AZ-A1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	26 mm	8033059	VSVA-B-T32C-AZ-A1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	26 mm	8033063	VSVA-B-T32H-AZ-A1-1T1L
	P	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	26 mm	8033062	VSVA-B-T32F-AZ-A1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	26 mm	8033060	VSVA-B-T32N-AZ-A1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	26 mm	8033064	VSVA-B-T32W-AZ-A1-1T1L
	М	5/2-way valve, single solenoid, pneumatic spring return	M52-A	26 mm	8033067	VSVA-B-M52-AZ-A1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	26 mm	8033068	VSVA-B-M52-MZ-A1-1T1L
	J	5/2-way valve, double solenoid	B52	26 mm	8033065	VSVA-B-B52-Z-A1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	26 mm	8033066	VSVA-B-D52-Z-A1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	26 mm	8033069	VSVA-B-P53U-Z-A1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	26 mm	8033071	VSVA-B-P53C-Z-A1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	26 mm	8033070	VSVA-B-P53E-Z-A1-1T1L
	SA	5/3-way solenoid valve, mid-position exhausted, switching position 14 detenting, mechanical spring return	P53ED	26 mm	8033074	VSVA-B-P53ED-Z-A1-1T1L
	SE	5/3-way solenoid valve, mid-position exhausted, switching position 12 detenting, mechanical spring return	P53EP	26 mm	8033081	VSVA-B-P53EP-Z-A1-1T1L
	SB	5/3-way solenoid valve, mid-position 1x exhausted from 4 to 5, 1x pressurised from 1 to 2, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 4 and exhausted from 2 to 3, mechanical spring return	P53AD	26 mm	8033075	VSVA-B-P53AD-Z-A1-1T1L
	SD	5/3-way solenoid valve, mid-position 1x exhausted from 2 to 3, 1x pressurised from 1 to 4, switching position 14 detenting, same function in both switching positions: pressurised from 1 to 2 and exhausted from 4 to 5, mechanical spring return	P53BD	26 mm	8039189	VSVA-B-P53BD-Z-A1-1T1L

#### Datasheet – Solenoid valve width 42 mm

- **[]** - Valve width to ISO 5599-2 42 mm (ISO 1)

Flow rate
Width 42 mm:
VTSA up to 1300 l/min
VTSA-F up to 1860 l/min





Safety characteristics – Valve, width 42 mm						
Conforms to standard	EN 13849-1/2					
Shock resistance	Shock test with severity level 2, to EN 60068-2-27					
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6					

Valve function (with valve code)	Terminal	Test pulses	
	code	Max. positive test pulse with 0 signal [µs]	Max. negative test pulse with 1 signal [µs]
5/2-way double solenoid (B52)	J	1400	900
5/2-way double solenoid with dominant signal (D52)	D	1600	1100
5/2-way single solenoid (M52A)	M	1400	900
5/2-way single solenoid (M52M)	0	1400	900
5/3-way closed (P53C)	G	1400	900
5/3-way exhausted (P53E)	E	1400	900
5/3-way pressurised (P53U)	В	1400	900
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	-	-
2x3/2-way single solenoid, closed (T32C)	K	1600	1100
2x3/2-way single solenoid, open (T32U)	N	1600	1100
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1100
2x3/2-way single solenoid, closed (T32N)	Q	1600	1100
2x3/2-way single solenoid, open (T32F)	Р	1600	1100
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1100
2x2/2-way single solenoid, closed (T22C)	VC	1600	1100
2x2/2-way single solenoid, closed (T22CV)	VV	1600	1100

#### Datasheet – Solenoid valve width42 mm

Valve function (with valve code)	Terminal	Flow direction			Reset method		Weight
	code	Any	reversible only	Not reversible	Pneumatic spring	Mechanical spring	[g]
5/2-way double solenoid (B52)	J		_	-	-	-	439
5/2-way double solenoid with dominant signal (D52)	D	•	_	-	-	-	439
5/2-way single solenoid (M52A)	M		_	_	•	-	426
5/2-way single solenoid (M52M)	0	-	-	-	-	•	426
5/3-way closed <sup>1)</sup> (P53C)	G	•	-	-	-	•	456
5/3-way exhausted <sup>1)</sup> (P53E)	E		_	_	-	•	456
5/3-way pressurised <sup>1)</sup> (P53U)	В	•	-	-	-	•	456
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	-	-	-	-	-	456
2x3/2-way single solenoid, closed (T32C)	K	-	-	•	•	-	442
2x3/2-way single solenoid, open (T32U)	N	-	-	•	•	-	442
2x3/2-way single solenoid, open/closed (T32H)	Н	-	-	•	•	-	442
2x3/2-way single solenoid, closed (T32N)	Q	-	•	-	•	-	442
2x3/2-way single solenoid, open (T32F)	Р	-	•	-	•	-	442
2x3/2-way single solenoid, open/closed (T32W)	R	-	•	-	•	-	442
2x2/2-way single solenoid, closed (T22C)	VC	-	-	•	•	-	442
2x2/2-way single solenoid, closed (T22CV)	VV	•	_	-	•	_	442

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve function (with valve code)	Terminal	Flow						
	code	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve on individual sub- base			
5/2-way double solenoid (B52)	J	2000	1300	1860	1500			
5/2-way double solenoid with dominant signal (D52)	D	2000	1300	1860	1500			
5/2-way single solenoid (M52A)	M	2000	1300	1860	1500			
5/2-way single solenoid (M52M)	0	2000	1300	1860	1500			
5/3-way closed (P53C)	G	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>			
5/3-way exhausted (P53E)	E	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>			
5/3-way pressurised (P53U)	В	1900 <sup>1)</sup> 950 <sup>2)</sup>	1200 <sup>1)</sup> 800 <sup>2)</sup>	1690 <sup>1)</sup> 830 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>			
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	1700 <sup>1)</sup> 700 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>	1700 <sup>1)</sup> 700 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>			
2x3/2-way single solenoid, closed (T32C)	K	1600	1200	1300	1200			
2x3/2-way single solenoid, open (T32U)	N	1600	1200	1300	1200			
2x3/2-way single solenoid, open/closed (T32H)	Н	1600	1200	1300	1200			
2x3/2-way single solenoid, closed (T32N)	Q	1600	1200	1300	1200			
2x3/2-way single solenoid, open (T32F)	Р	1600	1200	1300	1200			
2x3/2-way single solenoid, open/closed (T32W)	R	1600	1200	1300	1200			
2x2/2-way single solenoid, closed (T22C)	VC	1600	1400	1500	1400			
2x2/2-way single solenoid, closed (T22CV)	W	1600	1400	1500	1400			

<sup>1)</sup> Switching position

Mid-position

#### Datasheet – Solenoid valve width 42 mm

Valve switching times in [ms], width 42 mm				
Valve function (with valve code)	Terminal code	On	Off	Changeover
5/2-way double solenoid (B52)	J	-	_	16
5/2-way double solenoid with dominant signal (D52)	D	-	-	19
5/2-way single solenoid (M52A)	M	27	45	-
5/2-way single solenoid (M52M)	0	22	60	-
5/3-way closed (P53C)	G	22	65	38
5/3-way exhausted (P53E)	E	22	65	38
5/3-way pressurised (P53U)	В	22	65	38
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	22	65	38
2x3/2-way single solenoid, closed (T32C)	K	20	38	-
2x3/2-way single solenoid, open (T32U)	N	20	38	-
2x3/2-way single solenoid, open/closed (T32H)	Н	20	38	-
2x3/2-way single solenoid, closed (T32N)	Q	34	28	-
2x3/2-way single solenoid, open (T32F)	Р	34	28	-
2x3/2-way single solenoid, open/closed (T32W)	R	34	28	-
2x2/2-way single solenoid, closed (T22C)	VC	20	38	-
2x2/2-way single solenoid, closed (T22CV)	VV	20	38	-

Characteristic coil data, width 42 mm		
Valve function (with valve code)	Terminal code	[W]
5/2-way double solenoid (B52)	J	1.6
5/2-way double solenoid with dominant signal (D52)	D	1.3
5/2-way single solenoid (M52A)	M	1.6
5/2-way single solenoid (M52M)	0	1.6
5/3-way closed (P53C)	G	1.6
5/3-way exhausted (P53E)	E	1.6
5/3-way pressurised (P53U)	В	1.6
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	1.6
2x3/2-way single solenoid, closed (T32C)	K	1.3
2x3/2-way single solenoid, open (T32U)	N	1.3
2x3/2-way single solenoid, open/closed (T32H)	Н	1.3
2x3/2-way single solenoid, closed (T32N)	Q	1.3
2x3/2-way single solenoid, open (T32F)	P	1.3
2x3/2-way single solenoid, open/closed (T32W)	R	1.3
2x2/2-way single solenoid, closed (T22C)	VC	1.3
2x2/2-way single solenoid, closed (T22CV)	VV	1.3

Max. current consumption per solenoid coil							
Туре		T22, T32	B52, D52, M52, P53				
At nominal voltage 24 V DC (valves with holdin	At nominal voltage 24 V DC (valves with holding current reduction)						
Nominal pick-up current	[mA]	60	72				
Nominal current following current reduction	[mA]	-	-				
Time until current reduction	[ms]	30	30				

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

	Terminal code	Valve function with MO detenting/non-detenting (D)	Valve code	Width	Part no.	Туре
enoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	561340	VSVA-B-T22C-AZD-D1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	561344	VSVA-B-T22CV-AZD-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	543692	VSVA-B-T32U-AZD-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	543690	VSVA-B-T32C-AZD-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	543694	VSVA-B-T32H-AZD-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	543693	VSVA-B-T32F-AZD-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	543691	VSVA-B-T32N-AZD-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	543695	VSVA-B-T32W-AZD-D1-1T1L
	M	5/2-way valve, single solenoid, Pneumatic spring return	M52-A	42 mm	543698	VSVA-B-M52-AZD-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	543699	VSVA-B-M52-MZD-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	543696	VSVA-B-B52-ZD-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	543697	VSVA-B-D52-ZD-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	543700	VSVA-B-P53U-ZD-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	543702	VSVA-B-P53C-ZD-D1-1T1L
	Е	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	543701	VSVA-B-P53E-ZD-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8000464	VSVA-B-P53F-ZD-D1-1T1L

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
d valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034781	VSVA-B-T22C-AZTR-D1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034782	VSVA-B-T22CV-AZTR-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034770	VSVA-B-T32U-AZTR-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034768	VSVA-B-T32C-AZTR-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	Т32Н	42 mm	8034772	VSVA-B-T32H-AZTR-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034771	VSVA-B-T32F-AZTR-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	8034769	VSVA-B-T32N-AZTR-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034773	VSVA-B-T32W-AZTR-D1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	42 mm	8034776	VSVA-B-M52-AZTR-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034777	VSVA-B-M52-MZTR-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034774	VSVA-B-B52-ZTR-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034775	VSVA-B-D52-ZTR-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034778	VSVA-B-P53U-ZTR-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034780	VSVA-B-P53C-ZTR-D1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034779	VSVA-B-P53E-ZTR-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034783	VSVA-B-P53F-ZTR-D1-1T1L

Ordering data – Sole	1	'A with cover cap for MO, non-detenting (H)  Valve function with MO non-detenting (H)	Valve code	Width	Part no.	Туре
olenoid valves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034812	VSVA-B-T22C-AZH-D1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034813	VSVA-B-T22CV-AZH-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034801	VSVA-B-T32U-AZH-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034799	VSVA-B-T32C-AZH-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	8034803	VSVA-B-T32H-AZH-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034802	VSVA-B-T32F-AZH-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	8034800	VSVA-B-T32N-AZH-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034804	VSVA-B-T32W-AZH-D1-1T1L
	М	5/2-way valve, single solenoid, Pneumatic spring return	M52-A	42 mm	8034807	VSVA-B-M52-AZH-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034808	VSVA-B-M52-MZH-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034805	VSVA-B-B52-ZH-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034806	VSVA-B-D52-ZH-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034809	VSVA-B-P53U-ZH-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034811	VSVA-B-P53C-ZH-D1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034810	VSVA-B-P53E-ZH-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034814	VSVA-B-P53F-ZH-D1-1T1L

	Terminal code	Valve function	Valve code	Width	Part no.	Туре
alves						
	VC	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return	T22C	42 mm	8034843	VSVA-B-T22C-AZ-D1-1T1L
	W	2x 2/2-way valve, single solenoid, normally closed, pneumatic spring return, vacuum operation possible at 3 and 5	T22CV	42 mm	8034844	VSVA-B-T22CV-AZ-D1-1T1L
	N	2x 3/2-way valve, single solenoid, normally open	T32U	42 mm	8034832	VSVA-B-T32U-AZ-D1-1T1L
	K	2x 3/2-way valve, single solenoid, normally closed	T32C	42 mm	8034830	VSVA-B-T32C-AZ-D1-1T1L
	Н	2x 3/2-way valve, single solenoid, 1x normally open, 1x normally closed	T32H	42 mm	8034834	VSVA-B-T32H-AZ-D1-1T1L
	Р	2x 3/2-way valve, single solenoid, reverse operation, normally open	T32F	42 mm	8034833	VSVA-B-T32F-AZ-D1-1T1L
	Q	2x 3/2-way valve, single solenoid, reverse operation, normally closed	T32N	42 mm	8034831	VSVA-B-T32N-AZ-D1-1T1L
	R	2x 3/2-way valve, single solenoid, reverse operation, 1x normally open, 1x normally closed	T32W	42 mm	8034835	VSVA-B-T32W-AZ-D1-1T1L
	M	5/2-way valve, single solenoid, pneumatic spring return	M52-A	42 mm	8034838	VSVA-B-M52-AZ-D1-1T1L
	0	5/2-way valve, single solenoid, mechanical spring return	M52-M	42 mm	8034839	VSVA-B-M52-MZ-D1-1T1L
	J	5/2-way valve, double solenoid	B52	42 mm	8034836	VSVA-B-B52-Z-D1-1T1L
	D	5/2-way valve, double solenoid, with dominant signal	D52	42 mm	8034837	VSVA-B-D52-Z-D1-1T1L
	В	5/3-way solenoid valve, mid-position pressurised	P53U	42 mm	8034840	VSVA-B-P53U-Z-D1-1T1L
	G	5/3-way solenoid valve, mid-position closed	P53C	42 mm	8034842	VSVA-B-P53C-Z-D1-1T1L
	E	5/3-way solenoid valve, mid-position exhausted	P53E	42 mm	8034841	VSVA-B-P53E-Z-D1-1T1L
	VG	5/3-way solenoid valve, mid-position pressurised 1 to 2, 4 to 5 closed	P53F	42 mm	8034845	VSVA-B-P53F-Z-D1-1T1L

#### Datasheet – Solenoid valve width 52 mm

Valve width to ISO 5599-2 52 mm (ISO 2)

- N - Flow rate
Width 52 mm:
VTSA up to 2900 l/min
VTSA-F up to 2900 l/min





Safety characteristics for valve		
Conforms to standard		EN 13849-1/2
CE marking (see declaration of	Direct voltage	To EU EMC Directive 1)
conformity)	24 V DC	
KC marking		KCEMC
Shock resistance		Shock test with severity level 2, to EN 60068-2-27
Vibration resistant		Transport application test with severity level 2, to EN 60068-2-6

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... -> Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety characteristics – Valve, width 52 mm							
Valve function (with valve code)	Terminal	Test pulses					
	code	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]				
5/2-way double solenoid (B52)	J	1000	3500				
5/2-way double solenoid with dominant signal (D52)	D	1000	3500				
5/2-way single solenoid (M52A)	M	1000	3500				
5/2-way single solenoid (M52M)	0	1000	3500				
5/3-way closed (P53C)	G	1000	3500				
5/3-way exhausted (P53E)	E	1000	3500				
5/3-way pressurised (P53U)	В	1000	3500				
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	-	-				
2x3/2-way single solenoid, closed (T32C)	K	1000	3500				
2x3/2-way single solenoid, open (T32U)	N	1000	3500				
2x3/2-way single solenoid, open/closed (T32H)	Н	1000	3500				
2x3/2-way single solenoid, closed (T32N)	Q	1000	3500				
2x3/2-way single solenoid, open (T32F)	Р	1000	3500				
2x3/2-way single solenoid, open/closed (T32W)	R	1000	3500				
2x2/2-way single solenoid, closed (T22C)	VC	1000	3500				

#### Datasheet – Solenoid valve width 52 mm

Technical data – Valve, width 52 mm							
Valve function (with valve code)	Terminal	Flow direction			Reset method		Weight
	code	any	reversible only	not reversible	pneumatic spring	mechanical spring	[g]
5/2-way double solenoid (B52)	J	•	-	_	-	_	732
5/2-way double solenoid with dominant signal (D52)	D		-	-	_	_	732
5/2-way single solenoid (M52A)	M	•	-	-	•	_	702
5/2-way single solenoid (M52M)	0	•	-	-	-	•	702
5/3-way closed <sup>1)</sup> (P53C)	G	•	-	-	-	•	780
5/3-way exhausted <sup>1)</sup> (P53E)	E		-	_	-	•	780
5/3-way pressurised <sup>1)</sup> (P53U)	В	•	_	_	_	•	780
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG		-	-	-	_	780
2x3/2-way single solenoid, closed (T32C)	K	-	-	•	•	_	740
2x3/2-way single solenoid, open (T32U)	N	-	-	•	•	_	740
2x3/2-way single solenoid, open/closed (T32H)	Н	-	-	•	•	_	740
2x3/2-way single solenoid, closed (T32N)	Q	-	•	-	•	_	740
2x3/2-way single solenoid, open (T32F)	Р	_	•	-	•	_	740
2x3/2-way single solenoid, open/closed (T32W)	R	-	•	-	•	_	740
2x2/2-way single solenoid, closed (T22C)	VC	-	-	•	•	-	740

If neither solenoid coil is energised, the valve is moved to its mid-position by spring force.
 If both solenoid coils are energised at the same time, the valve remains in the previously assumed switching position.

Valve function (with valve code)	Terminal	Flow	Flow					
	code	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve on individual sub- base			
5/2-way double solenoid (B52)	J	4000	2900	2900	3400			
5/2-way double solenoid with dominant signal (D52)	D	4000	2900	2900	3400			
5/2-way single solenoid (M52A)	M	4000	2900	2900	3400			
5/2-way single solenoid (M52M)	0	4000	2900	2900	3400			
5/3-way closed (P53C)	G	3600 <sup>1)</sup>	2800 <sup>1)</sup>	2800 <sup>1)</sup>	3200 <sup>1)</sup>			
		1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>			
5/3-way exhausted (P53E)	E	3600 <sup>1)</sup>	2800 <sup>1)</sup>	2800 <sup>1)</sup>	3200 <sup>1)</sup>			
		1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>			
5/3-way pressurised (P53U)	В	3600 <sup>1)</sup>	2800 <sup>1)</sup>	2800 <sup>1)</sup>	3200 <sup>1)</sup>			
		1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>	1700 <sup>2)</sup>			
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	30001)	2300 <sup>1)</sup>	2300 <sup>1)</sup>	26001)			
		900 <sup>2)</sup>	900 <sup>2)</sup>	900 <sup>2)</sup>	900 <sup>2)</sup>			
2x3/2-way single solenoid, closed (T32C)	K	3000	2400	2400	2600			
2x3/2-way single solenoid, open (T32U)	N	3000	2400	2400	2600			
2x3/2-way single solenoid, open/closed (T32H)	Н	3000	2400	2400	2600			
2x3/2-way single solenoid, closed (T32N)	Q	3000	2400	2400	2600			
2x3/2-way single solenoid, open (T32F)	Р	3000	2400	2400	2600			
2x3/2-way single solenoid, open/closed (T32W)	R	3000	2400	2400	2600			
2x2/2-way single solenoid, closed (T22C)	VC	4000	2800	2800	3400			

<sup>1)</sup> Switching position

<sup>2)</sup> Mid-position

#### Datasheet – Solenoid valve width52 mm

Valve switching times in [ms], width 52 mm							
Valve function (with valve code)	Terminal code	On	Off	Changeover			
5/2-way double solenoid (B52)	J	=	-	18			
5/2-way double solenoid with dominant signal (D52)	D	-	-	18			
5/2-way single solenoid (M52A)	M	40	45	-			
5/2-way single solenoid (M52M)	0	20	60	_			
5/3-way closed (P53C)	G	23	60	38			
5/3-way exhausted (P53E)	E	23	60	38			
5/3-way pressurised (P53U)	В	23	60	38			
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	23	60	38			
2x3/2-way single solenoid, closed (T32C)	K	20	35	_			
2x3/2-way single solenoid, open (T32U)	N	20	35	_			
2x3/2-way single solenoid, open/closed (T32H)	Н	20	35	_			
2x3/2-way single solenoid, closed (T32N)	Q	20	35	_			
2x3/2-way single solenoid, open (T32F)	P	20	35	-			
2x3/2-way single solenoid, open/closed (T32W)	R	20	35	-			
2x2/2-way single solenoid, closed (T22C)	VC	14	35	_			

Characteristic coil data, width 52 mm		
Valve function (with valve code)	Terminal code	[W]
5/2-way double solenoid (B52)	J	4.6
5/2-way double solenoid with dominant signal (D52)	D	4.6
5/2-way single solenoid (M52A)	M	4.6
5/2-way single solenoid (M52M)	0	4.6
5/3-way closed (P53C)	G	4.6
5/3-way exhausted (P53E)	E	4.6
5/3-way pressurised (P53U)	В	4.6
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F)	VG	4.6
2x3/2-way single solenoid, closed (T32C)	K	4.6
2x3/2-way single solenoid, open (T32U)	N	4.6
2x3/2-way single solenoid, open/closed (T32H)	Н	4.6
2x3/2-way single solenoid, closed (T32N)	Q	4.6
2x3/2-way single solenoid, open (T32F)	Р	4.6
2x3/2-way single solenoid, open/closed (T32W)	R	4.6
2x2/2-way single solenoid, closed (T22C)	VC	4.6

# Max. current consumption per solenoid coil, width 52 mm At nominal voltage 24 V DC (valves with holding current reduction) Nominal pick-up current [mA] 165 Nominal current following current reduction [mA] 35 Time until current reduction [ms] 30

Materials	
Housing	Die-cast aluminium, PA
Seals	FPM, NBR, HNBR
Screws	Galvanised steel
Note on materials	RoHS-compliant

	Terminal	Valve function	Valve	Width	Part no.	Туре
	code		code			
alves						
	VC	2x 2/2-way valve, single solenoid,	T22C	52 mm	560831	VSVA-B-T22C-AZD-D2-1T1L
		normally closed,				
P SPI		pneumatic spring return				
	N	2x 3/2-way valve, single solenoid,	T32U	52 mm	560827	VSVA-B-T32U-AZD-D2-1T1L
		normally open				
$\checkmark$	K	2x 3/2-way valve, single solenoid,	T32C	52 mm	560825	VSVA-B-T32C-AZD-D2-1T1L
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	52 mm	560829	VSVA-B-T32H-AZD-D2-1T1L
		1x normally open, 1x normally closed				
	P	2x 3/2-way valve, single solenoid,	T32F	52 mm	560828	VSVA-B-T32F-AZD-D2-1T1L
		reverse operation,				
		normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	52 mm	560826	VSVA-B-T32N-AZD-D2-1T1L
		reverse operation,				
	_	normally closed				
	R	2x 3/2-way valve, single solenoid,	T32W	52 mm	560830	VSVA-B-T32W-AZD-D2-1T1I
		reverse operation, 1x normally open, 1x normally closed				
			MEGA	F 2	540000	VCVA D MEO AZD DO AZAL
	M	5/2-way valve, single solenoid,	M52-A	52 mm	560820	VSVA-B-M52-AZD-D2-1T1L
	0	pneumatic spring return 5/2-way valve, single solenoid,	M52-M	52 mm	560821	VSVA-B-M52-MZD-D2-1T1L
	0	mechanical spring return	101.5 2-101	52 111111	360621	A2A4-D-M25-M7D-D5-111F
		5/2-way valve, double solenoid	B52	F2 mm	560818	VSVA-B-B52-ZD-D2-1T1L
	]	5/2-way valve, double solellold	D32	52 mm	200010	N2A-D-D25-7D-D5-111F
	D	5/2-way valve, double solenoid,	D52	52 mm	560819	VSVA-B-D52-ZD-D2-1T1L
		with dominant signal		32	300019	15000 552 25 52 1112
	В	5/3-way solenoid valve,	P53U	52 mm	560822	VSVA-B-P53U-ZD-D2-1T1L
	_	mid-position pressurised				
	G	5/3-way solenoid valve,	P53C	52 mm	560824	VSVA-B-P53C-ZD-D2-1T1L
		mid-position closed				
	E	5/3-way solenoid valve.	P53E	52 mm	560823	VSVA-B-P53E-ZD-D2-1T1L
		mid-position exhausted				
	VG	5/3-way solenoid valve,	P53F	52 mm	8000465	VSVA-B-P53F-ZD-D2-1T1L
		mid-position pressurised 1 to 2, 4 to 5 closed				

Ter	rminal	Valve function	Valve	Width	Part no.	Туре
cod	de		code			
VC		2x 2/2-way valve, single solenoid,	T22C	52 mm	8034967	VSVA-B-T22C-AZTR-D2-1T1
		normally closed,				
		pneumatic spring return				
N		2x 3/2-way valve, single solenoid,	T32U	52 mm	8034963	VSVA-B-T32U-AZTR-D2-1T1
<b>"</b>		normally open				
✓   K		2x 3/2-way valve, single solenoid,	T32C	52 mm	8034961	VSVA-B-T32C-AZTR-D2-1T1
		normally closed				
Н		2x 3/2-way valve, single solenoid,	T32H	52 mm	8034965	VSVA-B-T32H-AZTR-D2-1T1
		1x normally open, 1x normally closed				
Р		2x 3/2-way valve, single solenoid,	T32F	52 mm	8034964	VSVA-B-T32F-AZTR-D2-1T1
		reverse operation,				
		normally open				
Q		2x 3/2-way valve, single solenoid,	T32N	52 mm	8034962	VSVA-B-T32N-AZTR-D2-1T1
		reverse operation,				
		normally closed				
R		2x 3/2-way valve, single solenoid,	T32W	52 mm	8034966	VSVA-B-T32W-AZTR-D2-1T
		reverse operation,				
		1x normally open, 1x normally closed				
M		5/2-way valve, single solenoid,	M52-A	52 mm	8034956	VSVA-B-M52-AZTR-D2-1T1
		pneumatic spring return				
0		5/2-way valve, single solenoid,	M52-M	52 mm	8034957	VSVA-B-M52-MZTR-D2-1T1
		mechanical spring return				
J		5/2-way valve, double solenoid	B52	52 mm	8034954	VSVA-B-B52-ZTR-D2-1T1L
D		5/2-way valve, double solenoid,	D52	52 mm	8034955	VSVA-B-D52-ZTR-D2-1T1L
		with dominant signal				
В		5/3-way solenoid valve,	P53U	52 mm	8034958	VSVA-B-P53U-ZTR-D2-1T1L
		mid-position pressurised				
G		5/3-way solenoid valve,	P53C	52 mm	8034960	VSVA-B-P53C-ZTR-D2-1T1L
		mid-position closed				
E		5/3-way solenoid valve,	P53E	52 mm	8034959	VSVA-B-P53E-ZTR-D2-1T1L
		mid-position exhausted				
VG	ì	5/3-way solenoid valve,	P53F	52 mm	8034968	VSVA-B-P53F-ZTR-D2-1T1L
		mid-position pressurised 1 to 2, 4 to 5 closed				

		Valve function	Valve	Width	Part no.	Туре
	code		code			
l valves						
	VC	2x 2/2-way valve, single solenoid,	T22C	52 mm	8034982	VSVA-B-T22C-AZH-D2-1T1L
	<b>.</b>	normally closed,				
	<u>~</u>	pneumatic spring return				
<u> </u>	N	2x 3/2-way valve, single solenoid,	T32U	52 mm	8034978	VSVA-B-T32U-AZH-D2-1T1L
	•//	normally open				
7	K	2x 3/2-way valve, single solenoid,	T32C	52 mm	8034976	VSVA-B-T32C-AZH-D2-1T1L
		normally closed				
	Н	2x 3/2-way valve, single solenoid,	T32H	52 mm	8034980	VSVA-B-T32H-AZH-D2-1T1LL
		1x normally open, 1x normally closed				
	P	2x 3/2-way valve, single solenoid,	T32F	52 mm	8034979	VSVA-B-T32F-AZH-D2-1T1L
		reverse operation,				
		normally open				
	Q	2x 3/2-way valve, single solenoid,	T32N	52 mm	8034977	VSVA-B-T32N-AZH-D2-1T1L
		reverse operation,				
		normally closed		1		
	R	2x 3/2-way valve, single solenoid,	T32W	52 mm	8034981	VSVA-B-T32W-AZH-D2-1T1L
		reverse operation,				
		1x normally open, 1x normally closed				
	M	5/2-way valve, single solenoid,	M52-A	52 mm	8034971	VSVA-B-M52-AZH-D2-1T1L
		pneumatic spring return	MEOM	F 2	002/072	VCVA D MEO MEU DO ATAL
	0	5/2-way valve, single solenoid,	M52-M	52 mm	8034972	VSVA-B-M52-MZH-D2-1T1L
		mechanical spring return	250		2221212	VCVA B BEG TH BO 4T41
	ا	5/2-way valve, double solenoid	B52	52 mm	8034969	VSVA-B-B52-ZH-D2-1T1L
	D	5/2-way valve, double solenoid,	D52	52 mm	8034970	VSVA-B-D52-ZH-D2-1T1L
		with dominant signal				
	В	5/3-way solenoid valve,	P53U	52 mm	8034973	VSVA-B-P53U-ZH-D2-1T1L
		mid-position pressurised				
	G	5/3-way solenoid valve,	P53C	52 mm	8034975	VSVA-B-P53C-ZH-D2-1T1L
		mid-position closed				
	E	5/3-way solenoid valve,	P53E	52 mm	8034974	VSVA-B-P53E-ZH-D2-1T1L
		mid-position exhausted				
	VG	5/3-way solenoid valve,	P53F	52 mm	8034983	VSVA-B-P53F-ZH-D2-1T1L
		mid-position pressurised 1 to 2, 4 to 5 closed				

-		Valve function	Valve	Width	Part no.	Туре
COC	de		code			
es						
VC		2x 2/2-way valve, single solenoid,	T22C	52 mm	8034997	VSVA-B-T22C-AZ-D2-1T1L
<b>a</b>		normally closed,				
		pneumatic spring return				
N		2x 3/2-way valve, single solenoid,	T32U	52 mm	8034993	VSVA-B-T32U-AZ-D2-1T1L
		normally open				
√   K		2x 3/2-way valve, single solenoid,	T32C	52 mm	8034991	VSVA-B-T32C-AZ-D2-1T1L
		normally closed				
Н		2x 3/2-way valve, single solenoid,	T32H	52 mm	8034995	VSVA-B-T32H-AZ-D2-1T1L
		1x normally open, 1x normally closed				
P		2x 3/2-way valve, single solenoid,	T32F	52 mm	8034994	VSVA-B-T32F-AZ-D2-1T1L
		reverse operation,				
_		normally open				
Q		2x 3/2-way valve, single solenoid,	T32N	52 mm	8034992	VSVA-B-T32N-AZ-D2-1T1
		reverse operation,				
		normally closed	T2014/	F 2	002/00/	VCVA D TOOM AT DO 4T4
R		2x 3/2-way valve, single solenoid,	T32W	52 mm	8034996	VSVA-B-T32W-AZ-D2-1T1
		reverse operation, 1x normally open, 1x normally closed				
M		5/2-way valve, single solenoid,	M52-A	52 mm	8034986	VSVA-B-M52-AZ-D2-1T1L
I IVI		pneumatic spring return	MID Z-A	52 111111	8034986	V2VA-D-W12Z-AZ-DZ-111L
0		5/2-way valve, single solenoid,	M52-M	52 mm	8034987	VSVA-B-M52-MZ-D2-1T1
0		mechanical spring return	WI32-WI	) J IIIIII	0034707	V3VA-D-INI32-INI2-D2-1111
		5/2-way valve, double solenoid	B52	52 mm	8034984	VSVA-B-B52-Z-D2-1T1L
,		5/2 way valve, adable solellola	532	) JZ 111111	0034704	VSVA D DJE E DE TITE
D		5/2-way valve, double solenoid,	D52	52 mm	8034985	VSVA-B-D52-Z-D2-1T1L
-		with dominant signal			000 1100	
В		5/3-way solenoid valve,	P53U	52 mm	8034988	VSVA-B-P53U-Z-D2-1T1L
		mid-position pressurised				
G		5/3-way solenoid valve,	P53C	52 mm	8034990	VSVA-B-P53C-Z-D2-1T1L
		mid-position closed				
E		5/3-way solenoid valve,	P53E	52 mm	8034989	VSVA-B-P53E-Z-D2-1T1L
		mid-position exhausted				
VG		5/3-way solenoid valve,	P53F	52 mm	8034998	VSVA-B-P53F-Z-D2-1T1L
		mid-position pressurised 1 to 2, 4 to 5 closed				

Ordering data						
	Code	Description		Part no.	Туре	
Right end plate						
600	V	With working air/exhaust air, internal pilot air supply, 1/2 NPT (no port 14)				
	V1	With working air/exhaust air, internal pilot air supply, 3/4 NPT (port 14 is sealed with a blanking plug)	560838	VABE-S6-2R-N34		
600	X	With working air/exhaust air, external pilot air supply, 1/2 NPT	n working air/exhaust air, external pilot air supply, 1/2 NPT			
	X1	With working air/exhaust air, external pilot air supply, 3/4 NPT		560840	VABE-S6-2RZ-N34	
End plate with pilot ai	r selector					
	γ1)	Internal pilot air supply		539239	VABE-S6-1RZ-N-B1	
	U <sup>1)</sup>	Internal pilot air supply, ducted pilot exhaust air				
	Z <sup>1)</sup>	External pilot air supply				
	W <sup>1)</sup>	External pilot air supply, ducted pilot exhaust air				
Manifold sub-base, n	ort pattern	to ISO 15407-2 and ISO 5599-2				
<u> </u>	A	2 valve positions, 4 addresses, for double solenoid valves	18 mm	539223	VABV-S4-2S-N18-2T2	
	В	2 valve positions, 4 addresses, for double solenoid valves	26 mm	539219	VABV-S4-1S-N14-2T2	
	С	1 valve position, 2 addresses, for double solenoid valves	42 mm	542460	VABV-S2-1S-N38-T2	
	D	1 valve position, 2 addresses, for double solenoid valves	52 mm	560843	VABV-S2-2S-N12-T2	
	E	2 valve positions, 2 addresses, for single solenoid valves	18 mm	539225	VABV-S4-2S-N18-2T1	
	F	2 valve positions, 2 addresses, for single solenoid valves	26 mm	539221	VABV-S4-1S-N14-2T1	
	G	1 valve position, 1 address, for single solenoid valves	42 mm	542461	VABV-S2-1S-N38-T1	
	Н	1 valve position, 1 address, for single solenoid valves	52 mm	560844	VABV-S2-2S-N12-T1	
Manifold sub-base V	TCA F anti	sized for flow rate	<u> </u>		•	
Manifold sub-base V		2 valve positions, 4 addresses, for double solenoid valves	10 mm	F4C217	VABV-S4-2HS-N18-2T2	
	В	2 valve positions, 4 addresses, for double solenoid valves  2 valve positions, 4 addresses, for double solenoid valves	18 mm	546217 546213	VABV-54-2H5-N18-2T2	
	С		26 mm			
	D	1 valve position, 2 addresses, for double solenoid valves	42 mm	546221	VABV-S2-1HS-N38-T2	
	E	1 valve position, 2 addresses, for double solenoid valves	52 mm	560843	VABV-S2-2S-N12-T2 VABV-S4-2HS-N18-2T1	
*	F	2 valve positions, 2 addresses, for single solenoid valves	18 mm	546216		
		2 valve positions, 2 addresses, for single solenoid valves	26 mm	546212	VABV-S4-1HS-N14-2T1	
	G	1 valve position, 1 address, for single solenoid valves	42 mm	546220	VABV-S2-1HS-N38-T1	
	Н	1 valve position, 1 address, for single solenoid valves	52 mm	560844	VABV-S2-2S-N12-T1	

<sup>1)</sup> Code letter within the order code for a valve terminal configuration

Orderine data Dueta					
Ordering data – Duct se	Code	Description	Weight [g]	Part no.	Туре
	S	Duct separation 1, 3, 5	57	539228	VABD-S6-1-P3-C
	Т	Duct separation 1	43	539227	VABD-S6-1-P1-C
	R	Duct separation 3, 5	54	539229	VABD-S6-1-P2-C
	L	Seal between sub-bases, duct 1, 3, 5 open, port 14 blocked (colour coding: white)	40	573191	VABD-S6-1-P7-C
	TL	Seal between sub-bases, duct 1 blocked, port 14 blocked (colour coding: red)  Note: additional pilot air supply required	43	8060483	VABD-S6-1-P8-C
	K	Seal between sub-bases, duct 1, 3, 5 blocked, port 14 blocked (colour coding: green)	57	8034612	VABD-S6-1-P6-C
Ordering data					
	Code	Description	Width	Part no.	Туре
Angled connection plate	e P	Outlet at bottom, connecting thread 1/8 NPT	18 mm	539720	VABF-S4-2-A2G2-N18
88	'	Outlet at bottom, connecting thread 1/4 NPT	26 mm	539722	VABF-S4-1-A2G2-N14
		Outlet at bottom, connecting thread 3/8 NPT	42 mm	546098	VABF-S2-1-A1G2-N38
	,	Outlet at bottom, connecting thread 1/2 NPT	52 mm	555703	VABF-S2-2-A1G2-N12
Supply plate					
<b>^</b>	L	With exhaust plate, 3/5 common, 1/2 NPT	-	539233	VABF-S6-1-P1A7-N12
	К	With exhaust air cover, 3/5 separate, 1/2 NPT		539232	VABF-S6-1-P1A6-N12
Vertical supply plate (op	erating pre	essure 0.910 bar)			
99	ZU	Connecting thread 1/8 NPT Individual compressed air supply, duct 1	18 mm	540174	VABF-S4-2-P1A3-N18
		Connecting thread 1/4 NPT Individual compressed air supply, duct 1	26 mm	540172	VABF-S4-1-P1A3-N14
		Connecting thread 3/8 NPT Individual compressed air supply, duct 1	42 mm	546094	VABF-S2-1-P1A3-N38
		Connecting thread 1/2 NPT Individual compressed air supply, duct 1	52 mm	555787	VABF-S2-2-P1A3-N12
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ZV	Connecting thread 1/8 NPT Individual compressed air supply, ducts 1 and 14	18 mm	8000694	VABF-S4-2-P1A14-N18
		Connecting thread 1/4 NPT Individual compressed air supply, ducts 1 and 14	26 mm	8000690	VABF-S4-2-P1A14-N14
		Connecting thread 3/8 NPT Individual compressed air supply, ducts 1 and 14	42 mm	8000540	VABF-S2-1-P1A14-N38
	1	Connecting thread 1/2 NPT	52 mm		VABF-S2-2-P1A14-N12

	Code	Pressure regulation for port	Regulating rang	ge	Width	Part no.	Туре
			[bar]	[MPa]			
egulator plate, widt	h 18 mm						
	ZA	1	0.5 8.5	0.05 0.85	18 mm	540153	VABF-S4-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	18 mm	540151	VABF-S4-2-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	18 mm	540161	VABF-S4-2-R2C2-C-10
	ZH	2	2 6	0.2 0.6	18 mm	540159	VABF-S4-2-R2C2-C-6
i De	ZB ZB	4	2 8.5	0.2 0.85	18 mm	540157	VABF-S4-2-R3C2-C-10
*	√D <b>PP</b> ZG	4	2 6	0.20.6	18 mm	540155	VABF-S4-2-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	18 mm	540165	VABF-S4-2-R4C2-C-10
	ZI	2 and 4	2 6	0.2 0.6	18 mm	540163	VABF-S4-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	18 mm	540169	VABF-S4-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	18 mm	540167	VABF-S4-2-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	18 mm	546252	VABF-S4-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	18 mm	546248	VABF-S4-2-R6C2-C-6
	ZK	4, reversible	0.5 8.5	0.05 0.85	18 mm	546254	VABF-S4-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	18 mm	546250	VABF-S4-2-R7C2-C-6
egulator plate, widt	h 26 mm						
	ZA	1	0.5 8.5	0.05 0.85	26 mm	540154	VABF-S4-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	26 mm	540152	VABF-S4-1-R1C2-C-6
	ZC	2	2 8.5	0.2 0.85	26 mm	540162	VABF-S4-1-R2C2-C-10
	ZH	2	2 6	0.20.6	26 mm	540160	VABF-S4-1-R2C2-C-6
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	ZB ZB	4	2 8.5	0.2 0.85	26 mm	540158	VABF-S4-1-R3C2-C-10
	√D ZG	4	2 6	0.20.6	26 mm	540156	VABF-S4-1-R3C2-C-6
	ZD	2 and 4	2 8.5	0.2 0.85	26 mm	540166	VABF-S4-1-R4C2-C-10
	ZI	2 and 4	2 6	0.20.6	26 mm	540164	VABF-S4-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 8.5	0.05 0.85	26 mm	540170	VABF-S4-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	26 mm	540168	VABF-S4-1-R5C2-C-6
	ZL	2, reversible	0.5 8.5	0.05 0.85	26 mm	546251	VABF-S4-1-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	26 mm	546247	VABF-S4-1-R6C2-C-6
	ZK	4, reversible	0.5 8.5	0.05 0.85	26 mm	546253	VABF-S4-1-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	26 mm	546249	VABF-S4-1-R7C2-C-6

	Code	Pressure regulation for port	Regulating rang	e	Width	Part no.	Type
			[bar]	[MPa]			
egulator plate, width	42 mm						
.0	ZA	1	0.5 8.5	0.05 0.85	42 mm	546084	VABF-S2-1-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	42 mm	546083	VABF-S2-1-R1C2-C-6
	ZC	2	1.0 10	0.1 1	42 mm	546088	VABF-S2-1-R2C2-C-10
	ZH	2	1.0 6	0.1 0.6	42 mm	546087	VABF-S2-1-R2C2-C-6
	ZB	4	1.0 10	0.1 1	42 mm	546086	VABF-S2-1-R3C2-C-10
<b>43</b> 0	ZG	4	0.5 6	0.05 0.6	42 mm	546085	VABF-S2-1-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	42 mm	546090	VABF-S2-1-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	42 mm	546089	VABF-S2-1-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	42 mm	546092	VABF-S2-1-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	42 mm	546091	VABF-S2-1-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	42 mm	546832	VABF-S2-1-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	42 mm	546831	VABF-S2-1-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	42 mm	546834	VABF-S2-1-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	42 mm	546833	VABF-S2-1-R7C2-C-6
gulator plate, width	52 mm						
0	ZA	1	0.5 10	0.05 1	52 mm	555772	VABF-S2-2-R1C2-C-10
	ZF	1	0.5 6	0.05 0.6	52 mm	555771	VABF-S2-2-R1C2-C-6
	ZC	2	1.0 10	0.1 1	52 mm	555774	VABF-S2-2-R2C2-C-10
	ZH	2	1.0 6	0.1 0.6	52 mm	555773	VABF-S2-2-R2C2-C-6
	ZB	4	1.0 10	0.1 1	52 mm	555776	VABF-S2-2-R3C2-C-10
71	ZG	4	1.0 6	0.1 0.6	52 mm	555775	VABF-S2-2-R3C2-C-6
	ZD	2 and 4	1.0 10	0.1 1	52 mm	555778	VABF-S2-2-R4C2-C-10
	ZI	2 and 4	1.0 6	0.1 0.6	52 mm	555777	VABF-S2-2-R4C2-C-6
	ZE	2 and 4, reversible	0.5 10	0.05 1	52 mm	555780	VABF-S2-2-R5C2-C-10
	ZJ	2 and 4, reversible	0.5 6	0.05 0.6	52 mm	555779	VABF-S2-2-R5C2-C-6
	ZL	2, reversible	0.5 10	0.05 1	52 mm	555782	VABF-S2-2-R6C2-C-10
	ZN	2, reversible	0.5 6	0.05 0.6	52 mm	555781	VABF-S2-2-R6C2-C-6
	ZK	4, reversible	0.5 10	0.05 1	52 mm	555784	VABF-S2-2-R7C2-C-10
	ZM	4, reversible	0.5 6	0.05 0.6	52 mm	555783	VABF-S2-2-R7C2-C-6

	Code	Pressure regulation for port	Regulating ran	ge	Width	Part no.	Туре
	Code	Tressure regulation for port	[bar]	[MPa]	Width	T dit iio.	Type
ogulator plato forva	alvoc with a cu	mmetrical coil layout, width 18 mm	[20.]	[ %]			
0 1	ZAY		0.5 8.5	0.05 0.85	18 mm	560756	VABF-S4-2-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	18 mm	560758	VABF-S4-2-R1C2-C-6E
	ZCY	2	2 8.5	0.2 0.85	18 mm	560763	VABF-S4-2-R2C2-C-10E
	ZHY	2	2 6	0.2 0.6	18 mm	560765	VABF-S4-2-R2C2-C-6E
200	ZDY	2 and 4	2 8.5	0.2 0.85	18 mm	560767	VABF-S4-2-R4C2-C-10E
	ZIY	2 and 4	2 6	0.2 0.6	18 mm	560769	VABF-S4-2-R4C2-C-10L
	ZEY	2 and 4, reversible	0.5 8.5	0.05 0.85	18 mm	560771	VABF-S4-2-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	18 mm	560773	VABF-S4-2-R5C2-C-16E
	ZLY	2, reversible	0.5 8.5	0.05 0.85	18 mm	560775	VABF-S4-2-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	18 mm	560777	VABF-S4-2-R6C2-C-16E
		1 '	0.5 0	0.03 0.0	10 111111	300777	VADI-34-2-ROCZ-C-OL
gulator plate for va	alves with a sy	mmetrical coil layout, width 26 mm					
	ZAY	1	0.5 8.5	0.05 0.85	26 mm	560757	VABF-S4-1-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	26 mm	549876	VABF-S4-1-R1C2-C-6E
	ZCY	2	2 8.5	0.2 0.85	26 mm	560764	VABF-S4-1-R2C2-C-10E
	ZHY	2	2 6	0.2 0.6	26 mm	560766	VABF-S4-1-R2C2-C-6E
	ZDY	2 and 4	2 8.5	0.2 0.85	26 mm	560768	VABF-S4-1-R4C2-C-10E
	ZIY	2 and 4	2 6	0.2 0.6	26 mm	560770	VABF-S4-1-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 8.5	0.05 0.85	26 mm	560772	VABF-S4-1-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	26 mm	560774	VABF-S4-1-R5C2-C-6E
	ZLY	2, reversible	0.5 8.5	0.05 0.85	26 mm	560776	VABF-S4-1-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	26 mm	560778	VABF-S4-1-R6C2-C-6E
			1				
guiator piate for va		mmetrical coil layout, width 42 mm <sup>1</sup>		0.05 1	1/2		VADE 52 4 D452 5 405
	ZAY	1	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R1C2-C-10E
	ZFY	1	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R1C2-C-6E
	ZCY	2	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R2C2-C-10E
	ZHY	2	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R2C2-C-6E
	ZBY	4	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R3C2-C-10E
	ZGY	4	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R3C2-C-6E
	ZDY	2 and 4	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R4C2-C-10E
	ZIY	2 and 4	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R5C2-C-6E
	ZLY	2, reversible	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R6C2-C-6E
	ZKY	4, reversible	0.5 10	0.05 1	42 mm	-	VABF-S2-1-R7C2-C-10E
	ZMY	4, reversible	0.5 6	0.05 0.6	42 mm	-	VABF-S2-1-R7C2-C-6E
ulator plate for va	alves with a sv	mmetrical coil layout, width 52 mm <sup>1</sup>	)				
C Plate for Va	ZAY	1	0.5 10	0.05 1	52 mm	_	VABF-S2-2-R1C2-C-10E
Ĭ	ZFY	1	0.5 6	0.05 0.6	52 mm	_	VABF-S2-2-R1C2-C-6E
	ZCY	2	0.5 10	0.05 1	52 mm	_	VABF-S2-2-R2C2-C-10E
	ZHY	2	0.5 6	0.05 0.6	52 mm	_	VABF-S2-2-R2C2-C-6E
	ZBY	4	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R3C2-C-10E
**	ZGY	4	0.5 6	0.05 1	52 mm	_	VABF-S2-2-R3C2-C-10E
	ZDY			0.05 0.6	_	_	
		2 and 4	0.5 10		52 mm	-	VABF-S2-2-R4C2-C-10E
	ZIY	2 and 4	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R4C2-C-6E
	ZEY	2 and 4, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R5C2-C-10E
	ZJY	2 and 4, reversible	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R5C2-C-6E
	ZLY	2, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R6C2-C-10E
	ZNY	2, reversible	0.5 6	0.05 0.6	52 mm	-	VABF-S2-2-R6C2-C-6E
	ZKY	4, reversible	0.5 10	0.05 1	52 mm	-	VABF-S2-2-R7C2-C-10E
	ZMY	4, reversible	0.5 6	0.05 0.6	52 mm		VABF-S2-2-R7C2-C-6E

<sup>1)</sup> These functions are only available via the pressure regulator configurator VABF-S2 for width 42 mm and 52 mm only (ISO 5599-2, ISO 1 and ISO 2)

	Code	Description		Width	Part no.	Туре
essure gauge						
	T	With cartridge connection for	scale in bar/psi,	18 mm	543487	PAGN-26-16-P10
( (60))		regulator, 10 bar,	display range 016 bar/0240 psi,	26 mm		
			for regulator plate code ZA, ZB, ZC,	42 mm	548010	PAGN-40-16-P10
			ZD, ZE, ZK, ZL	52 mm		
	U	With cartridge connection for	scale in bar/psi,	18 mm	543488	PAGN-26-10-P10
		regulator, 6 bar,	display range 010 bar/0145 psi, for regulator plate code ZF, ZG, ZH,	26 mm		
				42 mm	548009	PAGN-40-10-P10
			ZI, ZJ, ZM, ZN	52 mm		
	WT	With cartridge connection for	Scale in MPa,	18 mm	563735	PAGN-26-1.6M-P10
		regulator, 10 bar	display range 016 bar/01.6 MPa,	26 mm		
			for regulator plate code ZA, ZB, ZC,	42 mm	563737	PAGN-40-1.6M-P10
			ZD, ZE, ZK, ZL	52 mm		
	WU	WU With cartridge connection for regulator, 6 bar	Scale in MPa, display range 016 bar/01 MPa	18 mm	563736	PAGN-26-1M-P10
				26 mm		
			for regulator plate code ZF, ZG, ZH,	42 mm	563738	PAGN-40-1M-P10
			ZI, ZJ, ZM, ZN	52 mm		
	VT	With cartridge connection for	Scale in psi/bar,	18 mm	563731	PAGN-26-232P-P10
		regulator, 10 bar	display range 016 bar/0232 psi	26 mm		
			for regulator plate code ZA, ZB, ZC,	42 mm	563733	PAGN-40-232P-P10
			ZD, ZE, ZK, ZL	52 mm		
	PS	With cartridge connection for	Scale in psi/bar,	18 mm	563732	PAGN-26-145P-P10
		regulator, 6 bar	display range 010 bar/0145 psi	26 mm		
			for regulator plate code ZF, ZG, ZH,	42 mm	563734	PAGN-40-145P-P10
			ZI, ZJ, ZM, ZN	52 mm		

	Code	Description		Part no.	Туре
artridge for regulato	r plate		·		
	-	For tubing O.D. 4 mm	1 piece	172972	QSP10-4
	-	Adapter for pressure gauge (allows products with threaded connection G1/8 to be attached to the cartridge connection)	Pack of 6	565811	QSP10-G1/8
rottle plate					
rottle plate	X	Restricts the flow of exhaust air downstream of the valve to ducts 3 and 5	18 mm	540176	VABF-S4-2-F1B1-C
	^	Restricts the new of exhaust all downstream of the valve to ducts 5 and 5	26 mm	540175	VABF-S4-1-F1B1-C
			42 mm	546095	VABF-S2-1-F1B1-C
THE STATE OF THE S	Design		52 mm	555789	VABF-S2-2-F1B1-C
rtical pressure shut					
	ZT	3/2-way valve for shutting off the operating pressure at the valve position	18 mm	542884	VABF-S4-2-L1D1-C
		Pressure separation can be shut off on the valve assembly	26 mm	542885	VABF-S4-1-L1D1-C
			42 mm 52 mm	546096 555791	VABF-S2-1-L1D1-C VABF-S2-2-L1D1-C
	ZS	3/2-way valve for shutting off the operating pressure at the valve position	18 mm	8001178	VABF-S4-2-L1D2-C
	,	Pressure separation can be shut off on the valve assembly using a key	26 mm	8001179	VABF-S4-1-L1D2-C
vering					
$\searrow$	L	Blanking plate for vacant position	18 mm	539213	VABB-S4-2-WT
R			26 mm	539212	VABB-S4-1-WT
			42 mm	543186	VABB-S2-1-WT
•			52 mm	560845	VABB-S2-2-WT
	N	Cover cap for manual override, non-detenting	Pack of 10	541010	VAMC-S6-CH
	V	Cover cap for manual override, concealed	Pack of 10	541011	VAMC-S6-CS
	A	Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only)	Pack of 10	4105147	VAMC-B-S6-CTR
9	-	Sealing cap for electrical links (with individual connection), size 18 mm and 26 mm	Pack of 10	547713	VABD-S4-E-C
	-	Seal (with individual connection), width 42 mm and 52 mm	Pack of 2	571343	VABD-S2-1-S-C
cessories for manu	al override h	eaw duty			
The state of the s	-	Coded key (accessory) for actuating the cover cap, heavy duty, for detenting position (VAMC-B-S6-CTR)	1 piece	1662543	АНВ-МЕВ-В



There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.

## Accessories – Electrical components

Ordering data	Code	Description		Part no.	Туре
		Description		Tartilo.	Турс
Multi-pin node for VTS	SA/VISA-F	Torminal strip 26 nin	<u> </u>	542412	VARE SCALE C MA COOM
	MP1	Terminal strip, 36-pin	🗒 - Note	543412	VABE-S6-1LF-C-M1-C36M
		Sub-D plug, 37-pin	Multi-pin node supplied without cover.	543414	VABE-S6-1LT-C-M1-S37
	MP4	Round plug, 19-pin		543415	VABE-S6-1LF-C-M1-R19
			Please order appropriate cover with		
			cable separately.		
ndividual electrical c	onnection for	·VTSA/VTSA-F			
	-MP2	Multi-pin node with indiv	idual connection M12, 6-way	549046	VABE-S6-LT-C-S6-R5
	-MP3	Multi-pin node with indiv	idual connection M12, 10-way	549047	VABE-S6-LT-C-S10-R5
	-	Cover for individual conn	ection M12, 6-way	549048	VAEM-S6-C-S6-R5
		Cover for individual conn	ection M12, 10-way	549049	VAEM-S6-C-S10-R5
Pneumatic interface fo	or VTSA/VTSA				
	_	For electrical terminal CP.	K in polymer	543416	VABA-S6-1-X1
	-	For electrical terminal CP	K in metal	550663	VABA-S6-1-X2
	-	For electrical terminal CP with changed diagnostic		573613	VABA-S6-1-X2-D
Electrical interface IO	-Link®				
		IO-Link <sup>®</sup> interface for 16	valve positions	8152353	VABA-S6-1-PT
Electrical interface for	AS-Interface				
	-	4 inputs/4 outputs		549042	VABE-S6-1LF-C-A4-E
	_	8 inputs/8 outputs		549043	VABE-S6-1LF-C-A8-E
AS-Interface module f	for VTSA/VTSA				1
	-	4 inputs/4 outputs		549044	VAEM-S6-S-FAS-4-4E
	-	8 inputs/8 outputs		549045	VAEM-S6-S-FAS-8-8E


## Accessories – Electrical components

	Code	Description		Part no.	Туре
Nanifold block for AS-		vec per	· ·		71.
Mainiola block 101715	Х	4x M12, 5-pin, double, socket	195704	CPX-AB-4-M12x2-5POL	
	GW	4x M12, 5-pin, socket, metal thread		541254	CPX-AB-4-M12x2-5POL-R
	R	8x M8, 3-pin, socket		195706	CPX-AB-8-M8-3POL
	J	8x spring-loaded terminal, Cage Clamp, 4-pin		195708	CPX-AB-8-KL-4POL
	В	Sub-D, 25-pin, socket		525676	CPX-AB-1-SUB-BU-25POL
Connecting cable, Sub	-D (TPF-U(PI	IR) IP65)			
•	GA	Connecting cable for max. 8 solenoid coils, 10-core	2.5 m	539240	NEBV-S1W37-E-2.5-LE10
	GB	7	5 m	539241	NEBV-S1W37-E-5-LE10
	GC		10 m	539242	NEBV-S1W37-E-10-LE10
	GD	Connecting cable for max. 22 solenoid coils, 26-core	2.5 m	539243	NEBV-S1W37-E-2.5-LE26
	GE		5 m	539244	NEBV-S1W37-E-5-LE26
	GF		10 m	539245	NEBV-S1W37-E-10-LE26
	GG	Connecting cable for max. 32 solenoid coils, 37-core	2.5 m	539246	NEBV-S1W37-K-2.5-LE37
	GH		5 m	539247	NEBV-S1W37-K-5-LE37
	GI		10 m	539248	NEBV-S1W37-K-10-LE37
Connecting cable, Sub	-D (PVC_IP6	5)			
•	GK	Connecting cable for max. 8 solenoid coils, 10-core	2.5 m	543271	NEBV-S1W37-KM-2.5-LE10
	GL		5 m	543272	NEBV-S1W37-KM-5-LE10
	GM	7	10 m	543273	NEBV-S1W37-KM-10-LE10
	GN	Connecting cable for max. 23 solenoid coils, 27-core	2.5 m	543274	NEBV-S1W37-KM-2.5-LE27
* `	GO		5 m	543275	NEBV-S1W37-KM-5-LE27
	GP		10 m	543276	NEBV-S1W37-KM-10-LE27
	GQ	Connecting cable for max. 32 solenoid coils, 37-core	2.5 m	543277	NEBV-S1W37-KM-2.5-LE37
	GR		5 m	543278	NEBV-S1W37-KM-5-LE37
	GS		10 m	543279	NEBV-S1W37-KM-10-LE37
Cover for multi-pin plu	σ				
Sover for maker pint plu	- -	For configuration by the user		545974	NECV-S1W37
~					


#### Accessories – General

	Code	Description		Part no.	Туре
scription label hold	ers/inscripti	on labels		:	
	В	Clip-on inscription label holder for valve cap	Pack of 5	540888	ASCF-T-S6
<u>*</u>	Т	Inscription label holder for manifold blocks	Pack of 5	540889	ASCF-M-S6
	TD	Inscription label holder for manifold blocks, size 52 mm	Pack of 5	562577	ASCF-M-S2-2
	-	Inscription label for ISO 15407 valves with individual electrical connection (20 labels in frames)	20 pieces	18182	IBS-9x20
	- Inscription label for pressure zone separation • 4 inscription labels, duct 1/3/5 blocked • 4 inscription labels, duct 1 blocked • 4 inscription labels, duct 3/5 blocked				ASLR-L-S6-2016
OIN rail mounting					
	- >	VTSA/VTSA-F	Pack of 3	526032	CPX-CPA-BG-NRH
Vall mounting					
	-	Mounting bracket with a mounting hole for M5 screw	Pack of 5	539214	VAME-S6-10-W
	U	Mounting bracket with a mounting hole for M4 screw and a mounting hole for M6 screw	Pack of 1	567038	VAME-S6-W-M46
	AW	Mounting bracket for length compensation on the CPX side when mounting using support system Set comprising 1 angle bracket and 2 screws	1 piece	2721419	CPX-M-BG-VT-2X
Jser documentation					
	D	User documentation for valve terminal VTSA/VTSA-F	German	538922	VTSA/VTSA-F-DE
	E		English	538923	VTSA/VTSA-F-EN
Pneumatic connection	accessories	5			
		anking plugs, silencers and other pneumatic accessories can be found in the c	hapter "Accessori	es" → page 189	

Valves with code SO, SQ, SS, width 18 mm




Valves with code SO, SQ, SS, width 26 mm




Flow rate up to 1100 l/min

Valve width 18 mm 26 mm

Voltage 24 V DC



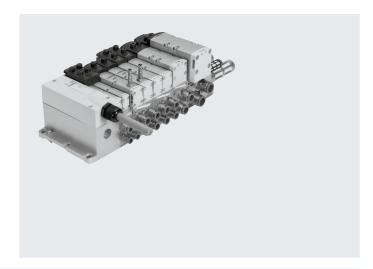

#### ISO valves with switching position sensing for safety-related pneumatic components Function

The 5/2-way single solenoid valve with spring return in width 18 mm and 26 mm features valve diagnostics. It is available as a valve with plug-in or individual connection with pilot valves to ISO 15218 and square plug type C.

The normal position of the piston spool is monitored by the inductive

This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the valve must be evaluated by the control system.

This valve is suitable for use in safetyrelated parts of control systems to EN ISO 13849-1.

The control block has been developed and manufactured in accordance with the basic and proven safety principles of EN ISO 13849-2.

This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

Decentralised individual connection variant

Valve on individual sub-base (square plug or plug-in) with integrated switching position sensing.

The electrical connection is established via either a standardised 4-pin M12 plug 24 V DC (ISO 15407-2), a 4-pin spring-loaded terminal or a cable (open end) 24 V DC, which can be configured by the user.

The individual sub-base can be supplied with internal or external pilot air

depending on the version.

Variant for valve terminal VTSA/VTSA-F



The valves with integrated switching position sensing in plug-in design for valve terminal VTSA/VTSA-F can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

Pilot air supply:

The valve terminal can be supplied with internal or external pilot air via the various end plate variants.

Note

Valves in plug-in design are always supplied with pilot air via duct 14 in the manifold sub-base.

The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. The switching element function of the sensors used here is designed as an N/C contact.

#### Note

Pilot exhaust air port 12 is exhausted directly at the valve, without a connection. If the customer requests a "turned seal", exhaust air is vented at the end plates of the valve terminal, which doesn't conform to the ISO standard.

Safety data	
Conforms to standard	EN 13849-1/2
CE marking (see declaration of conformity)	To EU EMC Directive <sup>1)</sup>
Shock resistance	Shock test with severity level 2, to EN 60068-2-27
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Safety characteristics					
Valve function 5/2-way, single solenoid	y, single solenoid Test pulses				
	Max. positive test pulse with logic 0 [μs]	Max. negative test pulse with logic 1 [μs]			
VSVA-B-M52-MZA1-1T1L	1200	1100			
VSVA-B-M52-MZA2-1T1L	1500	800			
VSVA-B-M52-MZ-A1-1C1	1800	800			

General technical data					
Valve	VSVA-B-M52-MZD-A2-1T1L	VSVA-B-M52-MZD-A1-1T1L	VSVA-B-M52-MZ-A1-1C1		
Width	18 mm	26 mm	26 mm		
Conforms to	ISO 15407-2		ISO 15407-1		
Design	Piston spool valve				
Sealing principle	Soft				
Overlap	Positive overlap				
Actuation type	Electrical	Electrical			
Type of control	Piloted				
Exhaust function, can be throttled	Via individual sub-base, via throttle pl	ate			
Lubrication	Lifetime lubrication				
Type of mounting	Via through-hole, on manifold sub-bas	se			
Mounting position	Any				
Manual override	Concealed				
Individual sub-base			→ Page 180		
Valve terminal			→ Page 73		

Standard nominal flow rate [l/min]								
Valve function	Flow	Flow						
	Valve	Valve on valve terminal VTSA	Valve on valve terminal VTSA-F	Valve on individual sub-base				
VSVA-B-M52-MZ-A1-1C1-ANC	1400	1100	-	1100				
VSVA-B-M52-MZ-A1-1C1-ANP	1400	1100	-	1100				
VSVA-B-M52-MZ-A1-1C1-APC	1400	1100	-	1100				
VSVA-B-M52-MZ-A1-1C1-APP	1400	1100	-	1100				
VSVA-B-M52-MZD-A1-1T1L-ANC	1400	1100	1350	1200				
VSVA-B-M52-MZD-A1-1T1L-ANP	1400	1100	1350	1200				
VSVA-B-M52-MZD-A1-1T1L-APC	1400	1100	1350	1200				
VSVA-B-M52-MZD-A1-1T1L-APP	1400	1100	1350	1200				
VSVA-B-M52-MZD-A1-1T1L-APX-0.5	1400	1100	1350	1200				
VSVA-B-M52-MZD-A2-1T1L-ANP	750	550	700	600				
VSVA-B-M52-MZD-A2-1T1L-APP	750	550	700	600				
VSVA-B-M52-MZD-A2-1T1L-APX-0.5	750	550	700	600				

Valve switching times [ms]				
Valve		VSVA-B-M52-MZD-A2-1T1L	VSVA-B-M52-MZD-A1-1T1L	VSVA-B-M52-MZ-A1-1C1
Width		18 mm	26 mm	26 mm
Valve switching times	On	12	20	21
	Off	38	54	41
Sensor switching times	On	32	60	60
	Off	9	11	11

Electrical data for valve					
Valve		VSVA-B-M52-MZD-A2-1T1L	VSVA-B-M52-MZD-A1-1T1L	VSVA-B-M52-MZ-A1-1C1	
Width		18 mm	26 mm	26 mm	
Electrical connection		4-pin plug to ISO 15407-2		Plug to EN 175301-803, type C, without PE conductor	
Nominal operating voltage	[V DC]	24			
Permissible voltage fluctuations	[%]	±10		-15/+10	
Surge resistance	[kV]	2.5			
Pollution degree		3			
Power consumption	[W]	1.6		1.8	
Switching position sensing	Switching position sensing		Normal position via sensor		
Duty cycle [%]		100			
Degree of protection to EN 60529		IP65, NEMA 4 (for all types of signal transmission when mounted)			
Signal status indication		LED Via accessories		Via accessories	

Electrical data for sensor		
Electrical connection		Cable, 3-core
		Plug M8x1, 3-pin
Cable length	[m]	2.5
Switching output		PNP or NPN
Switching element function		N/C
Switching status indication		Yellow LED
Operating voltage range	[V DC]	10 30
Residual ripple	[%]	±10
No-load current for sensor	[mA]	š10
Max. output current	[mA]	200
Voltage drop	[V]	š2
Max. switching frequency	[Hz]	5000
Short circuit current rating		Pulsed
Reverse polarity protection for sensor		For all electrical connections
Measuring principle		Inductive
Switching position sensing		Valve normal position via sensor


Operating and environmental cond	itions			
Valve		VSVA-B-M521T1L	VSVA-B-M521C1	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]		
Notes on operating/pilot medium		Lubricated operation possible (in which case lubricated operation wi	ll always be required)	
Operating pressure	[bar]	-0.9 10	-0.9 16	
	[MPa]	-0.09 1	-0.09 1.6	
Operating pressure for valve termi-	[bar]	3 10		
nal with internal pilot air supply	[MPa]	0.3 1		
Pilot pressure	[bar]	310		
	[MPa]	0.3 1		
Ambient temperature	[°C]	-5 +50		
Temperature of medium	[°C]	-5 +50		
Note on materials		RoHS-compliant		
Noise level LpA	[dB(A)]	85		
CE marking (see declaration of		To EU EMC Directive¹)		
conformity)				
UKCA marking (see declaration of		To UK EMC regulations <sup>1)</sup>		
conformity)				
KC marking		KC EMC		
Certification		C-Tick	C-Tick	
		c UL us - Recognized (OL)	-	


<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... -> Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Materials	
Sub-base/manifold sub-base	Die-cast aluminium
Valve	Die-cast aluminium, PA
Seals	FPM, NBR
Screws	Galvanised steel
Sensor housing	High-alloy stainless steel
Sensor cable sheath	TPE-U(PUR)

Product weight						
Width	18 mm	26 mm				
5/2-way solenoid valve type						
VSVA-B-M52-MZD-A2-1T1L-APX-0.5	157 g	-				
VSVA-B-M52-MZD-A2-1T1L-APP	140 g	-				
VSVA-B-M52-MZD-A2-1T1L-ANP	140 g	-				
VSVA-B-M52-MZD-A1-1T1L-APC	-	307 g				
VSVA-B-M52-MZD-A1-1T1L-APP	-	264 g				
VSVA-B-M52-MZ-A1-1C1-APC	-	332 g				
VSVA-B-M52-MZ-A1-1C1-APP	-	289 g				
VSVA-B-M52-MZD-A1-1T1L-ANC	-	307 g				
VSVA-B-M52-MZD-A1-1T1L-ANP	-	264 g				
VSVA-B-M52-MZ-A1-1C1-ANC	-	332 g				
VSVA-B-M52-MZ-A1-1C1-ANP	-	289 g				
VSVA-B-M52-MZD-A1-1T1L-APX-0.5	-	281 g				
Individual connection						
Individual sub-base	192	302 g				

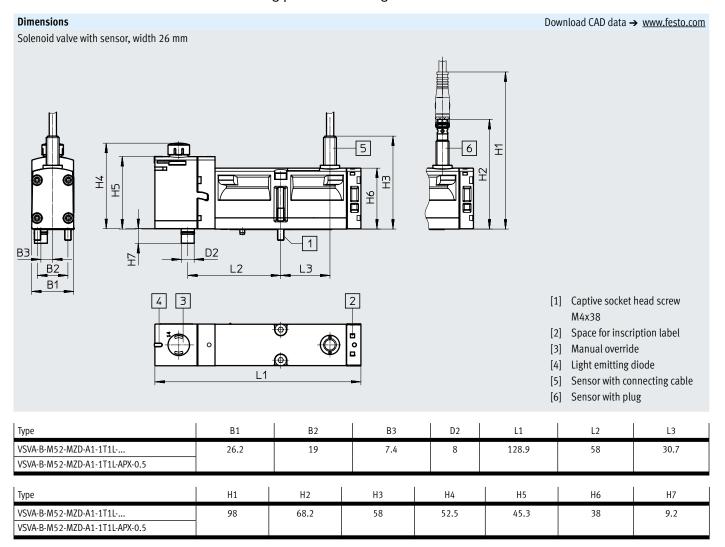

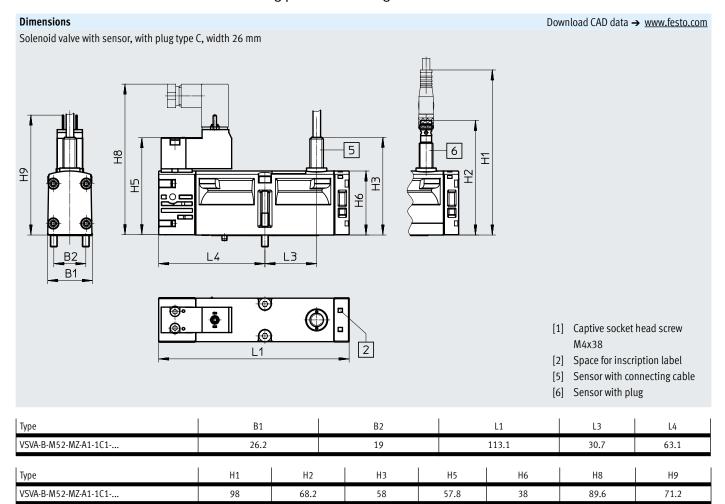

## Ordering data – Solenoid valve with switching position sensing

Ordering data – Solenoid valve VSVA, manual override non-detenting/detenting (D)						
	Code	Valve function	Width	Part no.	Туре	
5/2-way solenoid valve, 24 V DC, plug-in design for valve terminal VTSA/VTSA-F with proximity switch						
	_	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	560723	VSVA-B-M52-MZD-A1-1T1L-APC	
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	560742	VSVA-B-M52-MZD-A1-1T1L-ANC	
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	18 mm	573201	VSVA-B-M52-MZD-A2-1T1L-APX-0.5	
			26 mm	570850	VSVA-B-M52-MZD-A1-1T1L-APX-0.5	
	S0	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	18 mm	573202	VSVA-B-M52-MZD-A2-1T1L-APP	
			26 mm	560724	VSVA-B-M52-MZD-A1-1T1L-APP	
	SQ	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	573203	VSVA-B-M52-MZD-A2-1T1L-ANP	
		sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	560743	VSVA-B-M52-MZD-A1-1T1L-ANP	

	Code	Valve function	Width	Part no.	Туре
2-way solenoid valve	e, 24 V DC, p	olug-in design for valve terminal VTSA/VTSA-F with proximity switch			
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033026	VSVA-B-M52-MZTR-A1-1T1L-APC
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033030	VSVA-B-M52-MZTR-A1-1T1L-ANC
	SS	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	18 mm	8033459	VSVA-B-M52-MZTR-A2-1T1L-APX-0.5
			26 mm	8033034	VSVA-B-M52-MZTR-A1-1T1L-APX-0.5
	S0	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1	18 mm	8033460	VSVA-B-M52-MZTR-A2-1T1L-APP
	1		26 mm	8033027	VSVA-B-M52-MZTR-A1-1T1L-APP
	SQ	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033461	VSVA-B-M52-MZTR-A2-1T1L-ANP
		sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033031	VSVA-B-M52-MZTR-A1-1T1L-ANP

# Ordering data – Solenoid valve with switching position sensing

	Code	Valve function	Width	Part no.	Туре
5/2-way solenoid valve	, 24 V DC, p	lug-in design for valve terminal VTSA/VTSA-F with proximity switch			
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033049	VSVA-B-M52-MZH-A1-1T1L-APC
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033053	VSVA-B-M52-MZH-A1-1T1L-ANC
18 L	SS	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033477	VSVA-B-M52-MZH-A2-1T1L-APX-0.5
		sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	8033057	VSVA-B-M52-MZH-A1-1T1L-APX-0.5
	S0	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033478	VSVA-B-M52-MZH-A2-1T1L-APP
		sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	8033050	VSVA-B-M52-MZH-A1-1T1L-APP
	SQ	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033479	VSVA-B-M52-MZH-A2-1T1L-ANP
		sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033054	VSVA-B-M52-MZH-A1-1T1L-ANP

	Code	Valve function	Width	Part no.	Туре
/2-way solenoid valve,	24 V DC, p	lug-in design for valve terminal VTSA/VTSA-F with proximity switch			
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m	26 mm	8033072	VSVA-B-M52-MZ-A1-1T1L-APC
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m	26 mm	8033076	VSVA-B-M52-MZ-A1-1T1L-ANC
<del></del>	SS	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033495	VSVA-B-M52-MZ-A2-1T1L-APX-0.5
		sensor with PNP output with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1	26 mm	8033080	VSVA-B-M52-MZ-A1-1T1L-APX-0.5
	S0	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033496	VSVA-B-M52-MZ-A2-1T1L-APP
		sensor with PNP output and 3-pin sensor push-in connector M8x1	26 mm	8033073	VSVA-B-M52-MZ-A1-1T1L-APP
	SQ	5/2-way valve, single solenoid, mechanical spring return, inductive	18 mm	8033497	VSVA-B-M52-MZ-A2-1T1L-ANP
		sensor with NPN output and 3-pin sensor push-in connector M8x1	26 mm	8033077	VSVA-B-M52-MZ-A1-1T1L-ANP

#### Valve terminal VTSA/VTSA-F, NPT

# Ordering data – Solenoid valve with switching position sensing

Ordering data					
	Code	Valve function	Width	Part no.	Туре
Solenoid valves, 24 V DC	, with pneu	matic interface to ISO 15218 for individual sub-base			
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and cable, 3-core, 2.5 m, electrical connection to EN 175301-803, type C	26 mm	560725	VSVA-B-M52-MZ-A1-1C1-APC
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and cable, 3-core, 2.5 m, electrical connection to EN 175301-803, type C	26 mm	560744	VSVA-B-M52-MZ-A1-1C1-ANC
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with PNP output and 3-pin sensor push-in connector M8x1, electrical connection to EN 175301-803, type C	26 mm	560726	VSVA-B-M52-MZ-A1-1C1-APP
	-	5/2-way valve, single solenoid, mechanical spring return, inductive sensor with NPN output and 3-pin sensor push-in connector M8x1, electrical connection to EN 175301-803, type C	26 mm	560745	VSVA-B-M52-MZ-A1-1C1-ANP



#### Note

- The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Return the module to Festo for repair in the event of a fault.
- Valves with switching position sensing from the VSVA-B-M52-... series can only be ordered
  individually. If these are used on a valve terminal, appropriate vacant positions must be
  provided for them. Exceptions are the valves with ident. code SS, SO and SQ.

# Accessories – Solenoid valve with switching position sensing

	Code	Description		Part no.	Туре
ndividual sub-base		to ISO 15407-2, electrical connection via cable terminals	:		
A Sub-base,	– port patteri	Threaded connection, internal pilot air supply, lateral connections	18 mm	541068	VABS-S4-2S-N18-B-K2
		inteduce connection, memar phot an supply, lateral connections	26 mm	541066	VABS-S4-1S-N14-B-K2
10 900	,	Threaded connection, external pilot air supply, lateral connections	18 mm	539724	VABS-S4-2S-N18-K2
		inicaded connection, external pilot an supply, lateral connections	26 mm	539726	VABS-S4-2S-N16-K2
			20 111111	333720	VAD3-34-13-N14-N2
Plug socket for the e	lectrical con	nection of individual valves, type C			
	-	Angled socket, type C, 3-pin		151687	MSSD-EB
		Straight plug, PG7			
		• 230 V AC			
$\downarrow \downarrow$		Angled socket, type C, 3-pin		539712	MSSD-EB-M12
		Straight plug, M12x1			
lluminating seal for	plug patterr	to EN 175301-803, type C		Datasheets → I	nternet: meb-ld
	-	For plug socket MSSD, 12 24 V DC	151717	MEB-LD-12-24DC	
Connecting cable for	electrical co	nnection of individual valves, type C			
	GG	Angled socket, type C, 3-pin, with LED	2.5 m	151688	KMEB-1-24-2.5-LED
	GH	Open end, 3-core	5 m	151689	KMEB-1-24-5-LED
	GJ	• 24 V DC, PVC	10 m	193457	KMEB-1-24-10-LED
.   ]					
$\checkmark$					
				•	•
© Connecting cable for	the electrica	al connection of sensors for switching position sensing			
	the electric	al connection of sensors for switching position sensing  • Straight socket, M8x1, 3-pin	2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3
			2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3
		Straight socket, M8x1, 3-pin	2.5 m	8078223 8078224	NEBA-M8G3-U-2.5-N-LE3 NEBA-M8G3-U-5-N-LE3
	GM	<ul><li>Straight socket, M8x1, 3-pin</li><li>Open end, 3-core</li></ul>			
	GM	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> </ul>			
	GM GN	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> </ul>	5 m	8078224	NEBA-M8G3-U-5-N-LE3
	GM GN	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> </ul>	5 m	8078224	NEBA-M8G3-U-5-N-LE3
	GM GN GO	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Open end, 3-core</li> </ul>	5 m	8078224 8078230	NEBA-M8G3-U-5-N-LE3 NEBA-M8W3-U-2.5-N-LE3
	GM GN GO	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, rotatable, M8x1, 3-pin</li> </ul>	5 m	8078224 8078230	NEBA-M8G3-U-5-N-LE3 NEBA-M8W3-U-2.5-N-LE3
	GM GN GO	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Open end, 3-core</li> </ul>	5 m 2.5 m 5 m	8078224 8078230 8078231	NEBA-M8G3-U-5-N-LE3  NEBA-M8W3-U-2.5-N-LE3  NEBA-M8W3-U-5-N-LE3
	GM GN GO	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Straight socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, M8x1, 3-pin</li> <li>Open end, 3-core</li> <li>Angled socket, rotatable, M8x1, 3-pin</li> </ul>	5 m 2.5 m 5 m	8078224 8078230 8078231	NEBA-M8G3-U-5-N-LE3  NEBA-M8W3-U-2.5-N-LE3  NEBA-M8W3-U-5-N-LE3

2025/03 – Subject to change

or on the website using the individual search terms:


Internet → connection technology, silencer, blanking plug

- N - Flow rate on valve terminal: 830 l/min

Solenoid valve width 26 mm

- **\** - Voltage 24 V DC

Operating pressure
0.3 ... 1 MPa
3 ... 10 bar

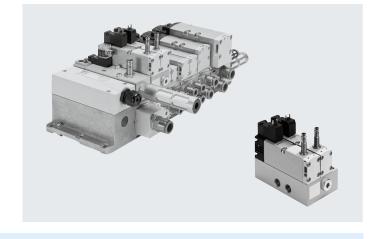


#### Description

The control block is designed for two-channel control of pneumatic drive components such as double-acting linear cylinders and can be used to realise the following protective measures:

- Protection against unexpected start-up (EN 1037)
- Reversing hazardous movements, provided the reversing motion will not result in further hazards

Version for valve terminal VTSA/VTSA-F



The control attributes of the control block enable Performance Level e to be achieved for the protective measures. The control block has been developed and manufactured in accordance with the basic and proven safety principles of EN ISO 13849-1 and EN ISO 13849-2.

The valves with integrated switching position sensing on manifold sub-base for valve terminal VTSA/VTSA-F need to be supplied with power regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

The requirements of EN ISO 13849-1 and EN ISO 13849-2 (e.g. CCF, DC) must be taken into consideration when installing and operating the component and when using it in higher categories (2 to 4)

When using this product in machines or systems subject to specific C standards, the requirements specified in these standards must be observed.

The electrical connection for the solenoid valves is established separately via a standardised square plug to EN 175301-803, type C.

The switching position sensing of the inductive PNP or NPN proximity switch is via a push-in connector size M8x1 to EN 61076-2-104.

The control block with safety function is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode)!

The control block with safety function is suitable for use as a press safety

More information and technical data

→ Internet: User documentation



#### Note

valve to EN 962.

The appropriate manifold sub-base VABV-S4-..., which is required for integration into the valve terminal, is not part of the control block. It is automatically allocated by the configurator when the control block is selected.

- - Note

The control block with safety function (VOFA) is also available as a decentralised individual connection variant with electrical and pneumatic individual connection. For information see:

→ Internet: vofa

148

#### Pneumatic/electrical links

Function


The safety function is achieved by pneumatically linking two ducts for two 5/2-way single solenoid valves within the control block: port 4 is only pressurised if both solenoid valves are switched to switching position 14.

Port 2 is always pressurised if at least one of the two solenoid valves is in the normal position. The valves are reset via a mechanical spring.

The switching operation of the solenoid valves can be sensed using the proximity switches on the solenoid valves (switching position sensing). By connecting the control signal and the switching signal of the proximity switch it is possible to check if the piston spool of the solenoid valve has reached or left the normal position (expectations). The piston spools of the solenoid valves are designed so that pneumatic short circuits between ports 2 and 4 are prevented (positive overlap).

The two solenoid valves must be actuated via two separate ducts to achieve the required category 4 (Performance Level e, to EN ISO 13849-1).

#### Circuit symbol<sup>1)</sup>

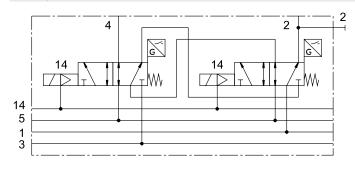

For the control block with safety function VOFA-B26-T52-... for the valve terminal, two 5/2-way solenoid valves of width 26 mm are pneumatically linked via two ducts, using an intermediate plate as vertical stacking element (output 2 is switched in parallel, output 4 is switched in series).

1) The circuit diagram represents a valve with a proximity switch with a N/O switching output signal.

This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. The switching element function of the sensors used here is designed as an N/C contact.


Safety data						
Conforms to standard	N 13849-1					
Safety function	Protection against manipulation, prevention of unexpected start-up					
	Reversing a movement					
Performance level (PL)	Protection against manipulation, prevention of unexpected start-up/up to category 4, Performance Level e					
	Reversing a movement/up to category 4, Performance Level e					
Note on forced checking procedure	Switching frequency at least once a week					
Certificate-issuing authority	IFA 1001179					
CE marking (see declaration of conformity)	To EU EMC Directive <sup>1</sup> )					
	To EU Machinery Directive					
Max. positive test pulse [μs] with logic 0	1000					
Max. negative test pulse $[\mu s]$ with logic 1	800					
Shock resistance	Shock test with severity level 2, to EN 60068-2-27					
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6					

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... -> Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

#### Peripherals overview

Electrical connection option for control block with safety function via PROFIsafe shut-off module CPX-FVDA-P2 (safety module)

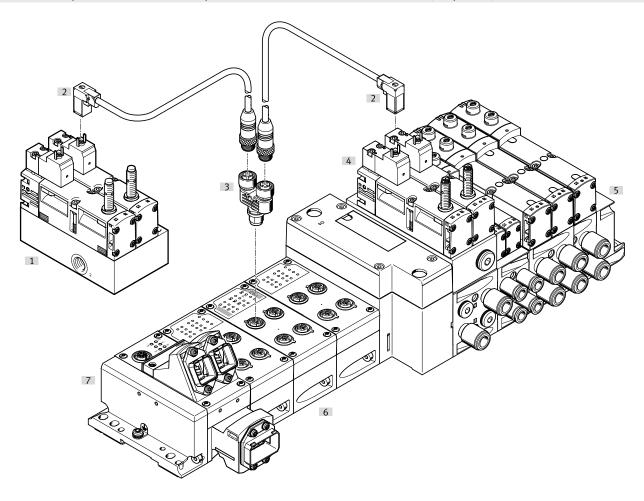

Perip	Peripherals overview								
		Description	→ Page/Internet						
[1]	Control block with safety function	Away from the valve terminal as a decentralised individual connection variant	vofa						
[2]	Connecting cable KMEB	For electrical connection of the control block with safety function via PROFIsafe shut-off module CPX-FV-DA-P2 (safety module)	kmeb						
[3]	Push-in T-connector NEDU	For simultaneously actuating two valves, e.g. control block with safety function	nedu						
[4]	Control block with safety function	Integrated in the pneumatic section of the valve terminal VTSA/VTSA-F	-						
[5]	Pneumatic section of the valve terminal VTSA/VTSA-F	Pneumatic components of the valve terminal VTSA/VTSA-F	_						
[6]	CPX-FVDA-P2 (safety module)	PROFIsafe shut-off module integrated in the CPX terminal of the valve terminal VTSA/VTSA-F	срх						
[7]	CPX terminal of the valve terminal VTSA/VTSA-F	Electrical components of the valve terminal VTSA/VTSA-F	_						

General technical data		
Design		Piston spool valve
Standard nominal flow rate	[l/min]	830
Reset method		Mechanical spring
Sealing principle		Soft
Exhaust air function		Can be throttled
Actuation type		Electrical
Overlap		Positive overlap
Type of control		Piloted
Flow direction		Not reversible
Exhaust air function		Can be throttled
Suitable for vacuum		-
Nominal width	[mm]	9
Pilot air supply		Via the valve terminal
Type of mounting		Via through-hole, on manifold sub-base
Mounting position		Any
Manual override		-
Signal status display, valve		With accessories
Pneumatic connections		
Supply	1	Via the manifold sub-base of the valve terminal
Exhausting	3/5	
Working ports	2/4	
Pilot air supply	14	
Pressure gauge		G1/4

Operating and environmental cond	itions						
Operating medium		mpressed air to ISO 8573-1:2010 [7:4:4]					
Pilot medium		Compressed air to ISO 8573-1:2010 [7:4:4]					
Notes on operating/		Lubricated operation possible (in which case lubricated operation will always be required)					
Pilot medium							
Operating pressure	[bar]	010					
	[MPa]	01					
Operating pressure for valve termi-	[bar]	310					
nal with internal pilot air supply	[MPa]	0.3 1					
Pilot pressure	[bar]	310					
	[MPa]	0.3 1					
Noise level LpA	[dB(A)]	85					
Ambient temperature	[°C]	-5 +50					
Temperature of medium	[°C]	-5 +50					
CE marking (see declaration of confo	rmity)	To EU EMC Directive <sup>1</sup> )					
		To EU Machinery Directive					

<sup>1)</sup> For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... 

Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Electrical data for cont	rol block							
Electrical connection			lug to EN 175301-803, type C, without PE conductor					
Nominal operating volt	age	[V DC]	i					
Permissible voltage flu	ctuations	[%]	<del>-15/+10</del>					
Surge resistance		[kV]	2.5					
Pollution degree			3					
Power consumption		[W]	1.8					
Max. magnetic disrupti	Max. magnetic disruption field [mT]		60					
Switching position sens	sing		Normal position via sensor					
Duty cycle		[%]	100					
Degree of protection to	EN 60529		IP65, NEMA 4 (for all types of signal transmission when mounted)					
Protection against dire	ct and		PELV					
indirect contact			Protection class to EN 60950/IEC 950					
Valve switching time	On	[ms]	22					
Off		[ms]	59					
Valve sensor switch-	On	[ms]	60					
ing time 1)	Off	[ms]	11					

<sup>1)</sup> Valve sensor switching time off: period of time from the coil being energised to the sensor being switched off when using a PNP sensor Valve sensor switching time on: period of time from the coil being de-energised to 0-L edge at the sensor when using a PNP sensor.



With a 100% duty cycle, the control block must be de-energised once per week.


Electrical data – Sensor (to EN -	60947-5-2)	
Electrical connection		Cable, 3-core
		Plug M8x1, 3-pin
Cable length	[m]	2.5
Switching output		PNP or NPN
Switching element function		N/C
Signal status indication		Yellow LED
Operating voltage range	[V DC]	10 30
Residual ripple	[%]	±10
No-load current for sensor	[mA]	Max. 10
Max. output current	[mA]	200
Voltage drop	[V]	Max. 2
Max. switching frequency	[Hz]	5000
Short circuit current rating		Pulsed
Reverse polarity protection for sensor		For all electrical connections
Measuring principle		Inductive

Materials						
Sub-base/manifold sub-base	Wrought aluminium alloy					
Valve	Die-cast aluminium, PA					
Seals	FPM, NBR, HNBR					
Screws	Galvanised steel					
Sensor housing	High-alloy stainless steel					
Sensor cable sheath	PUR					
Note on materials	RoHS-compliant					

#### **Dimensions**

Version for valve terminal VTSA/VTSA-F

Download CAD data → www.festo.com

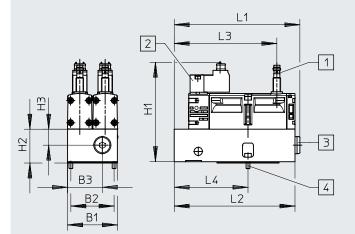



- [1] Proximity switch PNP or NPN, size M8x1, plug connection to EN 61076-2-104
- [2] Electrical connection to EN 175301-803, type C
- [3] Pneumatic connection G1/4 sealed with blanking plug
- [4] 2x screw with internal hex (width across flats 2.5), M4x12 (included in the scope of delivery)

Туре	B1	B2	В3	H1	H2	H3	L1	L2	L3	L4
VOFA-B26-T52-M-1C1-APP	53	46	37	105.8	34.6	17	133.7	128.5	109.2	78.5
VOFA-B26-T52-M-1C1-ANP	]									

Ordering	Ordering data							
Code	Valve function		Switching output	Weight	Part no.	Туре		
				[g]				
Control b	olock, version for valve tern	ninal VTSA/VTSA-F						
SP 2)		2x 5/2-way valve, single solenoid, mechanical spring	PNP	1112	_ 1)	VOFA-B26-T52-M-1C1-APP		
SN <sup>2)</sup>		return, with switching position sensing via inductive sensor and 3-pin sensor push-in connector M8, mounted on intermediate plate for pneumatic linking	NPN	1112	_ 1)	VOFA-B26-T52-M-1C1-ANP		

- 1) The control block with safety function can only be ordered via the valve terminal configurator and therefore does not have a separate part number. The appropriate manifold sub-required base for the valve terminal VTSA/VTSA-F is automatically allocated to the control block by the configurator.
- 2) Code letter within the order code for a valve terminal configuration




The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Please contact Festo in the event of a malfunction.

# Accessories – Control block with safety function

	Code	Description		Part no.	Туре
ug socket for the e	lectrical conr	nection of individual valves			
	-	<ul><li>Angled socket, type C, 3-pin</li><li>PG7</li></ul>		151687	MSSD-EB
	-	• Angled socket, type C, 3-pin • M12x1	539712	MSSD-EB-M12	
lluminating seal for	plug pattern	to EN 175301-803		Datasheets →	Internet: meb-ld
	-	For plug socket MSSD		151717	MEB-LD-12-24DC
Connecting cable for	electrical co	nnection of individual valves			
	GG	Angled socket, type C, 3-pin, with LED	2.5 m	151688	KMEB-1-24-2.5-LED
	GH	Open end, 3-core	5 m	151689	KMEB-1-24-5-LED
	GJ		10 m	193457	KMEB-1-24-10-LED
<b>&gt;</b> 					
Connecting cable for		al connection of sensors for switching position sensing	T		
	GM	• Straight socket, M8x1, 3-pin	2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3
	GN	• Open end, 3-core	5 m	8078224	NEBA-M8G3-U-5-N-LE3
	-	<ul><li>Angled socket, rotatable, M8x1, 3-pin</li><li>Open end, 3-core</li></ul>	2.5 m	8001660	NEBU-M8R3-K-2.5-LE3
	-		5 m	8001661	NEBU-M8R3-K-5-LE3
Connecting cable for	the electrica	al connection of PROFIsafe shut-off module CPX-FVDA-P2 to the control block			
	-	For the easy connection of one control block valve (power supply via PROFIsafe shut-off module CPX-FVDA-P2)  • Angled socket, type C, 3-pin, with LED  • Straight plug M12x1, 5-pin	0.5 m	177677	KMEB-2-24-M12-0.5-LED
Push-in T-connector	for dual elect	trical connection of PROFIsafe shut-off module CPX-FVDA-P2 to the control blo	ock		
	-	For dual connection of two control block valves (power supply via PROFIsafe shut-off module CPX-FVDA-P2)  • Straight plug, M12x1, 5-pin (A-coded)  • 2x straight socket, M12x1, 5-pin (A-coded)		2839867	NEDU-L2R1-V10-M12G5-M12G5
Pneumatic connection	n accessories				
•	ssories can b	nking plugs, silencers and se found in the chapter " <b>Accessories</b> " → page: 189			





Flow rate 150 l/min (18 mm) 450 l/min (26 mm)

Valve width 18 mm 26 mm

Voltage 24 V DC

Operating pressure -0.9 ... 10 bar

#### Description

The pilot air switching valve is essentially a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S...

It enables the pilot air supply to be verifiably switched on and off (sensor function) from duct 1 to 14 for the entire pressure zone or valve terminal. This valve is not a safety device in accordance with the Machinery Directive 2006/42/EC. When used in higher categories, the sensor signal from the

valve must be evaluated by the control system.

This valve is suitable for use in safety-related parts of control systems to EN ISO 13849-1.

This valve is designed for installation in machines and automation systems and must only be used in industrial applications (high-demand mode).

#### Alternative switching position sensing with pressure switch

As an alternative to the sensing function in the solenoid valve, a pressure switch can be mounted (in place of the blanking plug) in the intermediate

plate VABF-S4-...-S. With this pressure switch, the switching on and off (sensing function) of the pilot air supply can be verified.


An ISO solenoid valve without a sensor can therefore be mounted on the intermediate plate to give the same function.

→ Internet: spba



The pilot air switching valve can only be operated on the valve terminal VTSA/ VTSA-F in combination with a right end plate for external pilot air type VABE-S6-1RZ-.... Port 14 on the right end plate must then be sealed.

Vertical stacking variant for valve terminal VTSA/VTSA-F, width 18 mm, 26 mm



The valves with integrated switching position sensing in plug-in design for valve terminal VTSA/VTSA-F can be used regardless of the type of electrical actuation (individual, multi-pin plug or fieldbus/control block connection).

This module is supplied pre-assembled together with the valve terminal VTSA/VTSA-F. No other assembly steps are required before installation.

Switching position sensing is carried out using an inductive PNP proximity switch with cable and M12x1 push-in connector to EN 61076-2-104. Alternatively, combinations with a pressure switch in the intermediate plate and ISO solenoid valves are possible.


Note

All solenoid valves VSVA to ISO 15407-1 can be used.

→ Internet: vsva

The circuit diagram represents a valve with a proximity switch with a N/O switching output signal. This symbol applies to both N/O and N/C contacts, in accordance with ISO 1219-1. The switching element function of the sensors used here is designed as an N/C contact.

#### Function of pneumatic/electrical links



The function for switching off the pilot air is essentially achieved by combining the intermediate plate type VABF-S4-...-S with the 5/2-way single sole-noid valve type VSVA-B-M52-MZD-...-1T1L-APX-0.5. The valve terminal is not supplied with any pilot air via the right end plate type VABE-S6-1 (ident. code XS, external pilot air). Port 14 on the end plate is sealed.

The pilot air for the valve is branched from duct 1 in the intermediate plate and redirected to the pilot air duct 14 of the valve terminal when the valve is in the switching position. Ports 2 and 4 of the manifold sub-base are sealed with blanking plugs. The switching operation of the solenoid valve can be sensed using the proximity switch in the solenoid valve (or pressure sensor in the intermediate plate VABF...).

By connecting the control signal and the switching signal of the proximity switch it is possible to check if the piston spool of the solenoid valve has reached or left the normal position (expectations).

The piston spool of the solenoid valve is designed so that pneumatic short circuits between ports 2 and 4 are prevented (overlap).

Alternatively, combinations with a pressure switch in the intermediate plate and ISO solenoid valves are possible.



A valve from the modular system VTSA/VTSA-F can be provided or configured to the right of the valve with switching position sensing on the intermediate plate of the pilot air switching valve.

Pilot air switching valve with integrated switching position sensing

The pilot air switching valve can be ordered as a combination of a 5/2-way solenoid valve with switching position sensing and the intermediate plate VABF-S4-...-S.

Alternative switching position sensing with pressure switch

As an alternative to the pilot air switching valve with integrated switching position sensing, it is possible to combine an ISO solenoid valve and a pressure switch in the intermediate plate.

To do this, various 5/2-way solenoid valves in combination with a pressure switch SPBA-... are available.

Safety data	Safety data				
Conforms to standard	EN 13849-1/2				
CE marking (see declaration of conformity)	To EU EMC Directive 1)				
Shock resistance	Shock test with severity level 2, to EN 60068-2-27				
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6				

1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


Safety characteristics			
Valve function 5/2-way, single solenoid		Test pulses	
		Max. positive test pulse with 0 signal	Max. negative test pulse with 1 signal
VSVA-B-M52-MZA1-1T1L	[µs]	1200	1100
VSVA-B-M52-MZA2-1T1L	[µs]	1500	800
VSVA-B-M52-MZ-A1-1C1	[µs]	1800	800

General technical data				
		solenoid valve type VSVA-B-M52-MZD-A2-1T1L-APX-0.5	solenoid valve type VSVA-B-M52-MZD-A1-1T1L-APX-0.5	
		mounted on valve terminal VTSA/VTSA-F	mounted on valve terminal VTSA/VTSA-F	
Width		18 mm	26 mm	
Design		Piston spool valve		
Sealing principle		Soft		
Overlap		Positive overlap		
Actuation type		Electrical		
Type of control		Piloted		
Type of mounting:				
Solenoid valve on intermed	diate	M3	M4	
plate				
Intermediate plate on man	ifold	M3x12 (captive)	M4x12 (captive)	
sub-base				
Mounting position		Any		
Pneumatic connections				
Supply 1		Via the manifold sub-base of the valve terminal		
Exhausting	3/5 Via the manifold sub-base of the valve terminal			
Working ports	2/4	Sealed with blanking plug type B-1/4		
Pilot air supply	14	Via the manifold sub-base of the valve terminal		
Pressure gauge/pressure s	witch	G1/8		

Switching times [ms]					
Width		18 mm	26 mm		
Valve type		5/2	5/2		
Identifier		MZD-A2	MZD-A1	MZ-A1	
Valve switching time	On	12	20	21	
	Off	38	54	41	
Valve sensor switching time <sup>1)</sup>	On	32	60	60	
	Off	9	11	11	

Valve sensor switching time off: period of time from the coil being energised to the sensor being switched off when using a PNP sensor.
 Valve sensor switching time on: period of time from the coil being de-energised to 0-L edge at the sensor when using a PNP sensor.


#### Protective circuit

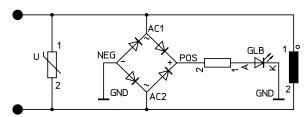

Each solenoid coil VSVA is provided with a spark arresting protective circuit and protected against polarity reversal.

#### Peripherals overview

Pilot air switching valve with switching position sensing

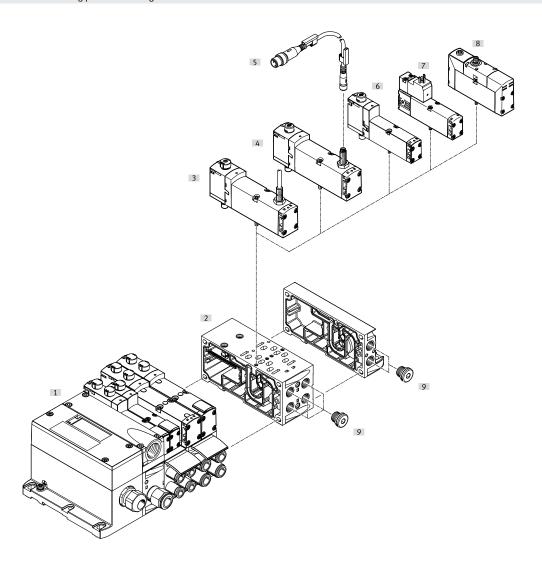

Perip	Peripherals overview – Pilot air switching valve					
		Description	→ Page/Internet			
[1]	Valve terminal VTSA/VTSA-F	Valve terminal with multi-pin plug interface	vtsa			
[2]	Manifold sub-base VABF	Width 18 mm or 26 mm	128			
[3]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with sensor and integrated cable 0.5 m	161			
[4]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with sensor for external connecting cable	161			
[5]	Connecting Cables NEBA	For connecting to the sensor	162			
[6]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm <sup>1)</sup>	161			
[7]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with plug to EN 175301, type C <sup>1)</sup>	161			
[8]	Solenoid valve VSVA-B-M52	Width 18 mm or 26 mm, with round plug <sup>1)</sup>	vsva			
[9]	Blanking plug	-	190			

The switching position is sensed by pressure switches when the solenoid valves used have no integrated sensor.
 The pressure switch is screwed into the intermediate plate in place of the blanking plug.

Electrical data for pilot air switch	lectrical data for pilot air switching valve				
Nominal operating voltage	[V DC]	24			
Permissible voltage fluctuations	[%]	±10			
Surge resistance	[kV]	2.5			
Pollution degree		3			
Power consumption	[W]	1.6 (M52-MZD), 1.8 (M52-MZ)			
Max. magnetic disruption field	[mT]	60			
Switching position sensing		Normal position via sensor			
Duty cycle	[%]	100			
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)			

Electrical data for sensor						
Sensor designation		APP	ANP	APC	ANC	APX
Switching output		PNP	NPN	PNP	NPN	PNP
Sensor connection		Plug, M8x1, 3-pin		With fixed cable	and open end	With fixed cable and plug M12x1, 4-pin
Cable length	[m]	0.5 (with socket M8x1, p	lug M12x1)	2.5		0.5
Switching element function		N/C				
Signal status indication		Yellow LED (on the senso	r)			
Operating voltage range	[V DC]	10 30				
Residual ripple	[%]	±10			,	
Rated operating voltage	[V DC]	24				
Max. no-load current	[mA]	10				
Max. output current	[mA]	200			, i	
Max. voltage drop	[V]	2				
Max. switching frequency	[Hz]	5000				
Short circuit current rating		Pulsed				
Reverse polarity protection		For all electrical connections				
Measuring principle		Inductive				
Switching position sensing		Valve normal position via	sensor			

Operating and environmental con-	ditions			
Valve		VSVA-B-M521T1L	VSVA-B-M521C1	Without sensor
Operating medium	•	Compressed air to ISO 8573-1:2010 [7:4:4]		
Notes on operating/pilot medium		Lubricated operation possible (in which case	lubricated operation will always be required)	
Operating pressure	[bar]	-0.9 10	-0.9 16	-0.9 10
	[MPa]	-0.09 1	-0.09 1	-0.09 1
Noise level LpA	[dB(A)]	85	85	-
Ambient temperature	[°C]	-5 +50	-5 +50	-5 +50
Temperature of medium	[°C]	-5 +50	-5 +50	-
Note on materials		RoHS-compliant	RoHS-compliant	RoHS-compliant
KC marking		KC EMC	KC EMC	-
UKCA marking		To UK EMC regulations	To UK EMC regulations	-
Certification		C-Tick	C-Tick	-
		c UL us Recognized (OL)	-	c UL us Recognized (OL)

Materials	Materials				
Sub-base/manifold sub-base	Die-cast aluminium				
Valve	Die-cast aluminium, PA				
Seals	FPM, NBR				
Screws	Galvanised steel				
Sensor housing	High-alloy stainless steel				
Sensor cable sheath	TPE-U(PUR)				

Product weight					
Width	18 mm	26 mm			
Solenoid valve					
VSVA-B-M52-MZD-A1-1T1L-APC	-	307 g			
VSVA-B-M52-MZD-A1-1T1L-APP	-	264 g			
VSVA-B-M52-MZ-A1-1C1-APC	-	332 g			
VSVA-B-M52-MZ-A1-1C1-APP	-	289 g			
VSVA-B-M52-MZD-A1-1T1L-ANC	-	307 g			
VSVA-B-M52-MZD-A1-1T1L-ANP	-	264 g			
VSVA-B-M52-MZ-A1-1C1-ANC	-	332 g			
VSVA-B-M52-MZ-A1-1C1-ANP	-	289 g			
VSVA-B-M52-MZD-A1-1T1L-APX-0.5	-	281 g			
VSVA-B-M52-MZD-A2-1T1L-APX-0.5	157 g	-			
VSVA-B-M52-MZD-A2-1T1L-APP	140 g	-			
VSVA-B-M52-MZD-A2-1T1L-ANP	140 g	-			
VSVA-B-M52-MZD-A1-1T1L	-	293 g			
VSVA-B-M52-MZD-A2-1T1L	163 g	-			

# Ordering data – Pilot air switching valve

ordering data	Code	Valve function			Part no.	Туре
2-way solenoid valve,	24 V DC, p	lug-in design with proximity switch		:		
<b>9</b> > n	SS	5/2-way valve, single solenoid, mechanical spring return,	PNP	18 mm	573201	VSVA-B-M52-MZD-A2-1T1L-APX-0.5
		with 0.5 m connecting cable and 4-pin sensor push-in connector M12x1		26 mm	570850	VSVA-B-M52-MZD-A1-1T1L-APX-0.5
	-	5/2-way valve, single solenoid, mechanical spring return,	PNP	26 mm	560723	VSVA-B-M52-MZD-A1-1T1L-APC
		with 2.5 m connecting cable	NPN	26 mm	560742	VSVA-B-M52-MZD-A1-1T1L-ANC
	SO	5/2-way valve, single solenoid, mechanical spring return,	PNP	18 mm	573202	VSVA-B-M52-MZD-A2-1T1L-APP
		with 3-pin sensor push-in connector M8x1		26 mm	560724	VSVA-B-M52-MZD-A1-1T1L-APP
	SQ		NPN	18 mm	573203	VSVA-B-M52-MZD-A2-1T1L-ANP
				26 mm	560743	VSVA-B-M52-MZD-A1-1T1L-ANP
3	-	, , , , , , , , , , , , , , , , , , , ,	PNP	26 mm	560725	VSVA-B-M52-MZ-A1-1C1-APC
			NPN	26 mm	560745	VSVA-B-M52-MZ-A1-1C1-ANP
	-	5/2-way valve, single solenoid, mechanical spring return,	PNP	26 mm	560726	VSVA-B-M52-MZ-A1-1C1-APP
		with plug to EN 175301, type C, with 3-pin sensor push-in connector M8x1	NPN	26 mm	560744	VSVA-B-M52-MZ-A1-1C1-ANC
2-way solenoid valve,	24 V DC, p	lug-in design				
<b>e</b> >	-	5/2-way valve, single solenoid, mechanical spring return		26 mm	539159	VSVA-B-M52-MZD-A1-1T1L
				18 mm	539185	VSVA-B-M52-MZD-A2-1T1L



Further solenoid valves with switching position sensing can be ordered as distinct types. These are preconfigured with the appropriate manual override cover caps.

→ Solenoid valve with switching position sensing, page 138



The sensors integrated in the valves must not be replaced by the customer. Incorrect assembly can result in malfunctions or damage to the valve. Please contact Festo in the event of a malfunction.

# Valve terminal VTSA/VTSA-F, NPT

# Ordering data – Pilot air switching valve

Ordering data						
	Code	Description		Part no.	Туре	
Pressure switch for	intermediate p	late for pilot air switching valve				
	WL	Mechanical pressure switch (only in combination with inter with plug M12x1, 4-pin	mediate plate ZO),	8000033	SPBA-P2R-G18-W-M12-0.25X	
	WH	Electrical pressure switch, switching output 2xPNP (only in mediate plate ZO), with plug M12x1, 4-pin	lectrical pressure switch, switching output 2xPNP (only in combination with inter- nediate plate ZO), with plug M12x1, 4-pin			
Connecting cable for	or connection of	f pressure switches				
	GE	<ul> <li>Straight socket, M12x1, 5-pin</li> <li>Straight plug, M12x1, 4-pin</li> </ul>	0.5 m	8000208	NEBU-M12G5-K-0.5-M12G4	
Connecting cable for	or the electrical	connection of sensors for switching position sensing				
MI ME	$\overline{}$	<ul> <li>Straight socket, M8x1, 3-pin</li> <li>Straight plug, M12x1, 3-pin</li> </ul>	0.5 m	8000209	NEBU-M8G3-K-0.5-M12G3	
	GM	<ul><li>Straight socket, M8x1, 3-pin</li><li>Open end, 3-core</li></ul>	2.5 m	8078223	NEBA-M8G3-U-2.5-N-LE3	
<b>1</b>	GN		5 m	8078224	NEBA-M8G3-U-5-N-LE3	
$\sim$	GO	Angled socket, M8x1, 3-pin	2.5 m	8078230	NEBA-M8W3-U-2.5-N-LE3	
	GP	Open end, 3-core	5 m	8078231	NEBA-M8W3-U-5-N-LE3	
	-	Angled socket, rotatable, M8x1, 3-pin	2.5 m	8001660	NEBU-M8R3-K-2.5-LE3	
	-	Open end, 3-core	5 m	8001661	NEBU-M8R3-K-5-LE3	

# Ordering data – Pilot air switching valve

Ordering data	Code	Description Part no. Type							
	Couc	Description		Tart no.	Турс				
Covering									
	N	Cover cap for manual override, non-detenting	Pack of 10	541010	VAMC-S6-CH				
	V	Cover cap for manual override, concealed	Pack of 10	541011	VAMC-S6-CS				
	A	Cover cap, heavy duty, for manual override, non-detenting heavy duty, detenting via accessory (key) (The cover cap is provided for one-off mounting only)	Pack of 10	4105147	VAMC-B-S6-CTR				
Accessories for manual	l override, he	eavy duty							
	-	Coded key (accessory) for actuating cover cap, heavy duty, for detenting position	Pack of 1	1662543	АНВ-МЕВ-В				
Pneumatic connection accessories  A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter "Accessories" > page: 180									

A selection of possible fittings, blanking plugs, silencers and other pneumatic accessories can be found in the chapter "Accessories" → page: 189 or on the website via the individual search terms:


**Internet** → connection technology, silencer, blanking plug




There is a wide range of preconfigured solenoid valves with cover cap for manual override and correct valve type code available to order in the sections on solenoid valves.

#### Datasheet - Soft-start valve for VTSA/VTSA-F

# Function without sensor



#### With sensor



#### - 11 -

Flow rate

Pressurisation: 3000 l/min Exhausting: 3300 l/min

Module width 43 mm





Operating pressure 0.2 ... 1.2 MPa 2 ... 12 bar



#### Description

#### Function

The purpose of the soft-start valve is to slowly and safely build up the supply pressure in duct 1 of the valve terminal or to quickly exhaust it via duct 1.

Switch-on takes place in two stages:

 First the working pressure for duct 1 gradually increases (the speed can be adjusted using a throttle screw).  Once the working pressure in duct 1 reaches a previously set value, the soft-start valve switches to full operating pressure at duct 1 of the valve terminal.

The switching point for full operating pressure is set to 4 bar at the factory, but can be changed using an adjusting screw.

The full operating pressure is applied at duct 14 (pilot air) at all times. This pressure causes the valves on the valve terminal to immediately move to the required switching position, so an unspecified position is not possible.

Duct 1 of the valve terminal is exhausted via the soft-start valve's exhaust port only in the normal position, when the valve is not switched. The exhaust air can optionally be ducted with a fitting or using a silencer.

A detenting manual override with self-reset via an electrical control signal is available for maintenance and service purposes.



When using "Protection against unexpected start-up":

Protection against unexpected activation of the manual override (MO) must be guaranteed in all operating modes.

#### Diagnostics

The piston position of the soft-start valve can be monitored by a sensor with integrated LED display. This sensor registers whether the valve has switched and thus whether the valve terminal is being supplied with supply air.

Pressure sensing via a pressure gauge (optional) is also possible.

The soft-start valve can also be ordered with a sensor. A sensor cannot be retrofitted at a later date because of the calibration that is required.

Connecting cables with integrated LED display are provided for displaying the signal status.

#### Pilot air supply

The valve terminal can either be supplied with internal pilot air via the soft-start valve or with internal or external pilot air via the various end plate variants.

The pilot air supply for the valve terminal (internal/external) is determined by the seal between the manifold subbase and the soft-start valve.

The scope of delivery of the soft-start valve includes both the seal for internal pilot air supply (with drilled hole) and the seal for external pilot air supply (no drilled hole).

The soft-start valve itself is always supplied with internal pilot air.

#### Datasheet - Soft-start valve for VTSA/VTSA-F

#### Creating pressure zones with a soft-start valve

The soft-start valve can be used for the pneumatic compressed air supply of the valve terminal or of a pressure zone. The soft-start valve can only be used as the sole compressed air supply component on valve terminals with one pressure zone or within a pressure zone.

If a soft-start valve in combination with a right end plate (code XP3) is chosen for a pressure zone, a supply plate with a blanking plug in duct 1 (code W) is required in this pressure zone. When using a soft-start valve, a supply plate (with blanking plug in duct 1) is generally also required for this pressure zone to discharge the exhaust air (duct 3/5).

A supply plate is not required if the exhaust air (duct 3/5) in a pressure zone with a soft-start valve can be expelled via the right end plate.

#### Constraints

Compressed air supply

There must be no other elements supplying compressed air in the pressure zone in which the soft-start valve is being used. Exhaust air

Exhaust air cannot be expelled via the soft-start valve. If it is being used in a pressure zone with separate duct 3/5, an exhaust plate is required.

Pilot air supply

If the soft-start valve is used for internal pilot air supply (duct 14), there must be no other pilot air supply within the valve terminal. Reverse operation

The soft-start valve is not approved for reverse operation.



Setting options as well as drawings with descriptions of the components for the soft-start valve can be found in the user documentation.

The adjusting screws are freely accessible once they are fitted.

Safety characteristics
------------------------

Conforms to standard	ISO 5599-2
Note on forced checking procedure	Switching frequency min. once a month
Max. positive test pulse [µs]	2500 <sup>1)</sup>
with logic 0	
Max. negative test pulse [μs]	14001)
with logic 1	
Shock resistance	Shock test with severity level 2, to EN 60068-2-27
Vibration resistant	Transport application test with severity level 2, to EN 60068-2-6

<sup>1)</sup> Values apply only to types with direct voltage 24 V DC

General	technical	data

Design	Piston spool
Actuation type	Electrical
Sealing principle	Soft
Type of mounting	On sub-base, ISO size 1 to ISO 5599-2
Mounting position	Any
Valve function	Soft-start function
Manual override	Detenting, self-resetting via electrical control signal, normal position on top, → page 171
Reset method	Mechanical spring
Type of control	Piloted
Pilot air supply	Internal, external
Flow direction	Not reversible
Switching position sensing	Switching position with sensor

#### Standard nominal flow rate [l/min]

Pressurisation	3000
Exhausting	3300

# Datasheet – Soft-start valve for VTSA/VTSA-F

Operating and environmental conditions			
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]	
Notes on operating/ pilot medium		Lubricated operation possible (in which case lubricated operation will always be required)	
Operating pressure	[bar]	212	
	[MPa]	0.2 1.2	
Switchover pressure presetting	[bar]	4	
	[MPa]	0.4	
Ambient temperature	[°C]	-5 +50	
Note on materials		RoHS-compliant	

Valve switching times [ms]			
Valve switching time	On	17	
	Off	50	

Electrical data for soft-start valve	Electrical data for soft-start valve				
Electrical connection		Plug, type C to EN 175301-803, square design			
Nominal operating voltage	[V]	24 DC			
Operating voltage range	[V]	24 DC ±10%			
Characteristic coil data		24 V DC: 2.5 W			
Degree of protection to EN 60529		IP65, NEMA 4 (for all types of signal transmission when mounted)			

Electrical data for sensor				
Туре		SIEN-M12B-PS-S-L	SIEN-M12B-NS-S-L	
Electrical connection		Plug M12x1 to EN 60947-5-2, 4-pin		
Switching output		PNP	NPN	
Switching element function		N/O		
Signal status indication		Yellow LED		
Operating voltage range	[V DC]	10 30		
Residual ripple	[%]	±10		
Rated operating voltage	[V DC]	24		
Max. no-load current for sensor	[mA]	10		
Max. output current	[mA]	200		
Max. voltage drop	[V]	2		
Max. switching frequency	[Hz]	3000		
Short circuit current rating		Pulsed		
Reverse polarity protection for sensor		For all electrical connections		
Measuring principle		Inductive		
Switching position sensing	·	Switching position with sensor		

Materials – Soft-start valve				
	Soft-start valve	Manifold sub-base		
Housing	Wrought aluminium alloy	Die-cast aluminium		
Seals	NBR, HNBR	-		
Screws	Galvanised steel	-		

#### Datasheet - Soft-start valve for VTSA/VTSA-F

#### Example 1: Pressure zone with soft-start valve and pilot air supply

Internal, external pilot air supply

#### Requirements


- Compressed air supply via soft-start valve
- Right end plate<sup>1)</sup>:
   Blanking plug in duct 1

#### For internal pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "open" and
- Right end plate: Blanking plug in duct 14

#### For external pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "closed" and
- Pilot air supply via duct 14 in the right end plate

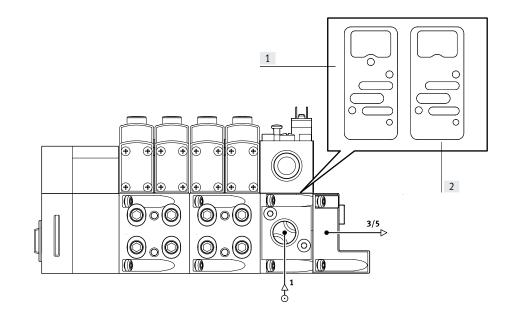

- [1] Seal for internal pilot air supply
- [2] Seal for external pilot air supply
- 1) A right end plate with pilot air selector cannot be used with this configuration, as it doesn't allow the exhaust air to be discharged

#### Example 2: Pressure zone with soft-start valve, supply plate and pilot air supply

Internal, external pilot air supply

#### Requirements


- Compressed air supply via soft-start valve
- Supply plate: Blanking plug in duct 1
- Right end plate: blanking plug in duct 1, 3, 5 or
- Right end plate with pilot air selector

#### For internal pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "open" and
- Right end plate: blanking plug in duct 14 or
- End plate with coding (position 2, internal pilot air supply)

#### For external pilot air supply:

- Seal (soft-start valve manifold sub-base) with pilot air supply bore "closed" and
- Pilot air supply via duct 14 in the right end plate or
- End plate with coding (position 1, external pilot air supply)

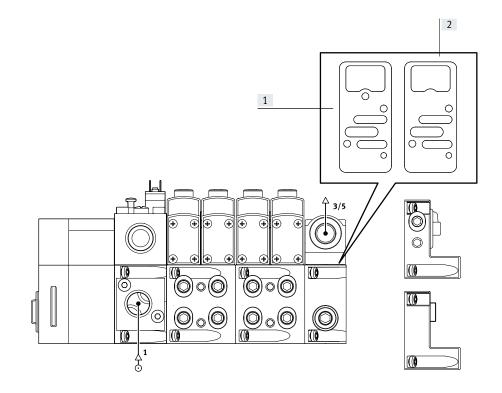

- [1] Seal for internal pilot air supply
- [2] Seal for external pilot air supply


#### Datasheet - Soft-start valve for VTSA/VTSA-F

#### Practical example 1: Valve terminal VTSA with CPX terminal (metal design) and soft-start valve

With internal pilot air (PP and XP2):

With external pilot air (PM and XP1):

Selection no.: 539217

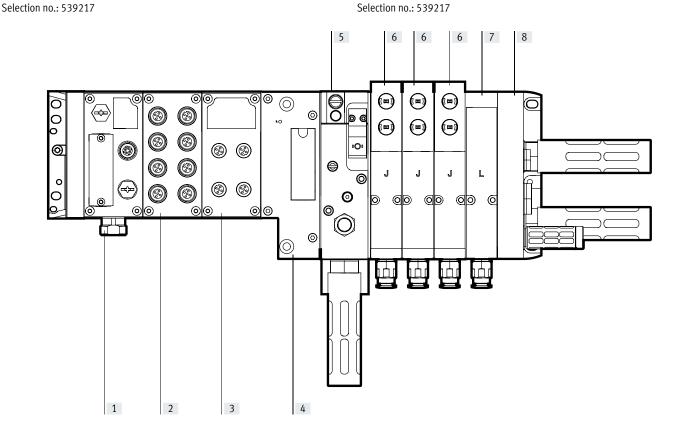

- [1] Bus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- Soft-start valve (PP - internal pilot air)
- [5] Soft-start valve (PM - external pilot air)
- [6] 5/2-way valve, double solenoid (J)
- [7] Vacant position (L)
- Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14
- [8] Right end plate (XP1) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1

#### Selection with internal pilot air (PP and XP2):

Selection no. in online catalogue: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA Pneumatic part: 44P-N-XP2-SMPP-BB-3JL+UGBP1

#### Selection with external pilot air (PM and XP1):

Selection no. in online catalogue: 539217


Electrical part: 51E-F36GCQPNMKBLX-S+GSBA Pneumatic part: 44P-N-XP1-SMPM-BB-3JL+UGBP1

#### Datasheet - Soft-start valve for VTSA/VTSA-F, width 43 mm

#### Practical example 2: Valve terminal VTSA with CPX terminal (metal design), soft-start valve and switching position sensing

With external pilot air (PM and XP2):

Selection no.: 539217

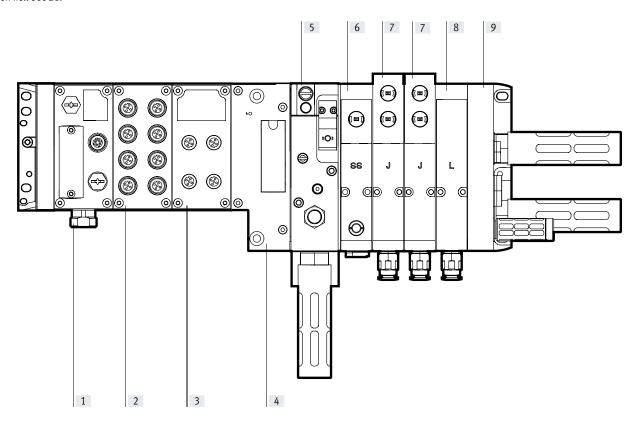

- [1] Bus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- [5] Soft-start valve (PM external pilot air)
- [6] 5/2-way single solenoid valve, spring return, switching status indication with PNP sensor with 0.5 m connecting cable and pushin connector M12x1 (SS), and intermediate plate for switchable pilot air supply (ZO)
- [7] 5/2-way double solenoid valve (J), width 26 mm
- [8] Vacant position (L)
- 9] Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14

Selection with external pilot air (PM and XP2), solenoid valve with switching position sensing (SS) and intermediate plate for switchable pilot air supply (ZO)

Selection no. in online catalogue: 539217


Electrical part: 51E-F36GCQPNMKBLX-S+GSBA
Pneumatic part: 44P-N-XP2-SMPM-BB-SSZOJJL+UGCGBP1

#### Datasheet - Soft-start valve for VTSA/VTSA-F

#### Practical example 3: Valve terminal VTSA with CPX terminal (metal design), switching position sensing, soft-start valve and 2 pressure zones

With external pilot air (PM and XP2)

Selection no.: 539217

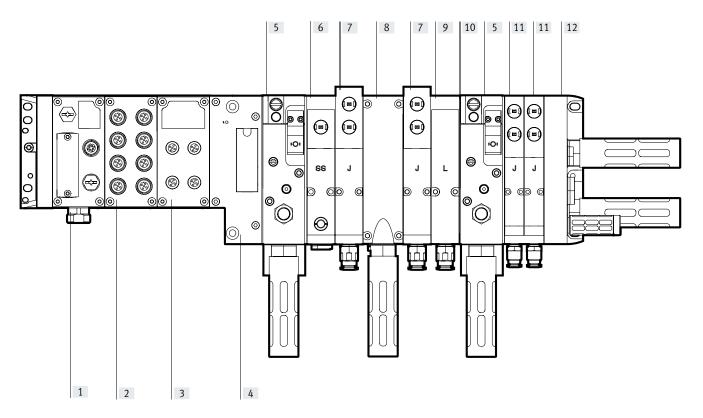

- [1] Bus node for EtherNet/IP or Modbus TCP
- [2] Input module (16 digital inputs)
- [3] Output module (8 digital outputs)
- [4] CPX pneumatic interface
- [5] Soft-start valve for one pressure zone (PM external pilot air)
- [6] 5/2-way single solenoid valve, spring return, switching status indication with PNP sensor with 0.5 m connecting cable and pushin connector M12x1 (SS), and intermediate plate for switchable auxiliary pilot air supply (ZO)
- [7] 5/2-way double solenoid valve (J), width 26 mm
- [8] Exhaust plate (W) for ducts 3/5
- [9] Vacant position (L)
- [10] Duct separation (S) 1, 3, 5
- [11] 5/2-way double solenoid valve (J), width 18 mm
- [12] Right end plate (XP2) with supply air/exhaust air, external pilot air supply, blanking plug in duct 1 and 14

Selection with external pilot air (PM and XP2), solenoid valve with switching position sensing (SS) and intermediate plate for switchable pilot air supply and 2 pressure zones

Selection no. in online catalogue: 539217

Electrical part: 51E-F36GCQPNMKBLX-S+GSBA

 $\label{prop:pneumatic} Pneumatic \ part: \qquad 44 P-N-X P2-L SMPM-BWBSPMA-SSZOJJLJJ+UGCGBP1$ 

#### Electrical connection of pneumatic components

The solenoid valve with switching position sensing (SS), with sensor connection M12 is connected to the CPX input module using an appropriate connecting cable in order to link the sensor signal into the CPX system.

The soft-start valve (PM – with sensor PNP) is connected to the CPX input module using an appropriate connecting cable (GC) in order to integrate the sensor signal into the CPX system.

A connecting cable (GBP1) to/from the CPX output module is used to control the soft-start valve (PM). (Control signal)

#### Datasheet - Soft-start valve for VTSA/VTSA-F

#### **Dimensions** Download CAD data → www.festo.com Soft-start valve 1 6 1972 4 5 ¥ 2 L1 L2 L4 B3 B1 B1 L6 [3] Soft-start valve optionally with [2] Manifold sub-base with Manual override, switching [1] Soft-start valve, (port pattern to ISO 5599-2) connecting adapter (ducts 2 sensor or protective cap position (actuated) and 4), pneumatic connection [4] Manual override, normal posi-[6] Seal for internal or external pilot G1/2 tion (unactuated) air supply of the valve terminal В1 Туре B2 ВЗ В4 В5 D1 L1 L2 L3 VABF-S6-1-P5A4-G12-4-.. M12x1 142 30 29.3 20.8 43 36.5 28 11.2 12.6 67.3 41 27

Seal 1) between soft-start valve and manifold sub-base

H1


78.9

H2

65.5

Н3


56.4



Type

VABF-S6-1-P5A4-G12-4- ...

[1] With drilled hole, internal pilot air supply



Н6

44

Н7

41.2

Н8

3.5

Н9

68.3

H10

39.5

H11

[1] Without drilled hole, external pilot air supply

Туре	H1	L1
VABD-S6	40	84.8

Н4

55.9

Н5

51.5

<sup>1)</sup> Seals are included with the soft-start valve

# Valve terminal VTSA/VTSA-F, NPT

# Datasheet – Soft-start valve for VTSA/VTSA-F


Ordering data					
	Terminal code	Description	Weight [g]	Part no.	Туре
Soft-start valve					
	-	Without sensor output (with seals for internal and external pilot air)	590	558231	VABF-S6-1-P5A4-N12-4-1
	PN	Seal for external pilot air (without drilled hole)			
	PQ	Seal for internal pilot air (with drilled hole)			
	-	With sensor output PNP (with seals for internal and external pilot air)	605	558232	VABF-S6-1-P5A4-N12-4-1-P
	PM	Seal for external pilot air (without drilled hole)			
	PP	Seal for internal pilot air (with drilled hole)			
	-	With sensor output NPN (with seals for internal and external pilot air)	605	558234	VABF-S6-1-P5A4-N12-4-1-N
	PK	Seal for external pilot air (without drilled hole)			
	PO	Seal for internal pilot air (with drilled hole)			
Manifold sub-base		1			
	-	Suitable for a soft-start valve (ports for ducts 2 and 4 combined)	570	556988	VABV-S6-1Q-N12

# Accessories – Soft-start valve for VTSA/VTSA-F

gnation	Code	Description		Part no.	Туре
er cap					'
	-	M12, for sealing the sensor opening	Pack of 10	165592	ISK-M12
ctrical connecti	on for soft-start v	valve			
	P1	Angled socket, type C, 2-pin, with LED     Straight plug M12x1, 2-pin		188024	MSSD-EB-M12-MONO
	GB	<ul><li>Straight socket, M12x1, 5-pin</li><li>Open end, 4-core</li></ul>	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	-	<ul><li>Angled socket, M12x1, 5-pin</li><li>Open end, 4-core</li></ul>	5 m	8078249	NEBA-M12W5-U-5-N-LE4
	GG	Angled socket, type C, 3-pin, with LED	2.5 m	151688	KMEB-1-24-2.5-LED
	GH	Open end, 3-core	5 m	151689	KMEB-1-24-5-LED
	GJ		10 m	193457	KMEB-1-24-10-LED
7	GK	Angled socket, type C, 3-pin	2.5 m	151690	KMEB-1-230AC-2.5
⋗	GL	Open end, 3-core	5 m	151691	KMEB-1-230AC-5
	ion also dui sal sam	nection of the proximity switch			
onnecting capie i		Straight socket, M12x1, 5-pin	5 m	8078240	NEBA-M12G5-U-5-N-LE4
	_	• Open end, 4-core	3 111	8078240	NEDA-M12G5-U-5-N-LE4
	GC	<ul><li>Angled socket, M12x1, 5-pin</li><li>Open end, 4-core</li></ul>	5 m	8078249	NEBA-M12W5-U-5-N-LE4
ilencer	'		'		
	U	Standard version (pack of 1)	1/2 NPT	12741	U-1/2-B-NPT
	A	Sintered design (pack of 10)	1/2 NPT	1206992	AMTE-M-LH-N12

#### Datasheet – Vacuum block for VTSA/VTSA-F


#### Function



- 【】- Vacuum block width 53 mm



Operating pressure
0.4 ... 0.8 MPa
4 ... 8 bar

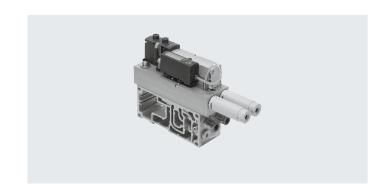

#### Description

The vacuum block can be integrated into the existing valve terminal VTSA/VTSA-F. To do this, the vacuum block is screwed to a manifold sub-base for 2 valve positions, width 26 mm.

The vacuum block is used in conjunction with a suction gripper to pick up, hold and place components. The suction gripper uses vacuum for picking up and holding.

Once the component has been positioned, it is released by an ejector pulse. This ejector pulse is created by pressurising the vacuum system so that the vacuum briefly collapses. The ejector pulse can be set.



Note

The vacuum block can be operated in combination with the vertical stacking for pilot air switch-off on the valve terminal VTSA/VTSA-F.

#### Function

The vacuum block VABF-S4-1-V2B1... is used to generate a vacuum. The generated vacuum and a suction gripper produce a force which is used to grip and transport a workpiece. The supply of compressed air for vacuum generation is controlled by a solenoid valve.

The vacuum is generated by actuating the solenoid coil 12. The setpoint value set at duct B for the generated vacuum is monitored via a vacuum sensor (with switching output). Vacuum generation reverts to a self-holding phase after reaching the setpoint value. The vacuum block controls the vacuum generation process independently within the range of the set switching points (air saving function).

The integrated solenoid valve is used to generate an ejector pulse by activating coil 14. The workpiece is thus safely released from the suction cup with connector and the vacuum is rapidly reduced. The length of the ejector pulse can be influenced by the duration of the electrical pulse. The strength of the ejector pulse is influenced by the adjustable flow control.

#### - 🖣 - Note

If the electrical or pneumatic supply fails while the valve is in the "generate vacuum" or "air saving" state, the valve moves to the "generate vacuum" position.

#### Operating mode of the air saving function (LS)

If the desired threshold value (1) (turn off suction) is reached for the vacuum, vacuum generation is automatically switched off.

Check valves prevent the reduction of the vacuum. However, leakages (e.g. due to rough workpiece surfaces) will slowly reduce the vacuum. If the vacuum drops below the set threshold value (turn on suction), vacuum generation is switched on automatically. Vacuum is generated until the set threshold value (turn off suction) is reached again.

Threshold value to turn off suction (air saving function) (1):

The vacuum generator is switched off simultaneously when the output Out A is set.

The preset value is -700 mbar.

Threshold value to turn on suction (2):

The threshold value (2) should always be above the switching point of duct B (3) "vacuum sensing".

The gap between (2) and (3) should be at least 50 mbar.

# · 🖣 - Note

Setting options and further instructions are described in the operating instructions and/or documentation VABF-S4-1-V2B1....

→ Internet

# Datasheet – Vacuum block for VTSA/VTSA-F

General technical data					
Valve function		5/3-way, pressurised			
Design		Not modular			
Mounting position		Any			
Nominal width of Laval nozzle	[mm]	2.0			
(vacuum generation)					
Ejector characteristics		High vacuum, standard			
Integrated functions		Ejector pulse valve, electric			
		Flow control			
		On/off valve, electric			
		Air-saving circuit, electric			
		Check valve			
		Open silencer			
		Vacuum switch			
Silencer design		Open			
Measured variable		Relative pressure			
Measuring principle		Piezoresistive			
Switching function		Threshold-comparator			
Short circuit current rating		Yes			
Reverse polarity protection		For all electrical connections			
Inductive protective circuit		Adapted to MZ, MY, ME coils			
Switching element function		N/O			
Threshold-value setting range	[bar]	-0.999 0 (recommended operating range: -0.950.05)			
	[MPa]	-0.0999 0 (recommended operating range: -0.0950.005)			
Hysteresis setting range	[bar]	-0.9 0			
	[MPa]	-0.09 0			
Power supply, vacuum block		Via own M12 plug			
Pneumatic supply for vacuum blo	ck	Via the valve terminal VTSA/VTSA-F			
Ejector pulse		Strength adjustable via flow control screw			
Actuation type					
Solenoid valve		Electrically actuated			
Vacuum block		Vacuum generation via Venturi nozzle			
Type of control for solenoid valve		Piloted			
Flow direction		Not reversible			
Exhaust air function		Can be throttled (duct 3 and 5)			
Type of mounting		Via through-hole, screwed onto manifold sub-base, width 26 mm			
Manual override		Detenting, non-detenting, concealed			
For vacuum generation		Yes, solenoid coil 12 (holding)			
For ejector pulse		Yes, solenoid coil 14 (spring return), (only effective when power supply is switched off)			
Signal status display, valve		LED			
Pneumatic connections					
Supply	1, 3	Via the manifold sub-base of the valve terminal, width 26 mm			
Exhausting	3/5	Via the modular silencer for vacuum block			
Working port (vacuum port)	2	Via the manifold sub-base of the valve terminal (QS push-in fitting – vacuum), G1/4			
Connection	4	Via the manifold sub-base of the valve terminal (sealed with blanking plug type B-1/4)			

Technical data for pressur	e switch of vacuum	block (delivery status)	
Duct A: air saving function			
Switching behaviour		Threshold-comparator	
Switching point	[mbar]	<b>-700</b>	
	[MPa]	-0.07	
Hysteresis	[mbar]	200	
	[MPa]	0.02	
Switching characteristic		NO (normally open contact)	
Duct B: vacuum sensing			
Switching behaviour		Threshold-comparator	
Switching point	[mbar]	-400	
	[MPa]	-0.04	
Hysteresis	[mbar]	5	
	[MPa]	0.0005	
Switching characteristic		NO (normally open contact)	



Setting options for duct A and duct B and further instructions are described in the operating manual and/or documentation VABF-S4-1-V2B1....

Electrical data		
Electrical connection		4-pin plug to ISO 15407-2 (vacuum block supplied with power separately, not via valve terminal)
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	21.6 26.4
Duty cycle	[%]	100
Max. output current	[mA]	50
Voltage drop	[V]	š1.5
No-load current	[mA]	50 150 (dependent on the switching status of the solenoid coils)
Characteristic coil data	[V DC]	24
Power consumption	[W]	1.3
(Characteristic coil data)		
Overload protection		Available
Accuracy (full scale)	[% FS]	±3
Degree of protection to EN 60529		IP65, NEMA 4 (for all types of signal transmission when mounted)

Electrical connection 1)						
2 + + + 4	Plug M12x1, 4-pin to EN 61076-2-101	Pin1 + 24 V DC (brown (BN)) Pin2 Out B (white (WH)) Pin3 0 V DC (blue (BU)) Pin4 Out A (black (BK))	Supply voltage Switching output B (duct B) 0 V DC Switching output A (duct A)			


<sup>1)</sup> Max. permissible signal cable length: 5 m

Operating and environmental co	nditions	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Notes on the operating medium		Unlubricated operation
Operating pressure	[bar]	48
	[MPa]	0.4 0.8
Nominal operating pressure	[bar]	6
	[MPa]	0.6
Pressure measuring range [bar] [MPa]		-10
		-0.1 0
Negative pressure [bar]		Up to approx. 0.9 (as a function of operating pressure)
	[MPa]	Up to approx. 0.09 (as a function of operating pressure)
Ambient temperature	[°C]	050
Temperature of medium	[°C]	050
Noise level LpA (at nominal oper-	[dB(A)]	78
ating pressure)		


Materials	
Housing, jet nozzle	Wrought aluminium alloy
Screws	Galvanised steel
Seals	NBR
Plug housing	Nickel-plated die-cast zinc
Plug contacts	Gold-plated brass
Inspection window on pressure sensor	PA PA
Pressure sensor keypad	TPE-U
Note on materials	RoHS-compliant

#### Pressure ratios, air consumption and volumetric flow rate

Vacuum as a function of operating pressure

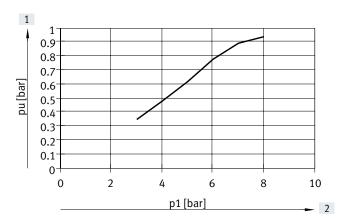


Air consumption as a function of operating pressure

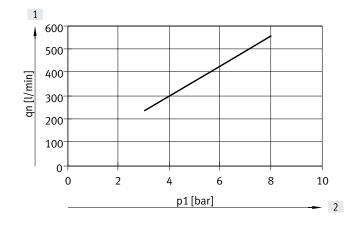

[1] Vacuum

- [2] Operating pressure
- [1] Air consumption
- [2] Operating pressure

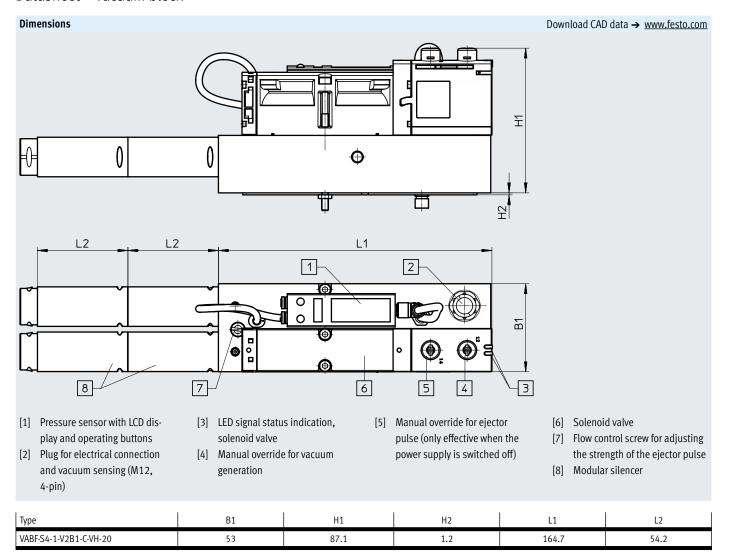

	Code	Description	Part no.	Туре	
acuum block	-		:		176-5
ractuum block	VB	Vacuum block for valve terminal VTSA/VTSA-F with air-saving function and adjustable ejector pulse	1120 g	571425	VABF-S4-1-V2B1-C-VH-20
Manifold sub-base					
	L <sup>2)</sup>	For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4	26 mm	_ 1)	VABV-S4
G G G	LK <sup>2)</sup>	For vacuum block 2 valve positions, 4 addresses, with 2 blanking plugs in port 4, with small QS fitting	26 mm	_ 1)	VABV-S4
onnecting cable					
	-	<ul><li>Straight socket, M12x1, 5-pin</li><li>Open end, 4-core</li></ul>	2.5 m	8078239	NEBA-M12G5-U-2.5-N-LE4
			5 m	8078240	NEBA-M12G5-U-5-N-LE4
	GC	<ul> <li>Angled socket, M12x1, 5-pin</li> <li>Open end, 4-core</li> </ul>	5 m	8078249	NEBA-M12W5-U-5-N-LE4
Pneumatic connection	n accessories	I.			
selection of possib	le fittings, bla	nking plugs, silencers and			

<sup>1)</sup> The manifold sub-base for use with the vacuum block can only be ordered via the valve terminal configurator and therefore doesn't have a separate part number.

or on the website via the individual search terms:

Internet → connection technology, silencer, blanking plug

<sup>2)</sup> Code letter within the order code for a valve terminal configuration

- 🔰 - Valve width

to ISO 15407-2

- 18 mm
- 26 mm to ISO 5599-2
- 42 mm (ISO 1)
- 52 mm (ISO 2)



Voltage 24 V DC 110 V AC



Flow rate
Width 18 mm:
up to 600 l/min
Width 26 mm:
up to 1200 l/min
Width 42 mm:
up to 1500 l/min
Width 52 mm
up to 3400 l/min

General technical data							
Design		Piston spool valve					
Sealing principle		Soft					
Actuation type		Electrical					
Type of control		Piloted					
Exhaust function, can be throttle	d	Via individual sub-base					
Lubrication		Lifetime lubrication					
Type of mounting							
<ul> <li>Valve</li> </ul>		Screwed onto sub-base					
<ul> <li>Individual sub-base</li> </ul>		Screwed via through-hole					
Mounting position		Any					
Manual override		Detenting, non-detenting, concealed					
Pneumatic connections – NPT thr	ead						
Width		18 mm	26 mm	42 mm	52 mm		
Pneumatic connection		Via E-box	Via E-box				
Supply port	1	1/8 NPT	1/4 NPT	3/8 NPT	1/2 NPT		
Exhaust port	3/5	1/8 NPT	1/4 NPT	3/8 NPT	1/2 NPT		
Working ports	2/4	1/8 NPT	1/4 NPT	3/8 NPT	1/2 NPT		
External pilot air supply port	14	10-32UNF-2B	1/8 NPT	1/8 NPT	1/8 NPT		
Pilot exhaust air port	12	10-32UNF-2B	1/8 NPT	1/8 NPT	1/8 NPT		

Operating and environment	al conditions								
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]							
Notes on operating/pilot med	dium	ricated operation possible (in which case lubricated operation will always be required)							
Operating pressure	[bar]	-0.9 +10							
	[MPa]	-0.09 +1							
Ambient temperature	[°C]	-5 +50							
Certification		c UL us - Recognized (OL)							
CE marking (see declaration of	of conformity)	In accordance with EU Low Voltage Directive (not for VABS-S4R3 and variants of width 52, VABS-S2-2S)							
Degree of protection		IP65, NEMA 4 (for all types of signal transmission when mounted)							

#### $\Big|\ Standard\ nominal\ flow\ rate\ of\ valve/individual\ sub-base\ [l/min]$

Valve function (with valve code)	Width 18 mm		Width 26 mm	
	Valve	Valve on individual sub-base	Valve	Valve on individual sub-base
5/2-way double solenoid (B52)	750	600	1400	1200
5/2-way double solenoid with dominant signal (D52)	750	600	1400	1200
5/2-way single solenoid, pneumatic spring (M52A)	750	600	1400	1200
5/2-way single solenoid, mechanical spring (M52M)	750	600	1400	1200
5/3-way closed (P53C)	700	550	1400 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way exhausted (P53E)	700 <sup>1)</sup> 330 <sup>2)</sup>	500 <sup>1)</sup> 330 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way pressurised (P53U)	700 <sup>1)</sup> 330 <sup>2)</sup>	500 <sup>1)</sup> 330 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way exhausted, switching position 14 detenting (P53ED)	-	390 <sup>1)</sup> 310 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way exhausted, switching position 12 detenting (P53EP)	-	390 <sup>1)</sup> 320 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	1200 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way, port 2 pressurised, 4 exhausted, switching position 14 detenting (P53AD)	-	380 <sup>1)</sup> 360 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>	700 <sup>1)</sup> 700 <sup>2)</sup>
5/3-way, port 4 pressurised, 2 exhausted, switching position 14 detenting (P53BD)	-	400	-	900 <sup>1)</sup> 840 <sup>2)</sup>
2x3/2-way single solenoid, closed (T32C)	600	500	1250	1100
2x3/2-way single solenoid, open (T32U)	600	500	1250	1100
2x3/2-way single solenoid, open/closed (T32H)	600	500	1250	1100
2x3/2-way single solenoid, closed (T32N)	600	500	1250	1100
2x3/2-way single solenoid, open (T32F)	600	500	1250	1100
2x3/2-way single solenoid, open/closed (T32W)	600	500	1250	1100
2x2/2-way single solenoid, closed (T22C)	700	500	1350	1100
2x2/2-way single solenoid, closed (T22CV)	700	500	1350	1100

Switching position
 Mid-position

#### Standard nominal flow rate of valve/individual sub-base [l/min]

Valve function (with valve code)	Width 42 mm		Width 52 mm	
	Valve	Valve on individual sub-base	Valve	Valve on individual sub-base
5/2-way double solenoid (B52)	2000	1500	4000	3400
5/2-way double solenoid with dominant signal (D52)	2000	1500	4000	3400
5/2-way single solenoid, pneumatic spring (M52A)	2000	1500	4000	3400
5/2-way single solenoid, mechanical spring (M52M)	2000	1500	4000	3400
5/3-way closed (P53C)	1900 <sup>1)</sup> 950 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	3200 <sup>1)</sup> 1700 <sup>2)</sup>
5/3-way exhausted (P53E)	1900 <sup>1)</sup> 950 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	3200 <sup>1)</sup> 1700 <sup>2)</sup>
5/3-way pressurised (P53U)	1900 <sup>1)</sup> 950 <sup>2)</sup>	1400 <sup>1)</sup> 800 <sup>2)</sup>	3600 <sup>1)</sup> 1700 <sup>2)</sup>	3200 <sup>1)</sup> 1700 <sup>2)</sup>
5/3-way, 1 to 2 pressurised, 4 to 5 closed (P53F) <sup>3)</sup>	1700 <sup>1)</sup> 700 <sup>2)</sup>	1400 <sup>1)</sup> 700 <sup>2)</sup>	3000 <sup>1)</sup> 900 <sup>2)</sup>	2600 <sup>1)</sup> 900 <sup>2)</sup>
2x3/2-way single solenoid, closed (T32C)	1600	1200	3000	2600
2x3/2-way single solenoid, open (T32U)	1600	1200	3000	2600
2x3/2-way single solenoid, open/closed (T32H)	1600	1200	3000	2600
2x3/2-way single solenoid, closed (T32N)	1600	1200	3000	2600
2x3/2-way single solenoid, open (T32F)	1600	1200	3000	2600
2x3/2-way single solenoid, open/closed (T32W)	1600	1200	3000	2600
2x2/2-way single solenoid, closed (T22C)	1600	1400	4000	3400
2x2/2-way single solenoid, closed (T22CV)	1600	1400	_	-

<sup>1)</sup> Switching position

<sup>3)</sup> The valve function P53F is only available in the 24 V DC version. Values only apply to 24 V DC.

Electrical data, individual su	ub-base	
Current rating at 40 °C	[A]	2 (1 A per coil)
Degree of protection to EN 60	)529	IP65, NEMA 4 (for all types of signal transmission when mounted)
Variants with cable connecto	r	
Operating voltage range	[V DC]	24 ±10% (for variants with cable terminal VABSK1/C1,K2)
	[V AC]	110 ±10% (50 60Hz) (for variants with cable and spring-loaded terminal VABSK1/C1,K2)
Surge resistance	[kV]	4
Pollution degree		3
Duty cycle	[ED]	100%



A cable connector is needed to ensure the IP degree of protection and to protect against tensile load, twisting and bending.

<sup>2)</sup> Mid-position

Materials				
Width	18 mm	26 mm	42 mm	52 mm
Sub-base	Die-cast aluminium			Gravity die-cast aluminium
Valve	Die-cast aluminium, PA			·
Seals	FPM, NBR			
Note on materials	RoHS-compliant			

Product weight [g]				
Width	18 mm	26 mm	42 mm	52 mm
Valves				
5/2-way solenoid valve, Double solenoid	172	276	439	732
5/2-way valve, single solenoid	163	293	426	702
5/3-way solenoid valve (P53C, P53E, P53U)	191	320	456	780
5/3-way solenoid valve (P53BD)	172	301	-	-
5/3-way solenoid valve (P53ED, P53EP)	170	291	-	-
5/3-way solenoid valve (P53AD)	172	301	-	-
5/3-way solenoid valve (P53F)	-	-	456	780
2x 3/2-way solenoid valve	190	335	442	740
2x 2/2-way solenoid valve	190	335	442	740
Individual connection				
Individual sub-base	192	302	386	815

B5

# Download CAD data → www.festo.com Individual sub-base with cable terminals, width 18 mm B1 B2 H1 H2 H3 H4 H3

Type B1	B2	В3	B5	D1	D2	D3	D4	D5 Ø	H1	H2	Н3	H4	H5	Н6	H7
VABS-S4-2S-N18-K2 <sup>1)</sup> VABS-S4-2S-N18-B-K2 <sup>2)</sup> 32.4	30	18	6	1/8 NPT	10-32UNF-2B	10-32UNF-2B	M20x1.5	5.5	31	53.4	14.5	13	13.7	8.8	4

Туре		L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S4-	2S-N18-K2 <sup>1)</sup>	133.5	124.5	38.6	22.2	32.4	33.2	16.6	25.3	16.2	4.5
VABS-S4-	2S-N18-B-K2 <sup>2)</sup>										

<sup>1)</sup> External pilot air supply

Internal pilot air supply

# 

Туре	B1	В3	B5	D1	D2	D3	D4	D5 Ø	H1	H2	H3	H4	H5	Н6	H7
VABS-S4-1S-G14-K2 <sup>1)</sup>	43	26	8.5	1/4 NPT	1/8 NPT	1/8 NPT	M20x1.5	5.5	36.5	53.5	26.5	13	13	12.5	4
VABS-S4-1S-G14-B-K2 <sup>2)</sup>						_									

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S4-1S-G14-K2 <sup>1)</sup>	150.6	141.5	53.6	23.2	41.4	37.9	24.2	29.3	20.7	4.5
VABS-S4-1S-G14-B-K2 <sup>2)</sup>										

<sup>1)</sup> External pilot air supply

<sup>2)</sup> Internal pilot air supply

# 

Туре	B1	В3	B5	B6	D1	D2	D3	D4	D5 Ø	H1	H2	Н3	H4	H5	Н6	H7	Н8
VABS-S2-1S-N38-K1 <sup>1)</sup>	50	42	4	2.2	3/8 NPT	1/8 NPT	1/8 NPT	M20x1.5	5.5	42.5	55.3	29	13.6	17.1	16.3	4	47.5
VABS-S2-1S-N38-C1 1)	1																
VABS-S2-1S-N38-B-K1 <sup>2)</sup>							_										
VABS-S2-1S-N38-B-C1 <sup>2)</sup>																	

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S2-1S-N38-K1 <sup>1)</sup>	150.6	141.5	53.6	23.2	44	37	26	28	22	4.5
VABS-S2-1S-N38-C1 1)										
VABS-S2-1S-N38-B-K1 <sup>2)</sup>	]									
VABS-S2-1S-N38-B-C1 <sup>2)</sup>	]									

<sup>1)</sup> External pilot air supply

186

Internal pilot air supply

 $<sup>| \</sup>label{eq:Note:This product conforms to ISO 1179-1 and ISO 228-1.}$ 

# Dimensions Download CAD data → www.festo.com Individual sub-base with M12 plug, width 52 mm Н8 В4 В1 H1 H2 Ф Ð 8 $\oplus$ 7 L9 $\oplus$ $\oplus$ 9 Н6 H5 H4 ш <u>B5</u> [1] Plug to EN 61076-2-101

Туре	B1	В3	B5	B6	D1	D2	D3	D4	D5 Ø	H1	H2	НЗ	H4	H5	Н6	H7	Н8
VABS-S2-2S-N12-K1 <sup>1)</sup>	67	52	7.5	2.2	1/2 NPT	1/8 NPT	1/8 NPT	M20x1.5	6.5	60	60	43.5	17	26.5	23.5	10	65
VABS-S2-2S-N12-C1 <sup>1)</sup>																	
VABS-S2-2S-N12-B-K1 <sup>2)</sup>							_										
VABS-S2-2S-N12-B-C1 2)																	

Туре	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABS-S2-2S-N12-K1 <sup>1)</sup>	185	172	17.5	17.5	55.4	99.5	33	88.3	27.7	6.5
VABS-S2-2S-N12-C1 <sup>1)</sup>										
VABS-S2-2S-N12-B-K1 <sup>2)</sup>										
VABS-S2-2S-N12-B-C1 <sup>2)</sup>										

<sup>1)</sup> External pilot air supply

<sup>2)</sup> Internal pilot air supply

<sup>♦</sup> Note: This product conforms to ISO 1179-1 and ISO 228-1.

# Valve terminal VTSA/VTSA-F, NPT

# Accessories – Individual connection

	Description		Width	Part no.	Туре
dividual sub-bas	se, electrical connection via cable terminals				
	Internal pilot air supply	1/8 NPT connections	18 mm	541068	VABS-S4-2S-N18-B-K2
16000		1/4 NPT connections	26 mm	541066	VABS-S4-1S-N14-B-K2
	External pilot air supply	1/8 NPT connections	18 mm	539724	VABS-S4-2S-N18-K2
		1/4 NPT connections	26 mm	539726	VABS-S4-1S-N14-K2
lividual sub-bas	se, electrical connection via spring-loaded te	rminal			
	Internal pilot air supply	3/8 NPT connections	42 mm	546763	VABS-S2-1S-N38-B-C1
100.		1/2 NPT connections	52 mm	555644	VABS-S2-2S-N12-B-C1
16.00	External pilot air supply	3/8 NPT connections	42 mm	546761	VABS-S2-1S-N38-C1
		1/2 NPT connections	52 mm	555639	VABS-S2-2S-N12-C1
ividual sub-bas	se, electrical connection via cable (open end)	-			
	Internal pilot air supply	3/8 NPT connections	42 mm	546103	VABS-S2-1S-N38-B-K
16000		1/2 NPT connections	52 mm	555642	VABS-S2-2S-N12-B-K1
	External pilot air supply	3/8 NPT connections	42 mm	546100	VABS-S2-1S-N38-K1
		1/2 NPT connections	52 mm	555637	VABS-S2-2S-N12-K1

# Accessories

Ordering data			1	1	1 .
	Description		Part no.	Туре	PU <sup>1)</sup>
Multi-pin plug dist	tributor				
	15-pin Sub-D socket/8x 3-pin M8 plugs		177669	MPV-E/A08-M8	1
	15-pin Sub-D socket/12x 3-pin M8 plugs		177670	MPV-E/A12-M8	1
Push-in fitting					
	Connecting thread 1/4 NPT for tubing O.D.	1/2"	567771	QB-1/4-1/2-U	10
		3/8"	533278	QB-1/4-3/8-U	10
		5/16"	533277	QB-1/4-5/16-U	10
	Connecting thread 1/8 NPT for tubing O.D.	3/8"	567773	QB-1/8-3/8-U	10
•		1/4"	533273	QB-1/8-1/4-U	10
		5/16"	533274	QB-1/8-5/16-U	10
	Connecting thread 3/8 NPT for tubing O.D.	1/2"	533282	QB-3/8-1/2-U	5
		3/8"	533281	QB-3/8-3/8-U	5
	Connecting thread 1/2 NPT for tubing O.D.	5/8"	190682	QS-1/2-5/8-U	1
		1/2"	533284	QB-1/2-1/2-U	5
Barbed hose fitting	3	1			'
^^	For right end plate (connecting thread NPT)	3/4"	564848	N-3/4-P-19-NPT	1
		R1	572243	N-1-P-19-NPT	1
	For adapter plate (connecting thread NPT)	R1	572243	N-1-P-19-NPT	1

<sup>1)</sup> Packaging unit

# Valve terminal VTSA/VTSA-F, NPT

# Accessories

Ordering data						
	Code	Description		Part no.	Туре	PU <sup>1)</sup>
Silencer						
	U	Standard design, connecting thread NPT	1/8"	12638	U-1/8-B-NPT	1
			1/4"	12639	U-1/4B-NPT	1
9			1/2"	12741	U-1/2-B-NPT	1
			3/4"	566823	U-3/4-B-NPT	1
			1"	571280	U-1-B-NPT	1
	А	Sintered design, connecting thread NPT	1/8"	1206989	AMTE-M-LH-N18	20
			1/4"	1206990	AMTE-M-LH-N14	20
			1/2"	1206992	AMTE-M-LH-N12	10
Blanking plug						
	-	Connecting thread NPT	1/8"	173985	B-1/8-NPT	1
			1/4"	174165	B-1/4-NPT	1
•			1/2"	31785	B-1/2-NPT	1
			3/4"	31786	B-3/4-NPT	1
			1"	31787	B-1-NPT	1
Other pneumatic	connection acc	accoriac				
		planking plugs and silencers can be found				
on the website via	_					
		ogy, silencer, blanking plug				

<sup>1)</sup> Packaging unit