

Proportional-pressure regulator VPPM

FESTO



Characteristics

At a glance

Innovative:

- Multi-sensor control (cascade control)
- Diagnostics
- Choice of control characteristics
- Temperature-compensated
- High dynamic response
- High repetition accuracy
- Modular system processing
- IO-Link® for direct connection to a higher-order IO-Link®/I-Port master

Flexible:

- Individual valves (inline valve)
- Sub-base valves (manifold/flanged valve)
- Various user interfaces: LED displays, LCD display, setting/selection buttons
- Choice of valves with different pressure ranges
- Pressure range can be modified at the valve
- Choice of different setpoint specifications: current input; voltage input

Operationally safe:

- Integrated pressure sensor with separate output
- Cable break monitoring
- Pressure is maintained if the controller fails

Easy to assemble:

- Manifold block (manifold)
- H-rail mounting
- Individually with mounting bracket
- QS fittings

Layout of a control loop (layout):

- The reference variable w (setpoint value e.g. 5 volts or 8 milliamperes) first acts on a comparator. The measuring equipment sends the value of the controlled variable x (actual value e.g. 3 bar) to the comparator as feedback variable r . The control element detects the control difference e and controls the final control element. The output of the final control element acts on the system. The control element thus attempts to compensate for the difference between the reference variable w and the controlled variable x by using the final control element.

Operating principle:


- This process runs continuously so changes in the reference variable are always detected. However, a system deviation will also occur if the reference variable is constant and the controlled variable changes. This happens when there is a change in the flow rate through the valve, caused by a switching operation, a cylinder movement or a load change. The disturbance variable z also causes a control difference, such as, for example, a pressure drop in the air supply. The disturbance variable z has an unintended effect on the controlled variable x . The controller always tries to re-adjust the controlled variable x to the reference variable w .

Multi-sensor control (cascade control) of the VPPM:

- Unlike conventional direct-acting control systems, in multi-sensor control several control loops are nested inside one another. The overall controlled system is thus divided into smaller sections that are easier to control for specific tasks.


Valve function

[3] 3-way proportional-pressure regulator, closed



Characteristics

Ordering data - modular system



Configurable product

This product and all its product options can be ordered online via the configurator.

Diagrams

Link [vppm](#)



The diagrams shown in this document are also available online. These can be used to display precise values.

Type code

001	Series	
VPPM	Proportional pressure regulator, modular	
002	Nominal width [mm]	
6	6	
8	8	
12	12	
003	Directional control valve type	
L	In-line valve	
F	Flanged valve	
T	Flanged valve for valve terminal	
004	Mounting method	
	Standard	
A	Valve terminal MPA	
005	Dynamic response	
L	Low	
006	Valve function	
1	3/2-way valve, normally closed	
007	Pneumatic connection	
F	Flange/sub-base	
G18	G1/8	
G14	G1/4	
G12	G1/2	
008	Lower pressure value of control range	
0L	0 bar	

009	Upper pressure value of control range	
2H	2 bar	
6H	6 bar	
10H	10 bar	
010	Alternative lower pressure regulation range	
...L	0 ... 9 bar	
011	Alternative upper pressure regulation range	
...H	0.2 ... 10 bar	
012	Setpoint input for individual valves	
	For valve terminals/servo-pneumatics	
A4	4 ... 20 mA	
LK	IO-Link®	
V1	0 ... 10 V	
013	Switching input/output	
	None	
N	NPN	
P	PNP	
014	Overall accuracy	
	2%	
S1	1 %	
015	Operator unit/interface	
	None	
C1	With LCD, variable pressure unit	

Datasheet

Analogue interface, general technical data

Pneumatic connection, port 1	Sub-base							G1/8			G1/4		G1/2	
Nominal size, supply	6 mm			8 mm				6 mm			8 mm		12 mm	
Nominal size, exhaust	4.5 mm			7 mm				4.5 mm			7 mm		12 mm	
Standard nominal flow rate (standardised to DIN 1343)	380 l/min	900 l/min	1,400 l/min	450 l/min	1,050 l/min	1,650 l/min	1,750 l/min	380 l/min	900 l/min	1,400 l/min	1,750 l/min	2,750 l/min	4,500 l/min	7,000 l/min
Valve function	3-way proportional pressure regulator													
Design	Piloted diaphragm regulator													
Sealing principle	Soft													
Type of actuation	Electric													
Type of piloting	Pilot actuated													
Type of reset	Mechanical spring													
Type of mounting	Either:, With through-hole, With accessories													
Mounting position	optional													
Product weight	400 g			560 g				400 g			560 g		2,050 g	

Analogue interface, electrical data

Pneumatic connection, port 1	Sub-base		G1/8	G1/4	G1/2
Electrical connection	8-pin, M12, Plugs	Via sub-base	8-pin, M12, Plugs		
Operational voltage range DC	21.6 ... 26.4 V				
Residual ripple	10%				
Duty cycle	100%				
Max. electrical power consumption	7 W				12 W
Setpoint value input	–				
Short circuit current rating	For all electrical connections				
Reverse polarity protection	For all electrical connections				
Degree of protection	IP65				
Signal range analogue input	0 - 10 V 4 - 20 mA	–	0 - 10 V 4 - 20 mA		
Signal range analogue output	0 - 10 V 4 - 20 mA	–	0 - 10 V 4 - 20 mA		

Datasheet

Analogue interface, operating and environmental conditions			
Pressure regulation range	0.01 ... 1 MPa	0.002 ... 0.2 MPa	0.006 ... 0.6 MPa
Pressure regulation range	0.1 ... 10 bar	0.02 ... 2 bar	0.06 ... 6 bar
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases		
Note on operating and pilot medium	Lubricated operation not possible		
Inlet pressure 1 ¹⁾	0 ... 1.1 MPa	0 ... 0.4 MPa	0 ... 0.8 MPa
Inlet pressure 1 ²⁾	0 ... 11 bar	0 ... 4 bar	0 ... 8 bar
Hysteresis	0.5 %FS		
Linearity	1 %FS		
Linearity error in ± %FS	–		
Reproducibility	0.5 %FS		
Total accuracy	1.25%FS, 2.25%FS		
Repetition accuracy FS	0.5%		
Temperature coefficient	0.04 %/K		
Ambient temperature	0 ... 60°C		
Media temperature	10 ... 50°C		
Note on materials	RoHS-compliant		
LABS (PWIS) conformity	VDMA24364-B1/B2-L		
Corrosion resistance class CRC ³⁾	2 - Moderate corrosion stress		
CE mark (see declaration of conformity) ⁴⁾	To EU EMC Directive In accordance with EU RoHS Directive		
UKCA marking (see declaration of conformity) ⁵⁾	To UK instructions for EMC To UK RoHS instructions		
Approval	RCM trademark c UL us listed (OL)		
Certificate issuing authority	UL E322346		

1) The input pressure 1 should always be 1 bar greater than the maximum regulated outlet pressure.

2) The input pressure 1 should always be 1 bar greater than the maximum regulated outlet pressure.

3) More information www.festo.com/x/topic/crc

4) For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/...d/Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

5) For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/...d/Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Analogue interface, materials

Material housing	Wrought aluminium alloy, Anodised
Material membrane	–

IO-Link® interface, general technical data

Pneumatic connection, port 1	Sub-base						G1/8			G1/4			G1/2		
Nominal size, supply	6 mm			8 mm			6 mm			8 mm			12 mm		
Nominal size, exhaust	4.5 mm			7 mm			4.5 mm			7 mm			12 mm		
Standard nominal flow rate (standardised to DIN 1343)	380 l/min	900 l/min	1,400 l/min	450 l/min	1,050 l/min	1,650 l/min	380 l/min	900 l/min	1,400 l/min	650 l/min	1,750 l/min	2,750 l/min	1,900 l/min	4,500 l/min	7,000 l/min
Valve function	3-way proportional pressure regulator														
Design	Piloted diaphragm regulator														
Sealing principle	Soft														
Type of actuation	Electric														
Type of piloting	Pilot actuated														
Type of reset	Mechanical spring														
Type of mounting	Either:, With through-hole, With accessories														
Mounting position	optional														
Product weight	400 g			560 g			400 g			560 g			2,050 g		
IO-Link, Protocol version	Device V 1.1														
IO-Link, Process data length OUT	2 bytes														
IO-Link, Process data length IN	2 bytes														
IO-Link, communication mode	COM1 (4.8 kB), COM2 (38.4 kB), COM3 (230.4 kB)														
IO-Link, Min. cycle time	0.5 ms														

Datasheet

IO-Link® interface, operating and environmental conditions

Pressure regulation range	0.01 ... 1 MPa	0.002 ... 0.2 MPa	0.006 ... 0.6 MPa
Pressure regulation range	0.1 ... 10 bar	0.02 ... 2 bar	0.06 ... 6 bar
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases		
Note on operating and pilot medium	Lubricated operation not possible		
Inlet pressure 1	0 ... 1.1 MPa	0 ... 0.4 MPa	0 ... 0.8 MPa
Inlet pressure 1	0 ... 11 bar	0 ... 4 bar	0 ... 8 bar
Max. pressure hysteresis	0.05 bar	0.01 bar	0.03 bar
Hysteresis	0.5 %FS		
Linearity	1 %FS		
Linearity error in ± %FS	–		
Reproducibility	0.5 %FS		
Total accuracy	1.25%FS		
Repetition accuracy FS	0.5%		
Temperature coefficient	0.04 %/K		
Ambient temperature	0 ... 60°C		
Media temperature	10 ... 50°C		
Note on materials	RoHS-compliant		
LABS (PWIS) conformity	VDMA24364-B1/B2-L		
Corrosion resistance class CRC ¹⁾	2 - Moderate corrosion stress		
CE mark (see declaration of conformity) ²⁾	To EU EMC Directive In accordance with EU RoHS Directive		
UKCA marking (see declaration of conformity) ³⁾	To UK instructions for EMC To UK RoHS instructions		
Approval	RCM trademark c UL us listed (OL)		
Certificate issuing authority	UL E322346		

1) More information www.festo.com/x/topic/crc

2) For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/...d/Support/Downloads.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

3) For information about the area of use, see the declaration of conformity at: www.festo.com/catalogue/...d/Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


IO-Link® interface, materials

Material housing	Wrought aluminium alloy, Anodised
------------------	-----------------------------------

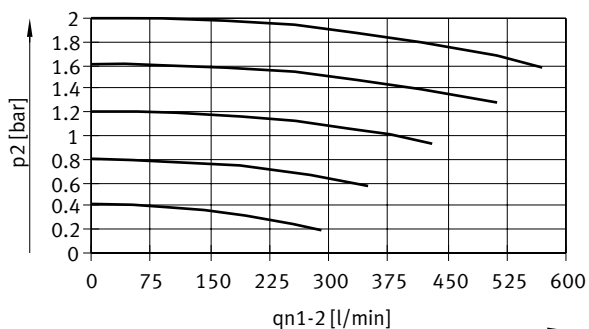
Flow rate q_{n1-2} from 1 -> 2 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L2H-... (2 bar)

Datasheet


Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L6H-... (6 bar)

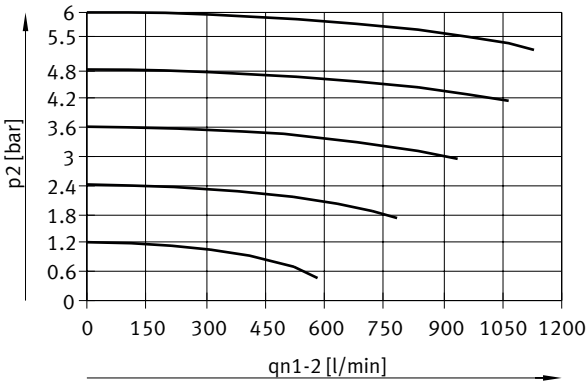



Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L10H-... (10 bar)

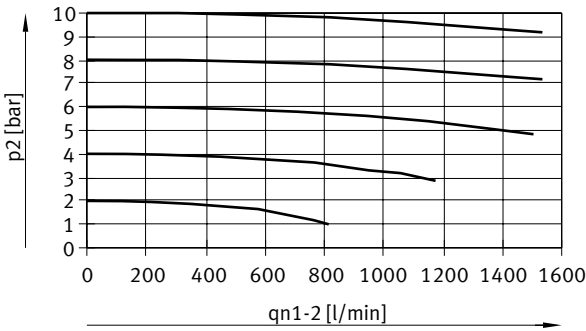

Flow rate q_n from 2 -> 3 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L2H-... (2 bar)

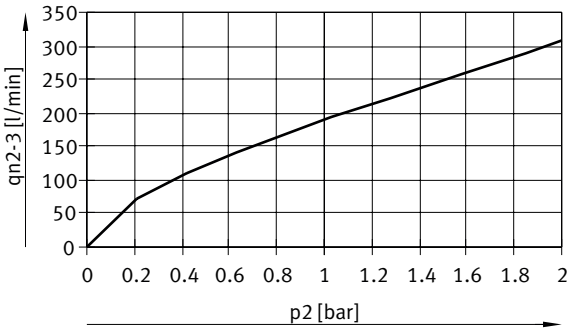


Datasheet

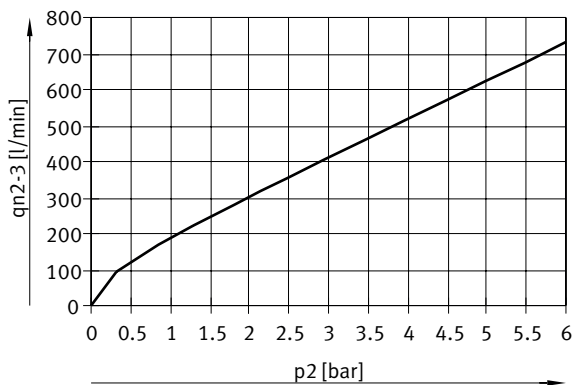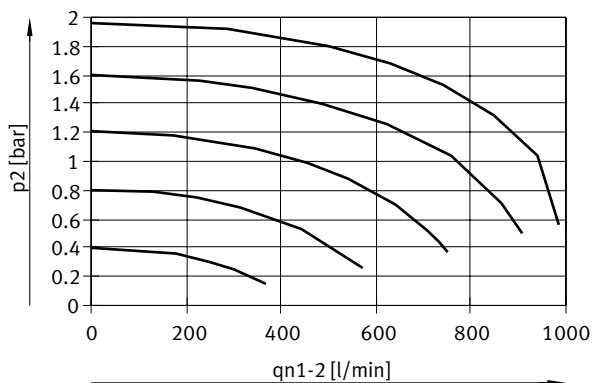
Flow rate q_n from 2 -> 3 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L6H-... (6 bar)Flow rate q_n from 2 -> 3 as a function of excess output pressure p_2 , VPPM-6L/F-...-0L10H-... (10 bar)Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-8L/F-...-0L2H-... (2 bar)

Datasheet


Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-8L/F-...-0L6H-... (6 bar)

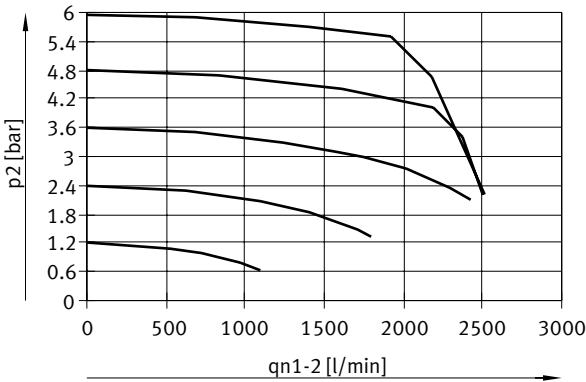




Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-8L/F-...-0L10H-... (10 bar)

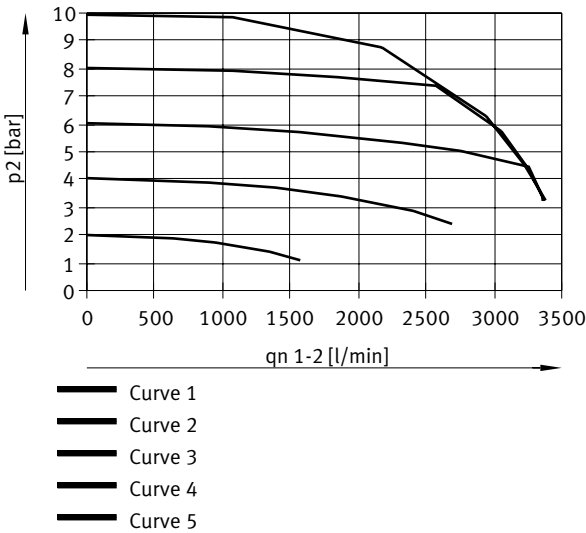

Flow rate q_n from 2 -> 3 as a function of excess output pressure p_2 , VPPM-8L/F-...-0L2H-... (2 bar)

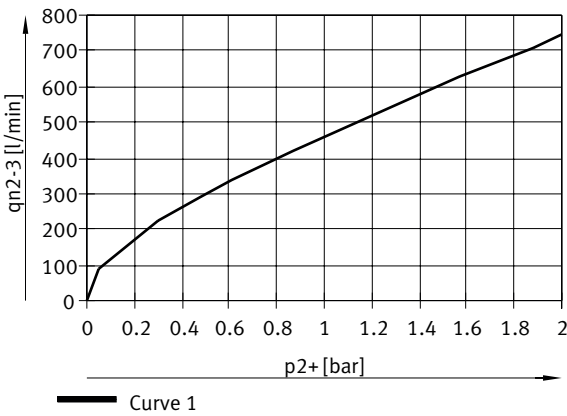


Datasheet

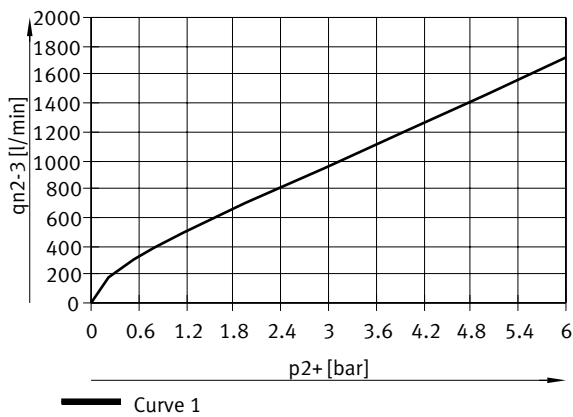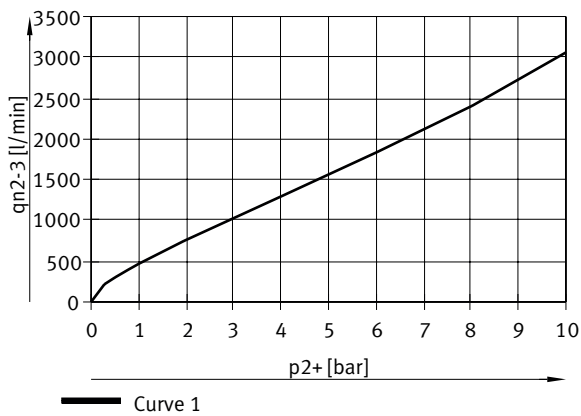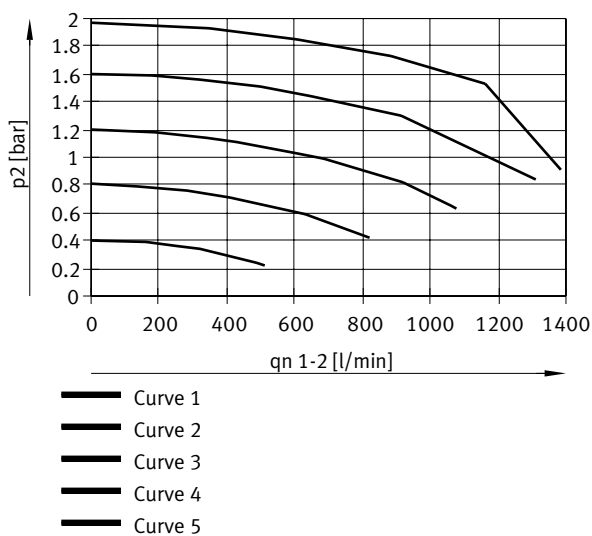
Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_{2+} , VPPM-8L/F-...-0L6H-... (6 bar)Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_{2+} , VPPM-8L/F-...-0L10H-... (10 bar)Flow rate q_{n1-2} from 1 -> 2 as a function of excess output pressure p_{2+} , VPPM-8F/8TA-...-0L2H-... (2 bar)

Datasheet


Flow rate qn from 1 -> 2 as a function of excess output pressure p2, VPPM-8F/8TA-...-0L6H-... (6 bar)

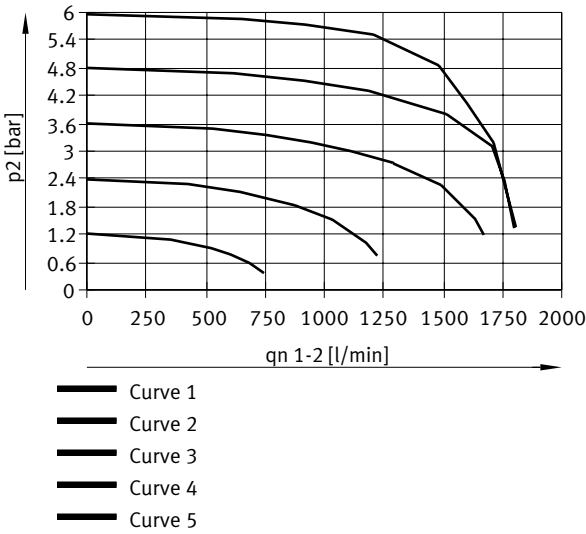




Flow rate qn from 1 -> 2 as a function of excess output pressure p2, VPPM-8F/8TA-...-0L10H-... (10 bar)

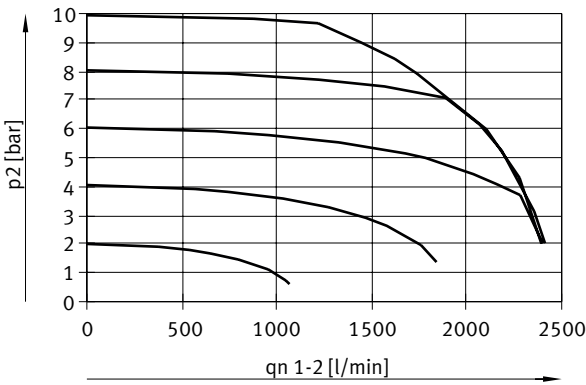

Flow rate qn from 2 -> 3 as a function of excess output pressure p2, VPPM-8F/8TA-...-0L2H-... (2 bar)

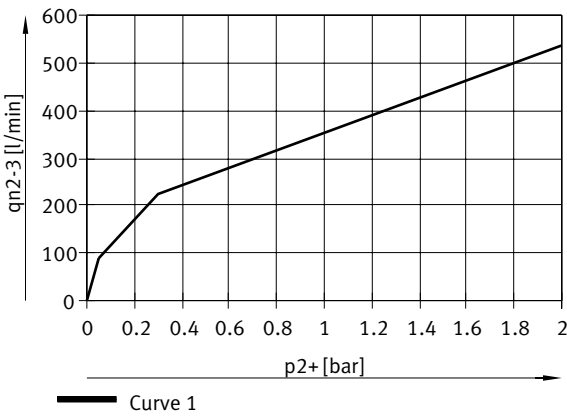


Datasheet

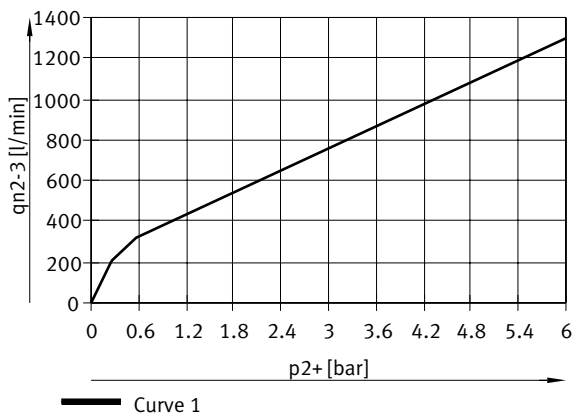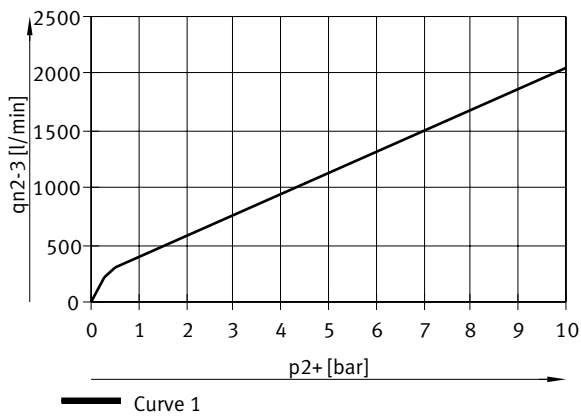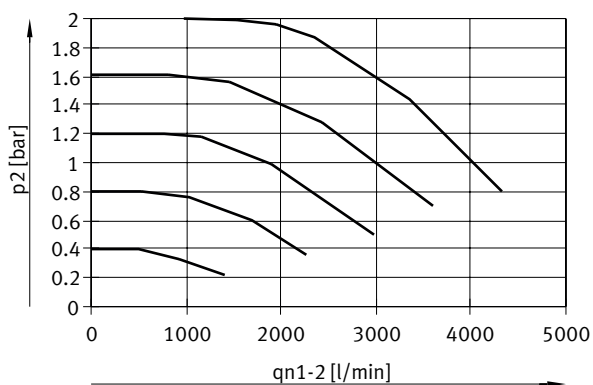
Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_{2+} , VPPM-8F/8TA-...-0L6H-... (6 bar)Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_{2+} , VPPM-8F/8TA-...-0L10H-... (10 bar)Flow rate q_{n1-2} from 1 -> 2 as a function of excess output pressure p_2 , VPPM-12L-...-0L2H-... (4 bar)

Datasheet


Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-12L-...-0L6H-... (8 bar)

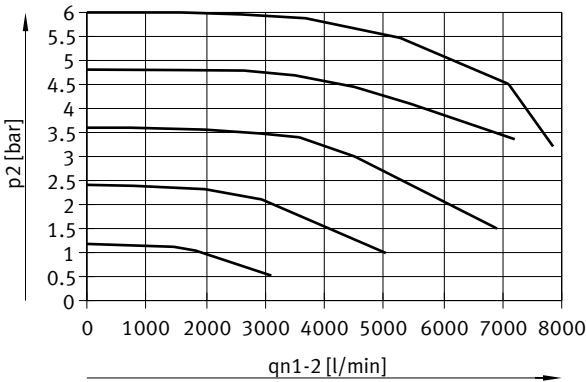

Flow rate q_n from 1 -> 2 as a function of excess output pressure p_2 , VPPM-12L-...-0L10H-... (11 bar)

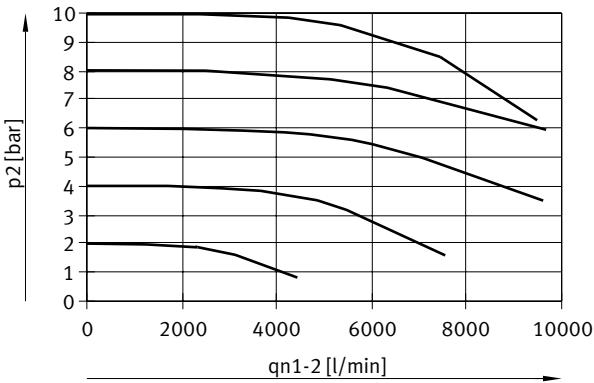


Flow rate q_n from 2 -> 3 as a function of excess output pressure p_2 , VPPM-12L-...-0L2H-... (4 bar)

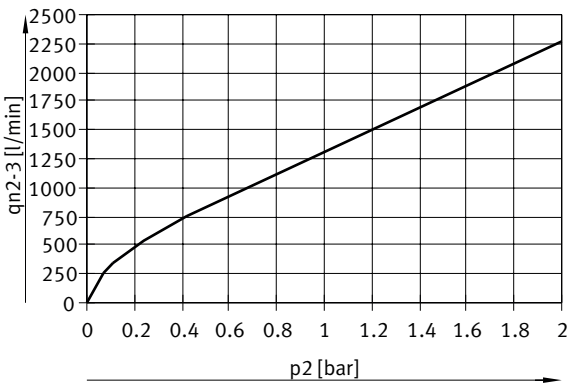


Datasheet

Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_2 , VPPM-12L-...-0L6H-... (8 bar)

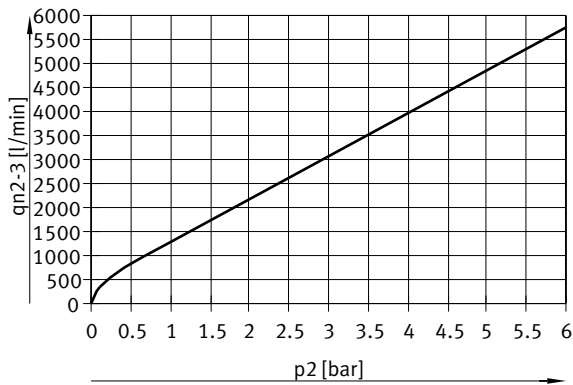


Flow rate q_{n2-3} from 2 -> 3 as a function of excess output pressure p_2 , VPPM-12L-...-0L10H-... (11 bar)

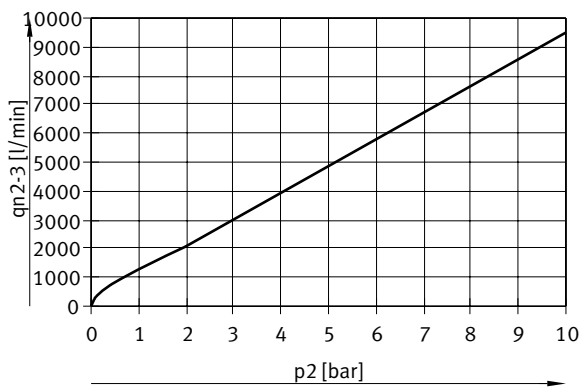

Dimensions

Dimensions – Analogue interface, VPPM-6F, sub-base valve Download CAD data www.festo.com

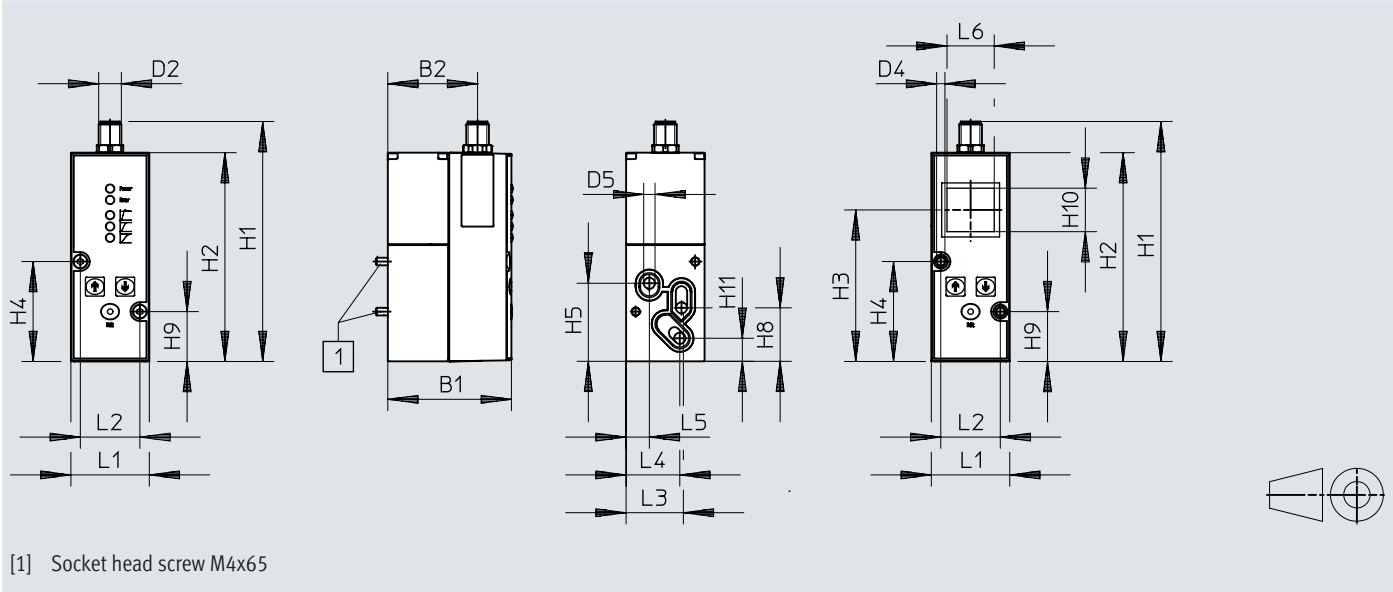


	B1	B2	D2 Ø	D4 Ø	D5 Ø	H1	H2	H3	H4	H5	H8	H9	H10	H11
VPPM-6F	65,4	47,5	M12x1	4,4	6	126,9	110,4	80,1	52,8	41,3	28,3	26,3	23	12,2

	L1	L2	L3	L4	L5	L6
VPPM-6F	41,5	31,5	30,3	28,4	12,3	25

Dimensions

Dimensions – Analogue interface, VPPM-6L- pneumatic connection G1/8

Download CAD data www.festo.com

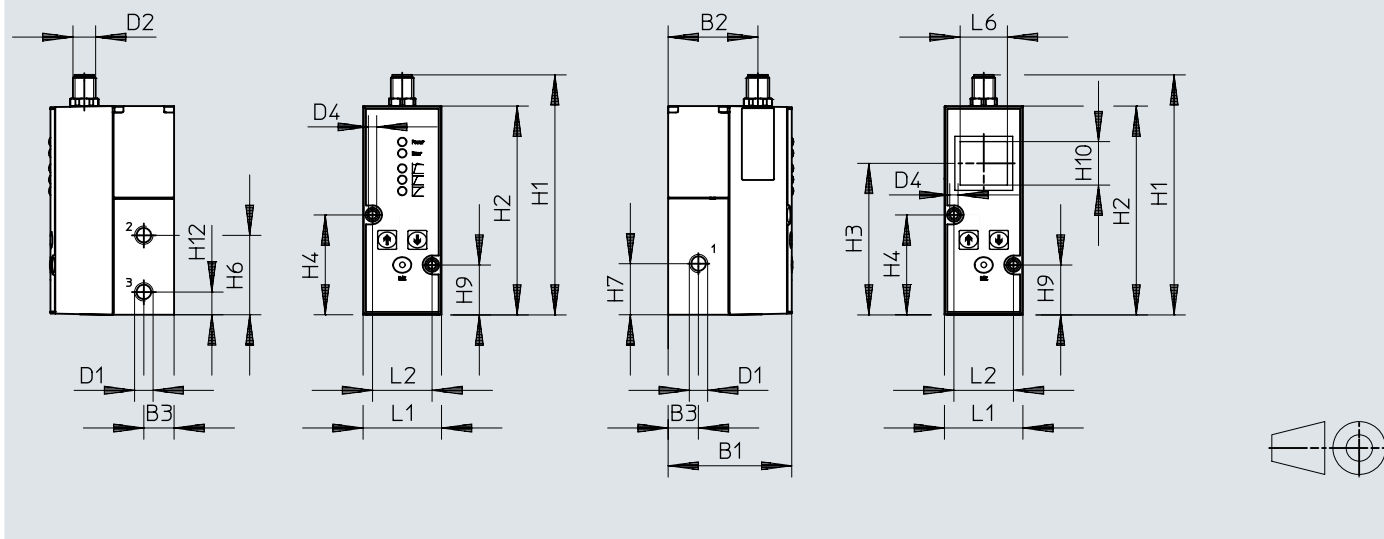


	B1	B2	B3	D1	D2	D4 Ø	H1	H2	H3	H4	H6	H7	H9	H10	H12
VPPM-6L	65,5	47,5	16	G1/8	M12x1	4,4	126,9	110,4	80,1	52,8	42	27	26,3	23	12

	L1	L2	L6
VPPM-6L	41,5	31,5	25

Dimensions

Dimensions – Analogue interface, VPPM-8F, sub-base valve Download CAD data www.festo.com

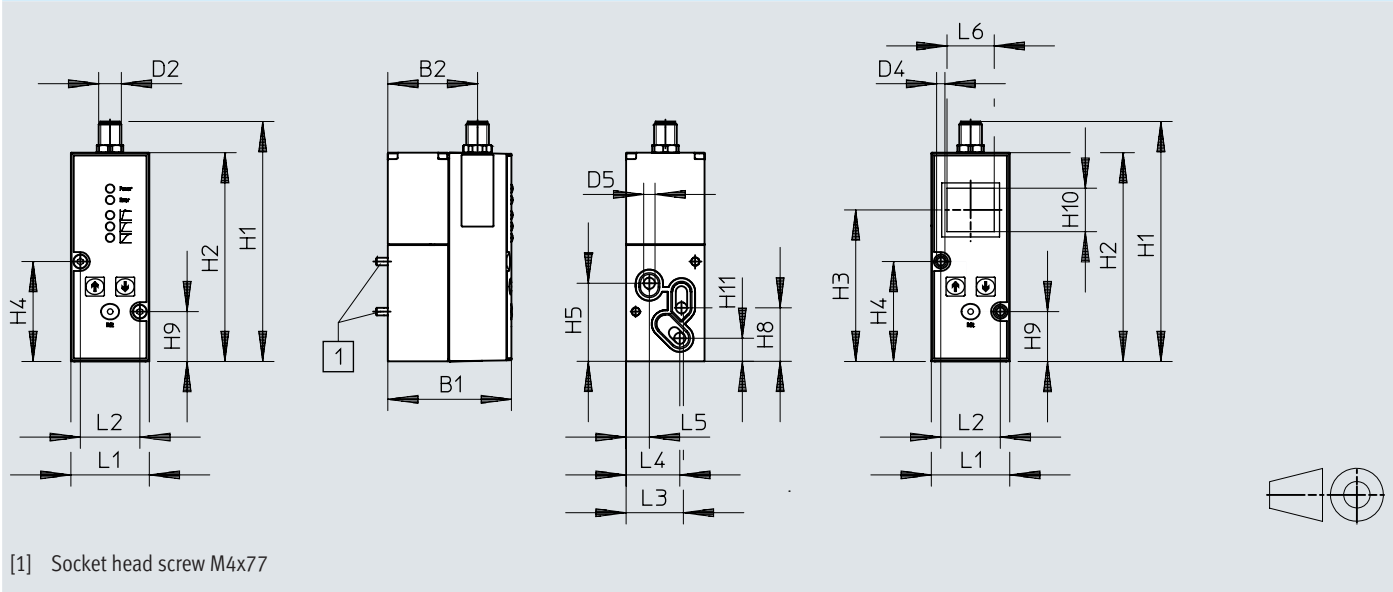


	B1	B2	D2	D5 ø	H1	H2	H3	H4	H5	H8	H9	H10	H11
VPPM-8F	77,4	59,5	M12x1	8	126,9	110,4	80	52,8	41,3	28,3	26,3	23	12,2

	L1	L2	L3	L4	L5	L6
VPPM-8F	41,5	31,5	29,3	28,4	12,3	25

Dimensions

Dimensions – Analogue interface, VPPM-8L, pneumatic connection G1/4

Download CAD data www.festo.com

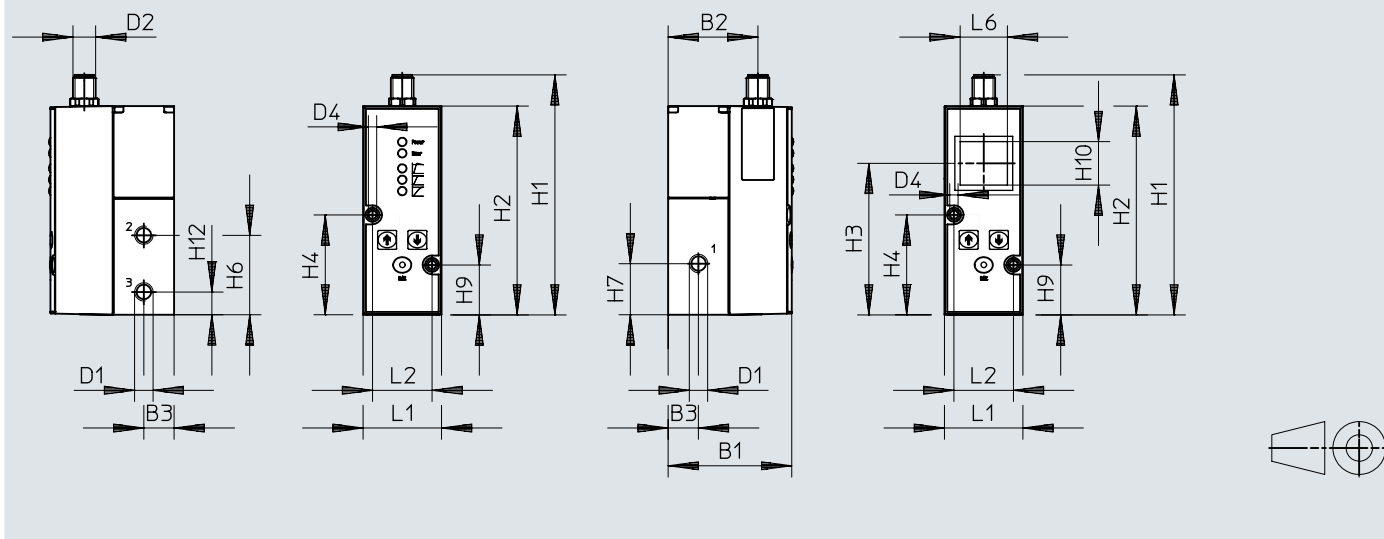


	B1	B2	B3	D1	D2	H1	H2	H3	H4	H6	H7	H9	H10	H12
VPPM-8L	77,4	59,5	22	G1/4	M12x1	126,9	110,4	80	52,8	42	27	26,3	23	12

	L1	L2	L6
VPPM-8L	47	31,5	25

Dimensions

Dimensions – Analogue interface, VPPM-6TA, sub-base valve Download CAD data www.festo.com

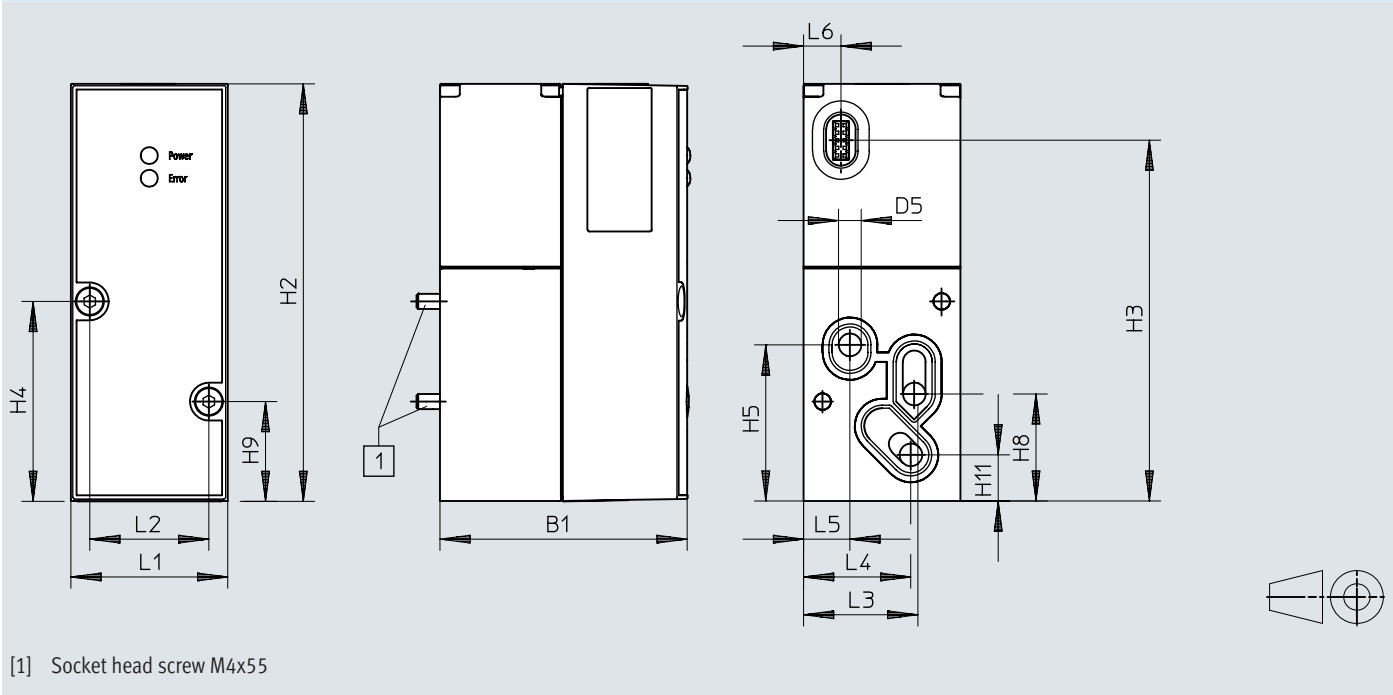


	B1	D5 ∅	H2	H3	H4	H5	H8	H9	H11
VPPM-6TA	55,1	6	110,4	95,5	52,8	41,3	28,3	26,3	12,2

	L1	L2	L3	L4	L5	L6
VPPM-6TA	41,5	31,5	30,3	28,4	12,3	9,9

Dimensions

Dimensions – Analogue interface, VPPM-8TA, sub-base valve with LCD

Download CAD data www.festo.com

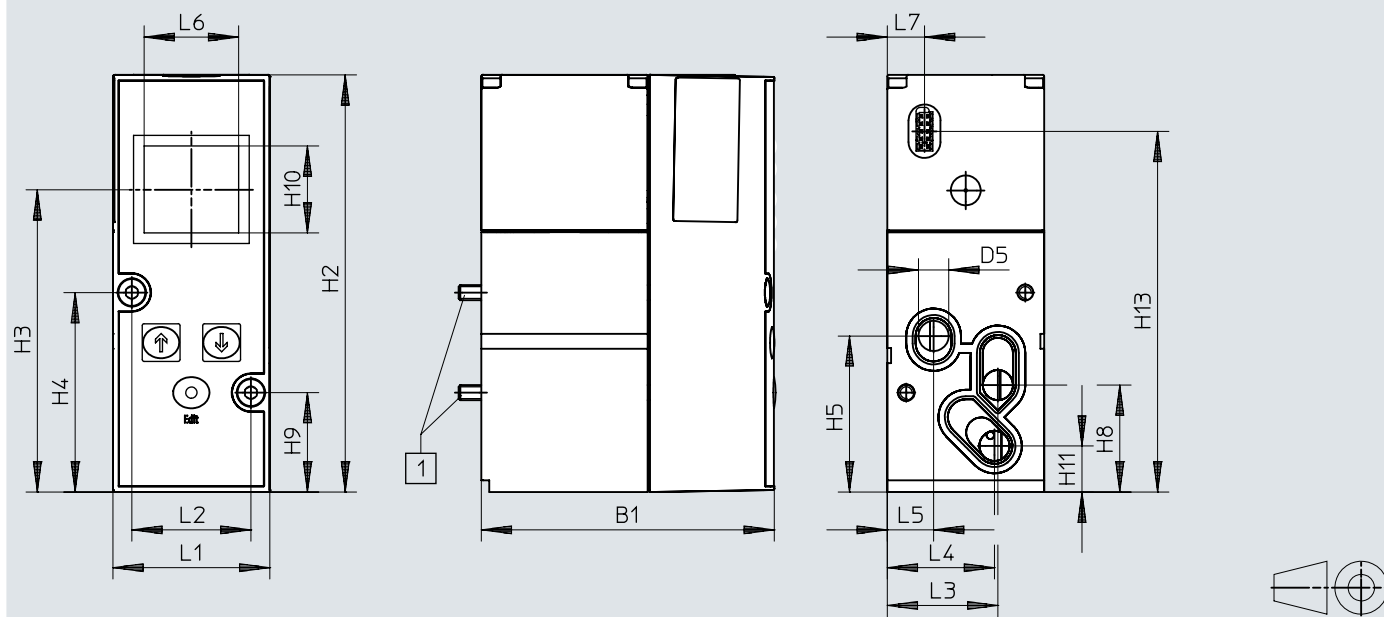


[1] Socket head screw M4x77

	B1	D5 ø	H2	H3	H4	H5	H8	H9	H10	H11	H13
VPPM-8TA	77,4	8	110,4	80	52,8	41,3	28,3	26,3	23	12,2	95,5

	L1	L2	L3	L4	L5	L6	L7
VPPM-8TA	41,5	31,5	29,3	28,4	12,3	25	9,9

Dimensions

Dimensions – Analogue interface, VPPM-12L, pneumatic connection G1/2 Download CAD data www.festo.com

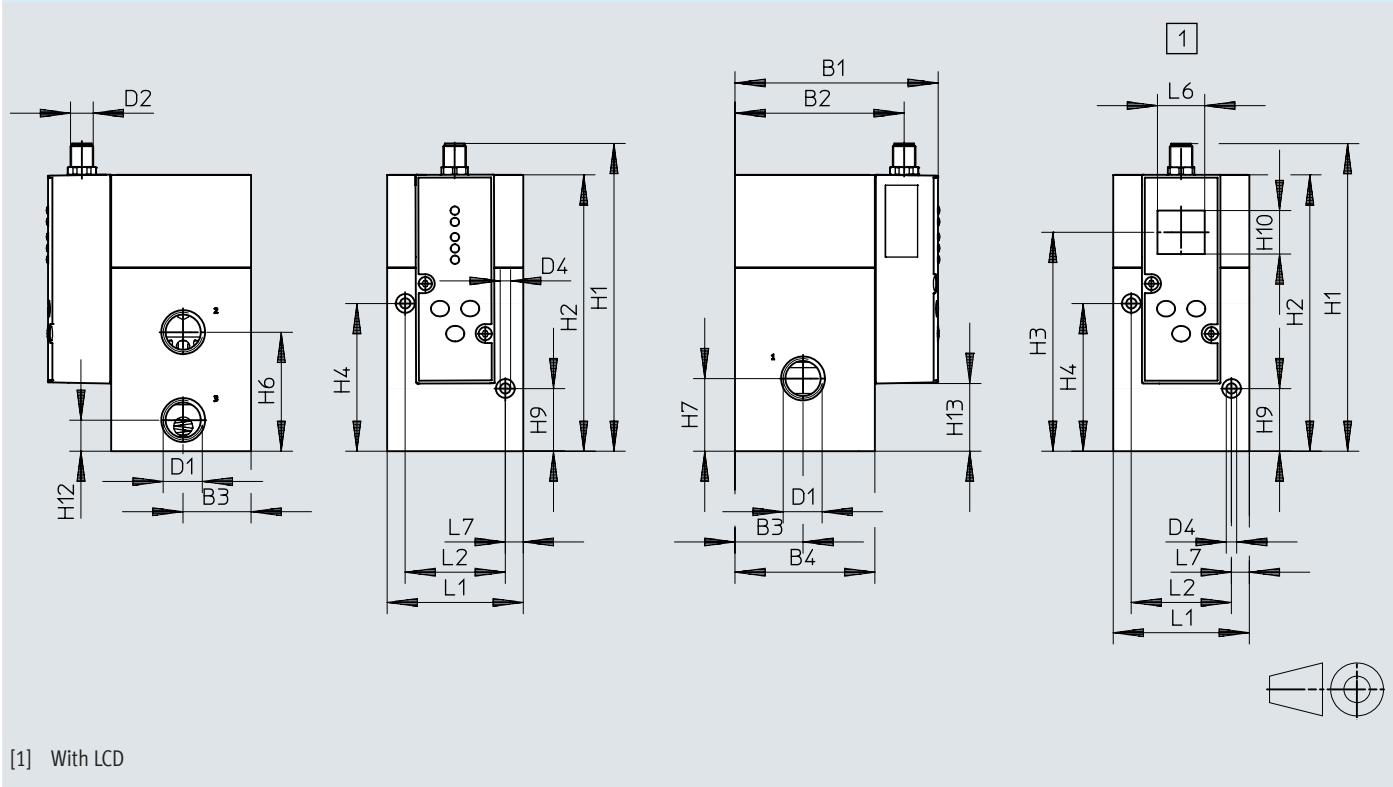


	B1	B2	B3	B4	D1	D2	D4	H1	H2	H3	H4	H6	H7	H9	H10	H12	H13
VPPM-12L	107,4	89,5	36	74	G1/2	M12x1	5,5	162,8	146,3	116	78,2	63	38,5	33,2	23	16,5	35,9

	L1				L2				L6				L7			
VPPM-12L	72				53				25				9,5			

Dimensions

Dimensions – IO-Link® interface, VPPM-6F, sub-base valve

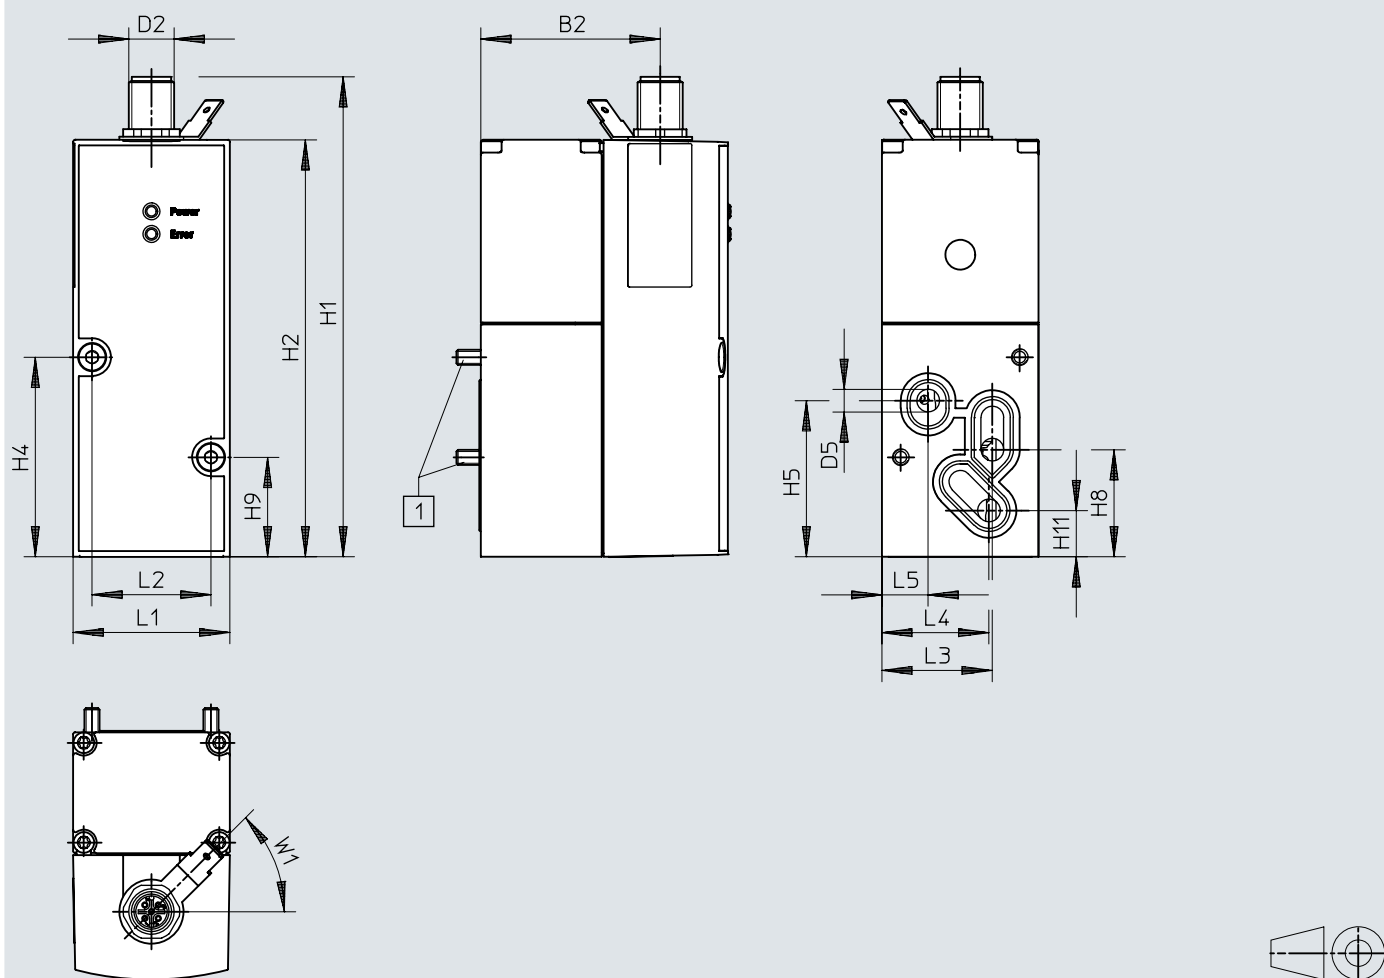Download CAD data www.festo.com


[1] Socket head screw M4x65

	B1	B2	D2 Ø	D5 Ø	H1	H2	H4	H5	H8	H9	H11
VPPM-6F	65,5	47,5	M12x1	6	126,9	110,4	52,8	41,3	28,3	26,3	12,2

	L1	L2	L3	L4	L5	W1 ± 5°
VPPM-6F	41,5	31,5	30,3	28,4	12,3	45°

Dimensions

Dimensions – IO-Link® interface, VPPM-6L- pneumatic connection G1/8 Download CAD data www.festo.com

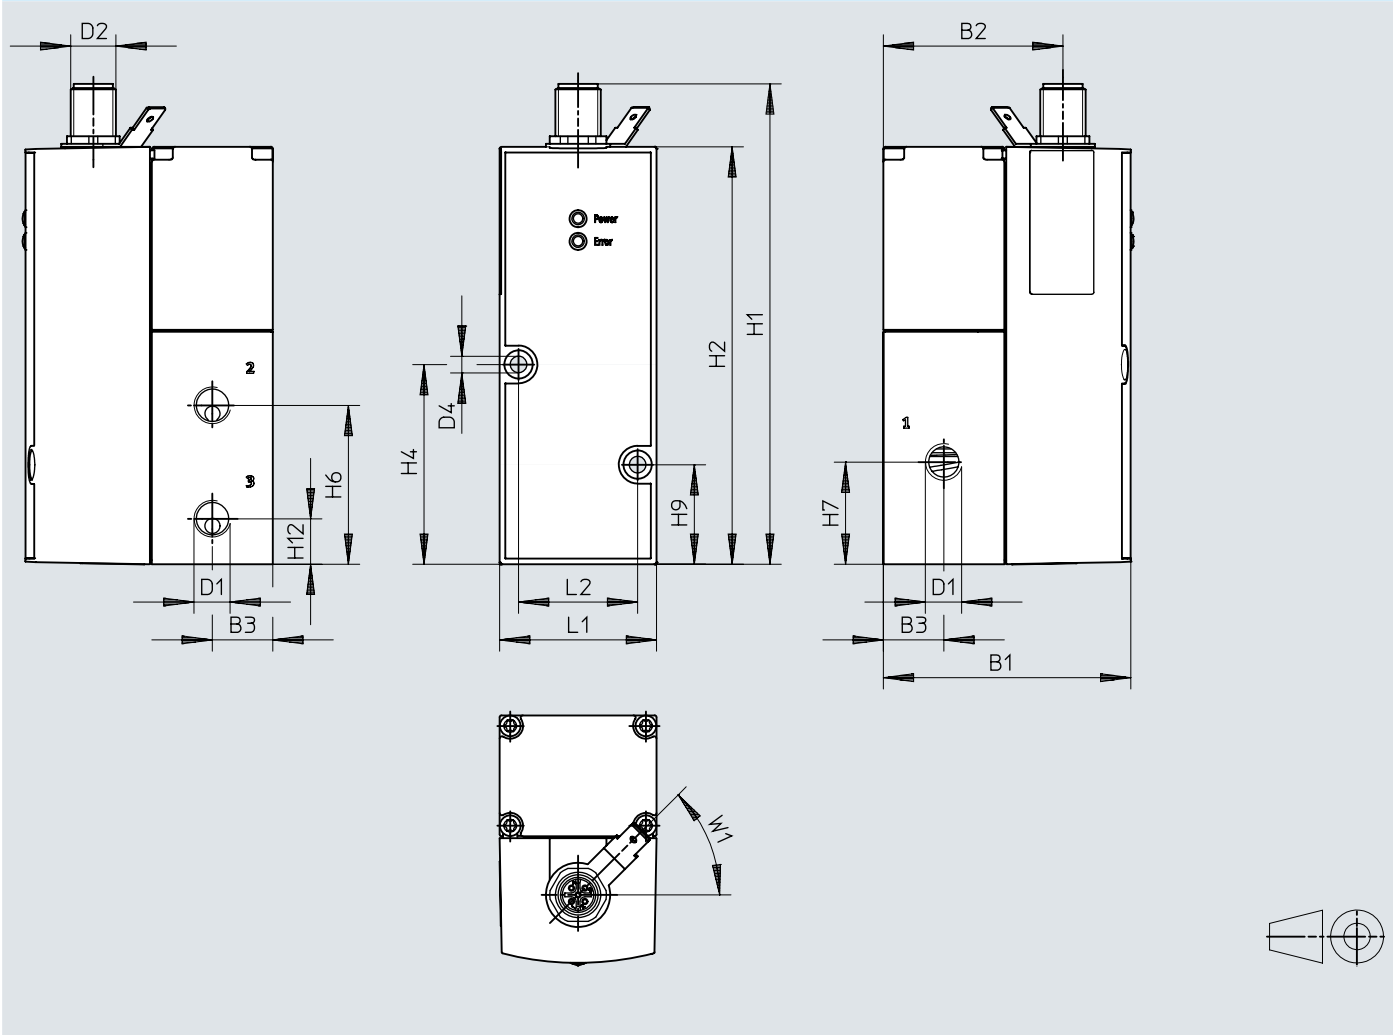


	B1	B2	B3	D1 Ø	D2 Ø	D4 Ø	H1	H2	H4	H6	H7	H9	H12
VPPM-6L	65,5	47,5	16	G1/8	M12x1	4,4	126,9	110,4	52,8	42	27	26,3	12

	L1		L2		W1 ± 5°	
VPPM-6L	41,5		31,5		45°	

Dimensions

Dimensions – IO-Link® interface, VPPM-8F, sub-base valve

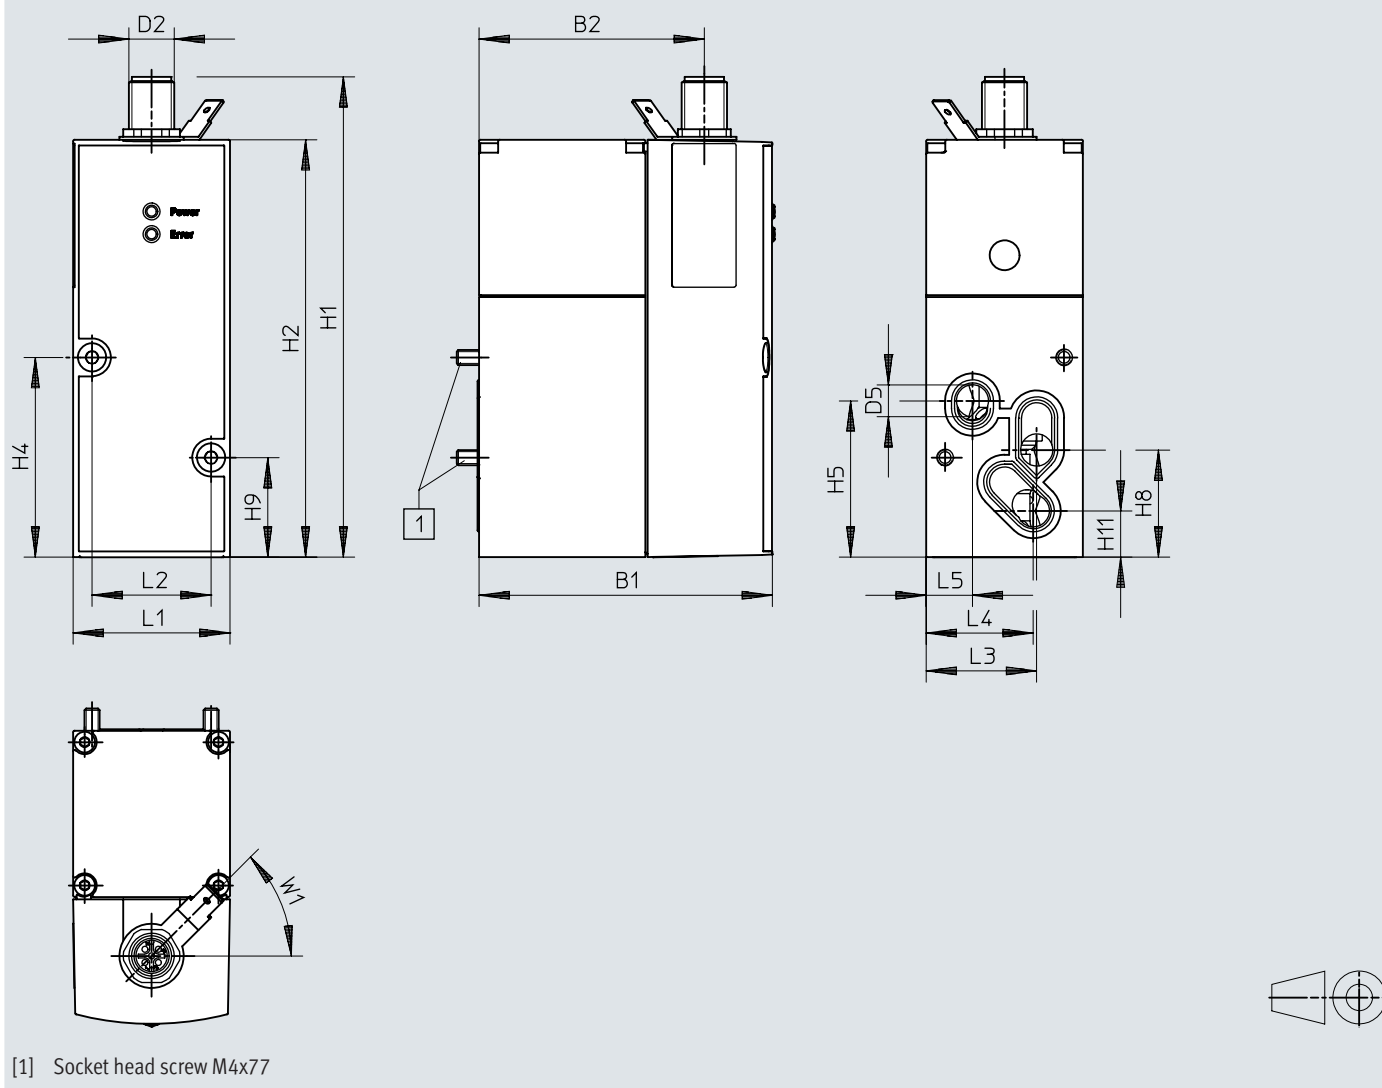Download CAD data www.festo.com


	B1	B2	D2	D5 ø	H1	H2	H4	H5	H8	H9	H11
VPPM-8L	77,4	59,5	M12x1	8	126,9	110,4	52,8	41,3	28,3	26,3	12,2

	L1	L2	L3	L4	L5	W1 ± 5°
VPPM-8L	41,5	31,5	29,3	28,4	12,3	45°

Dimensions

Dimensions – IO-Link® interface, VPPM-8L, pneumatic connection G1/4

Download CAD data www.festo.com

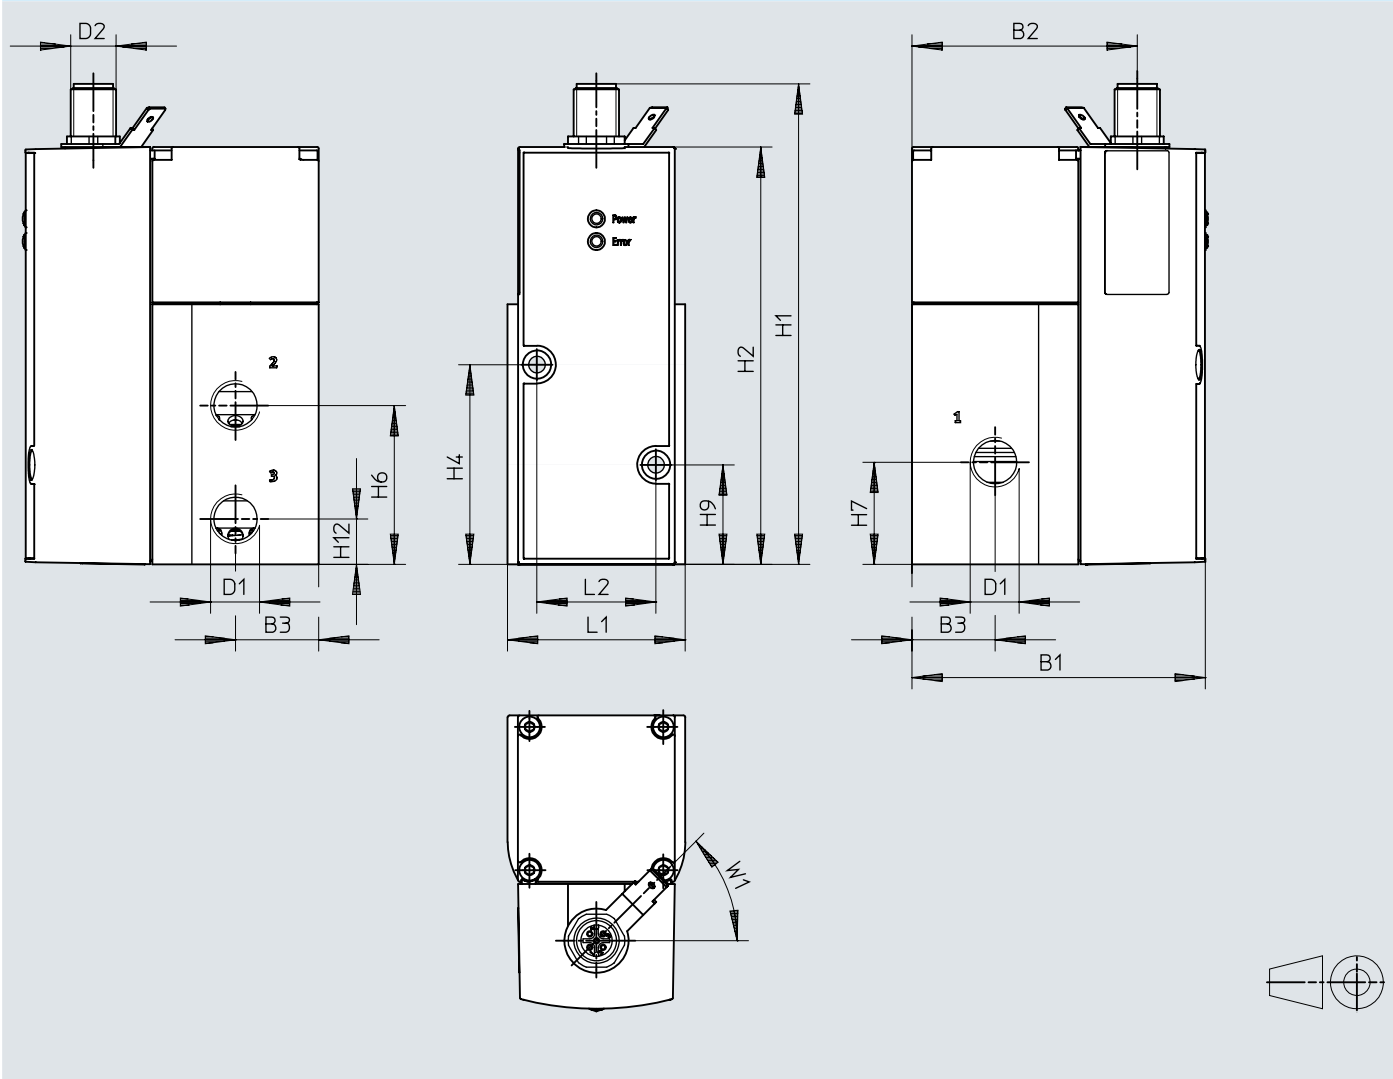


	B1	B2	B3	D1	D2	H1	H2	H4	H6	H7	H9	H12
VPPM-8L	77,4	59,5	22	G1/4	M12x1	126,9	110,4	52,8	42	27	26,3	12

	L1	L2	W1 ± 5°
VPPM-8L	47	31,5	45°

Dimensions


Dimensions – IO-Link® interface, VPPM-12L, pneumatic connection G1/2

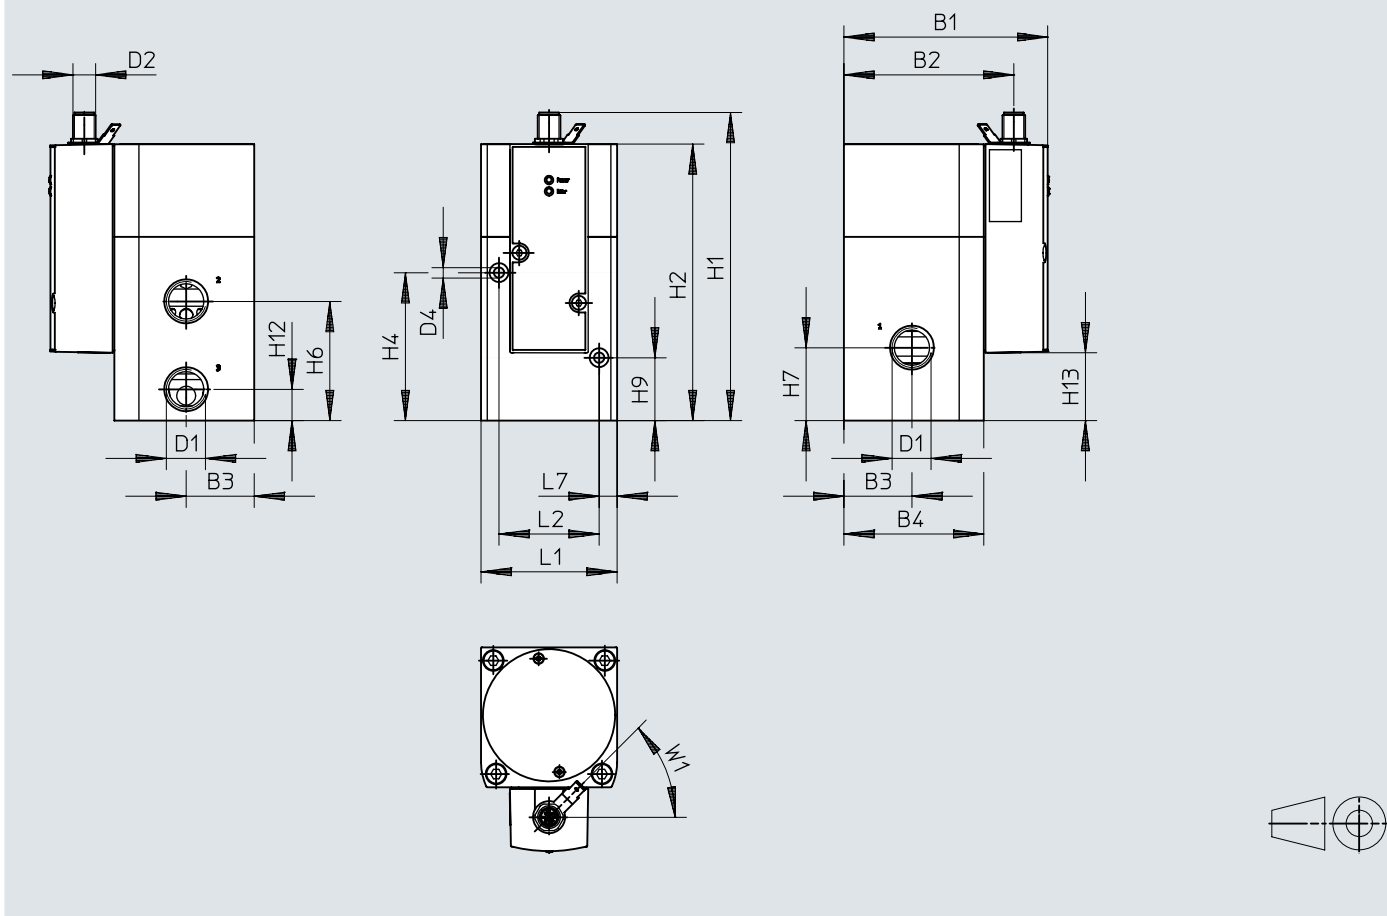Download CAD data www.festo.com

	B1	B2	B3	B4	D1	D2	D4 Ø	H1	H2	H4	H6	H7	H9	H12	H13
VPPM-12L	107,4	89,5	36	74	G1/2	M12x1	4,4	162,8	146,3	78,2	63	38,5	33,2	16,5	35,9
	L1			L2			L7			W1 ±5°					
VPPM-12L	72			53			9,5			45°					

Dimensions

Dimensions – Manifold block VABM-P1 Download CAD data www.festo.com

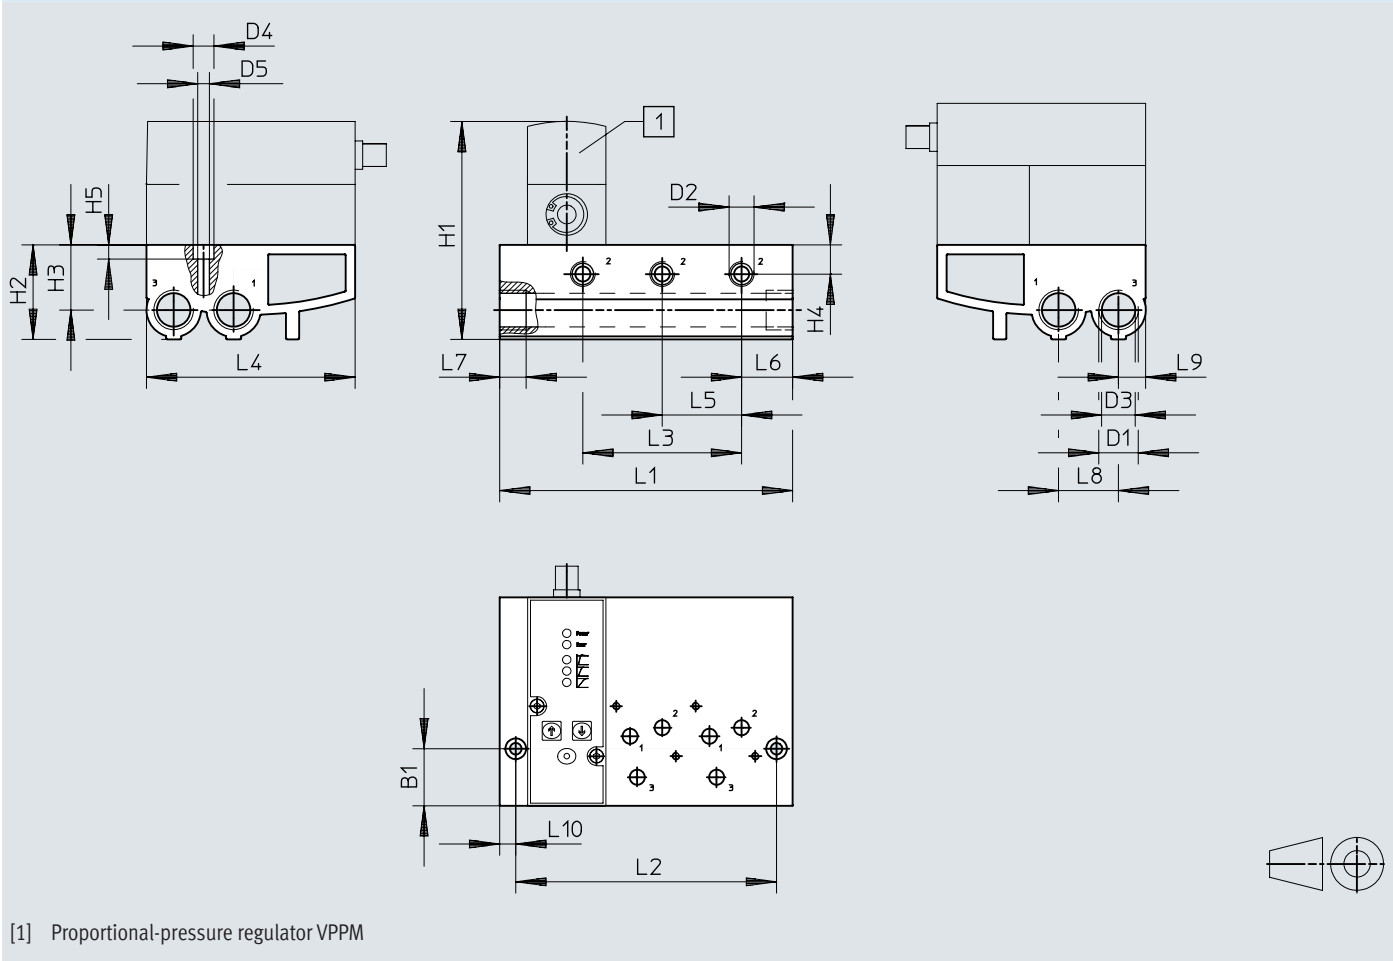


[1] Proportional-pressure regulator VPPM

	B1	D1	D2	D3 Ø	D4 Ø	D5 Ø	H1	H2	H3	H4	H5
VABM-P1-SF-G14-2-P3	30,2	G1/2	G1/4	17,8	11	6,2	~116	50	34,5	15,5	7,5
VABM-P1-SF-G14-3-P3											
VABM-P1-SF-G14-4-P3											

	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
VABM-P1-SF-G14-2-P3	113	96	42	110,4	42	27	14	31,7	14,4	8,5
VABM-P1-SF-G14-3-P3	155	138	84							
VABM-P1-SF-G14-4-P3	197	180	126							

Dimensions


Dimensions – Cover plate VABB-P1

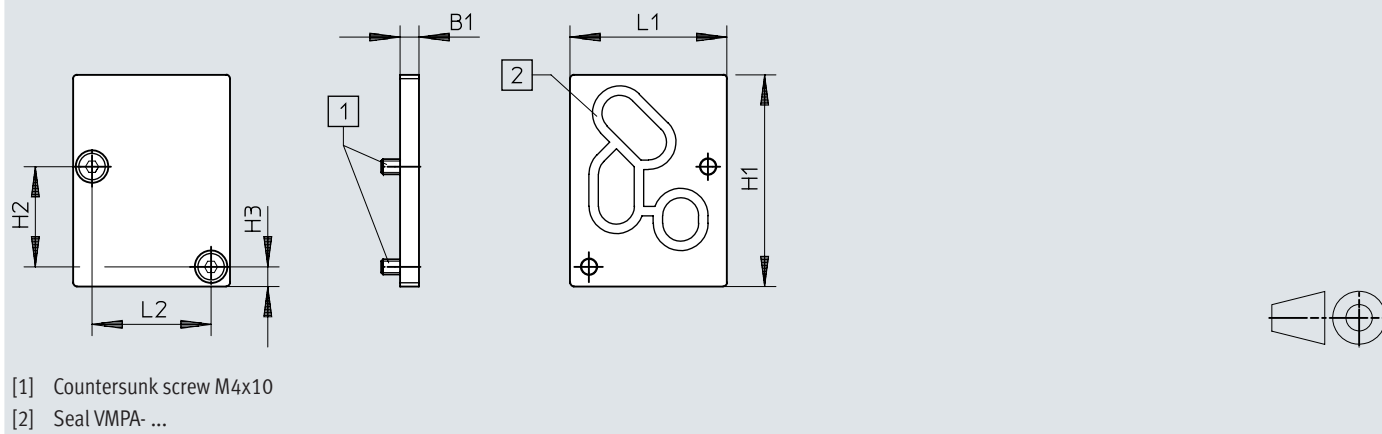[Download CAD data](http://www.festo.com)


	B1	H1	H2	H3	L1	L2
VABB-P1	5	56	26,5	5,2	41,5	31,5

Dimensions


Dimensions – Bracket VAME-P1-A Download CAD data www.festo.com

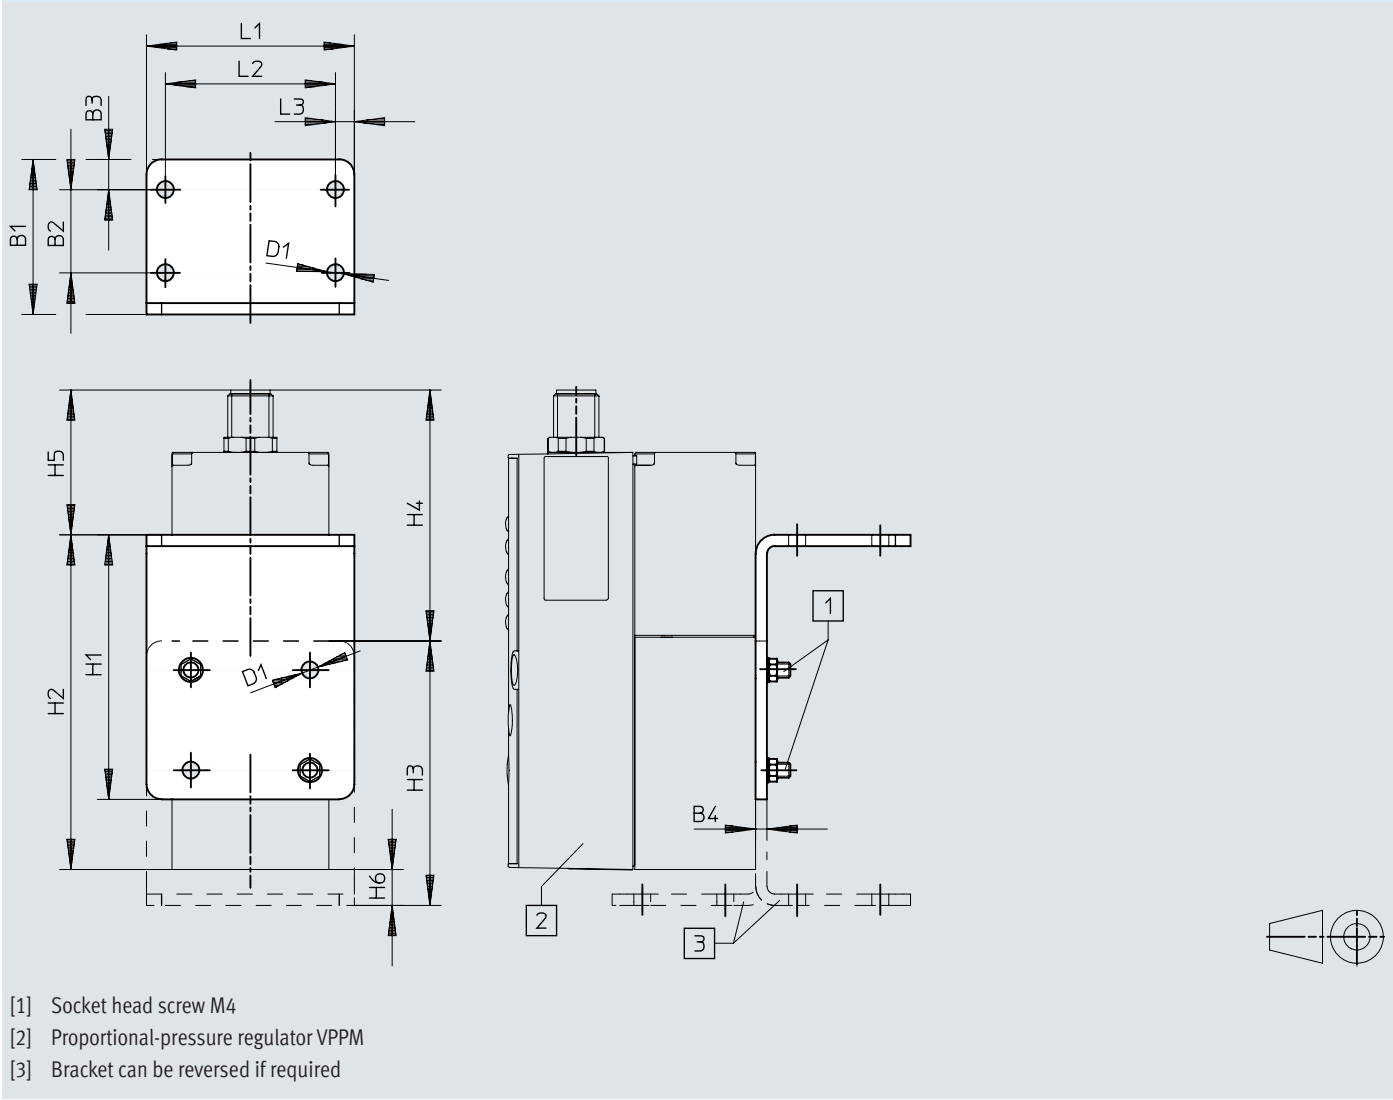

	B1	B2	B3	B4	D1 ∅	H1	H2	H3	H4	H5	H6	L1	L2	L3
VAME-P1-A	41	22	8	3	4,5	70	88,6	70	66,4	38,3	9,5	55	45	5

Dimensions

Dimensions – H-rail mounting VAME-P1-T

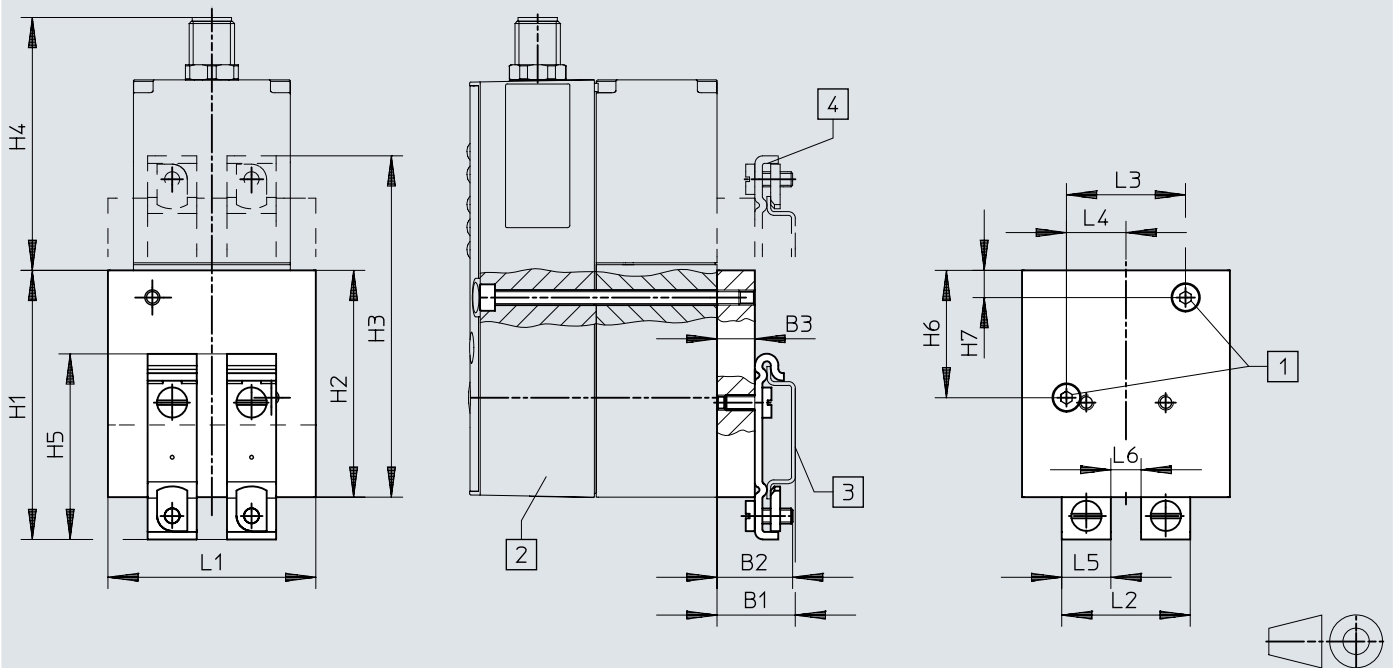
[Download CAD data](#) www.festo.com


- [1] Socket head screw M4
- [2] Proportional-pressure regulator VPPM
- [3] H-rail NRH
- [4] H-rail mounting can be rotated 180° if required

	B1	B2	B3	H1	H2	H3	H4	H5	H6	H7	L1	L2	L3	L4	L5	L6
VAME-P1-T	20,7	20	10	71,2	60	90,3	66,9	49,1	33,7	7,2	55	34	31,5	15,75	13	8

Dimensions

Dimensions – Connecting cable NEBV-M12G8-KD-3-M12G4 Download CAD data www.festo.com

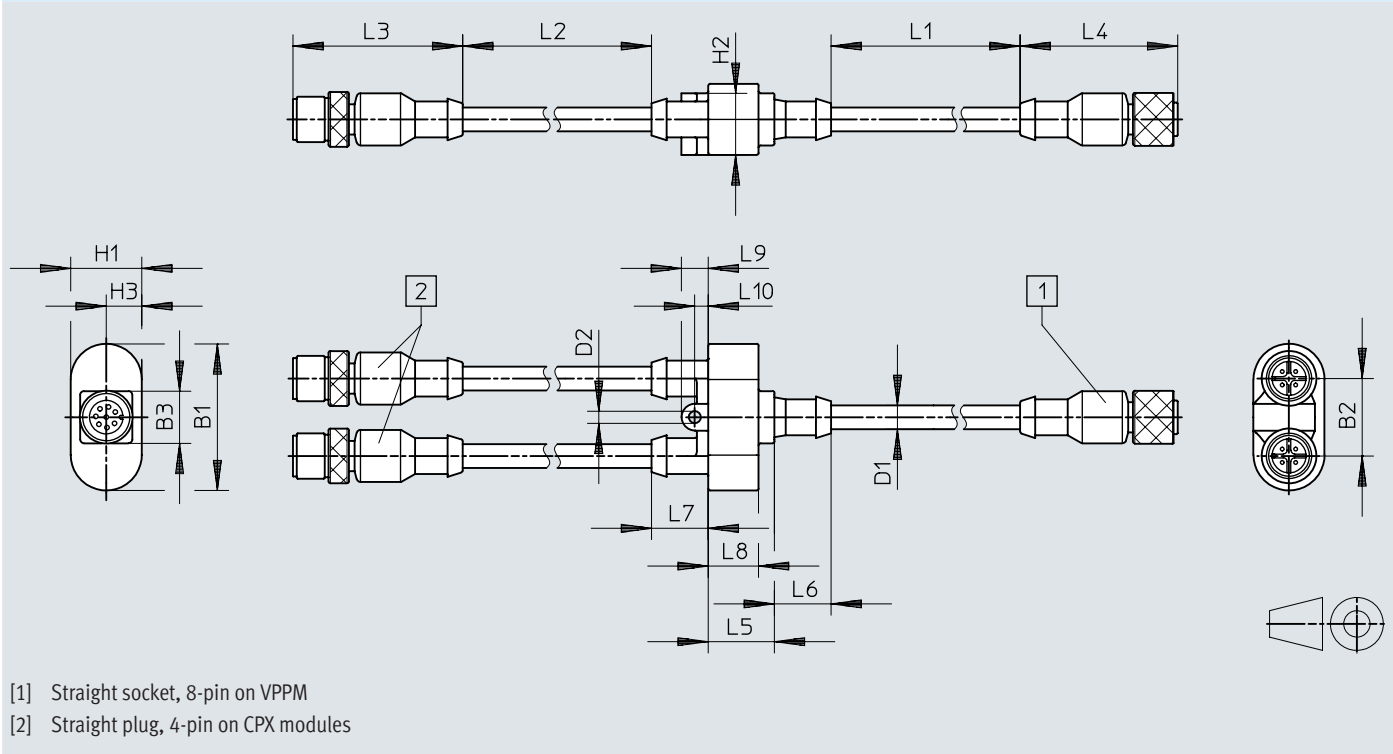


	B1	B2	B3	D1	D2	H1	H2	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
NEBV-M12G8	38,8	20,5	13,8	6,3	3,2	18,8	16,3	9,4	2500	500	44,9	41,7	17,5	15	15	13,3	7,1	3,6

Dimensions

Dimensions – Connecting cable NEBV-M12G8-K-5-M12G4

Download CAD data www.festo.com

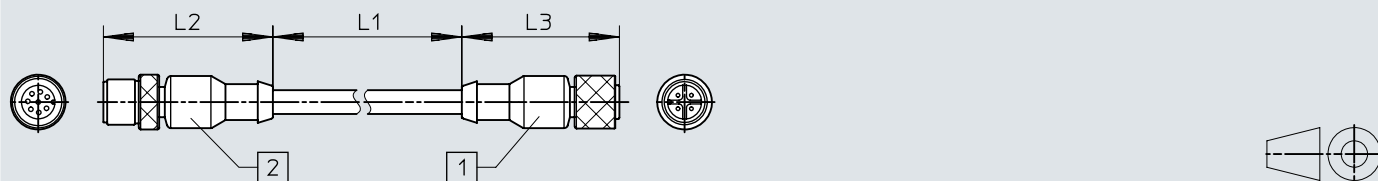

- [1] Straight plug, M12 4-pin on CPX module
 [2] Straight socket, M12 8-pin on VPPM

	L1	L2	L3
NEBV-M12G8-K-2-M12G4	2000	44,9	41,7
NEBV-M12G8-K-5-M12G4	5000	44,9	41,7

Ordering data

VPPM with analogue interface						
Signal range analogue input	Signal range analogue output	Total accuracy	Pneumatic connection, port 1	Pressure regulation range	Part no.	Type
0 - 10 V	0 - 10 V	1.25%FS	Sub-base	0.002 ... 0.2 MPa	542239	VPPM-6F-L-1-F-0L2H-V1N-S1
				0.006 ... 0.6 MPa	571286	VPPM-8F-L-1-F-0L6H-V1P-S1
					571287	VPPM-8F-L-1-F-0L6H-V1P-S1C1
					542240	VPPM-6F-L-1-F-0L6H-V1N-S1
				0.01 ... 1 MPa	542241	VPPM-6F-L-1-F-0L10H-V1N-S1
			G1/8	0.002 ... 0.2 MPa	542227	VPPM-6L-L-1-G18-0L2H-V1N-S1
				0.006 ... 0.6 MPa	542228	VPPM-6L-L-1-G18-0L6H-V1N-S1
					575121	VPPM-6L-L-1-G18-0L6H-V1P-S1C1
					554039	VPPM-6L-L-1-G18-0L6H-V1P-S1
					571448	VPPM-6L-L-1-G18-0L6H-V1N-S1C1
				0.01 ... 1 MPa	558345	VPPM-6L-L-1-G18-0L10H-V1N-S1C1
					558335	VPPM-6L-L-1-G18-0L10H-V1P-S1C1
					542229	VPPM-6L-L-1-G18-0L10H-V1N-S1
					554040	VPPM-6L-L-1-G18-0L10H-V1P-S1
			G1/4	0.006 ... 0.6 MPa	571294	VPPM-8L-L-1-G14-0L6H-V1N-S1
					571295	VPPM-8L-L-1-G14-0L6H-V1N-S1C1
					571297	VPPM-8L-L-1-G14-0L6H-V1P-S1
					571298	VPPM-8L-L-1-G14-0L6H-V1P-S1C1
				0.01 ... 1 MPa	571293	VPPM-8L-L-1-G14-0L10H-V1P-S1C1
					571291	VPPM-8L-L-1-G14-0L10H-V1N-S1
			G1/2	0.006 ... 0.6 MPa	571292	VPPM-8L-L-1-G14-0L10H-V1P-S1
					575240	VPPM-12L-L-1-G12-0L6H-V1P-S1
					575238	VPPM-12L-L-1-G12-0L6H-V1N-S1
					575241	VPPM-12L-L-1-G12-0L6H-V1P-S1C1
				0.01 ... 1 MPa	575239	VPPM-12L-L-1-G12-0L6H-V1N-S1C1
					575236	VPPM-12L-L-1-G12-0L10H-V1P-S1
					575235	VPPM-12L-L-1-G12-0L10H-V1N-S1
					575237	VPPM-12L-L-1-G12-0L10H-V1P-S1C1
		2.25%FS	Sub-base	0.002 ... 0.2 MPa	542245	VPPM-6F-L-1-F-0L2H-V1N
				0.006 ... 0.6 MPa	558339	VPPM-6F-L-1-F-0L6H-V1P-C1
					542246	VPPM-6F-L-1-F-0L6H-V1N
					571285	VPPM-8F-L-1-F-0L6H-V1P
				0.01 ... 1 MPa	558347	VPPM-6F-L-1-F-0L6H-V1N-C1
					542247	VPPM-6F-L-1-F-0L10H-V1N
			G1/8	0.002 ... 0.2 MPa	542233	VPPM-6L-L-1-G18-0L2H-V1N
				0.006 ... 0.6 MPa	554043	VPPM-6L-L-1-G18-0L6H-V1P
					558337	VPPM-6L-L-1-G18-0L6H-V1P-C1
					542234	VPPM-6L-L-1-G18-0L6H-V1N
					558346	VPPM-6L-L-1-G18-0L6H-V1N-C1
				0.01 ... 1 MPa	554044	VPPM-6L-L-1-G18-0L10H-V1P
					542235	VPPM-6L-L-1-G18-0L10H-V1N
					575125	VPPM-6L-L-1-G18-0L10H-V1P-C1
			G1/4	0.006 ... 0.6 MPa	571296	VPPM-8L-L-1-G14-0L6H-V1P
4 - 20 mA	4 - 20 mA	1.25%FS	Sub-base	0.002 ... 0.2 MPa	542242	VPPM-6F-L-1-F-0L2H-A4N-S1
				0.006 ... 0.6 MPa	542243	VPPM-6F-L-1-F-0L6H-A4N-S1
					571284	VPPM-8F-L-1-F-0L6H-A4P-S1C1
					571283	VPPM-8F-L-1-F-0L6H-A4P-S1
				0.01 ... 1 MPa	542244	VPPM-6F-L-1-F-0L10H-A4N-S1
			G1/8	0.002 ... 0.2 MPa	542230	VPPM-6L-L-1-G18-0L2H-A4N-S1
				0.006 ... 0.6 MPa	542231	VPPM-6L-L-1-G18-0L6H-A4N-S1
					575128	VPPM-6L-L-1-G18-0L6H-A4P-S1C1
					554041	VPPM-6L-L-1-G18-0L6H-A4P-S1
				0.01 ... 1 MPa	554042	VPPM-6L-L-1-G18-0L10H-A4P-S1
					542232	VPPM-6L-L-1-G18-0L10H-A4N-S1
					558336	VPPM-6L-L-1-G18-0L10H-A4P-S1C1
			G1/4	0.006 ... 0.6 MPa	571302	VPPM-8L-L-1-G14-0L6H-A4N-S1
					571303	VPPM-8L-L-1-G14-0L6H-A4N-S1C1
					571300	VPPM-8L-L-1-G14-0L6H-A4P-S1
					571301	VPPM-8L-L-1-G14-0L6H-A4P-S1C1
				0.01 ... 1 MPa	571288	VPPM-8L-L-1-G14-0L10H-A4N-S1

Ordering data

VPPM with analogue interface						
Signal range analogue input	Signal range analogue output	Total accuracy	Pneumatic connection, port 1	Pressure regulation range	Part no.	Type
4 - 20 mA	4 - 20 mA	1.25%FS	G1/4	0.01 ... 1 MPa	571289	VPPM-8L-L-1-G14-0L10H-A4P-S1
					571290	VPPM-8L-L-1-G14-0L10H-A4P-S1C1
			G1/2	0.006 ... 0.6 MPa	575243	VPPM-12L-L-1-G12-0L6H-A4P-S1C1
					575242	VPPM-12L-L-1-G12-0L6H-A4P-S1
					575244	VPPM-12L-L-1-G12-0L6H-A4N-S1
				0.01 ... 1 MPa	575245	VPPM-12L-L-1-G12-0L6H-A4N-S1C1
					575232	VPPM-12L-L-1-G12-0L10H-A4N-S1
					575234	VPPM-12L-L-1-G12-0L10H-A4P-S1C1
					575233	VPPM-12L-L-1-G12-0L10H-A4P-S1
		2.25%FS	Sub-base	0.002 ... 0.2 MPa	542248	VPPM-6F-L-1-F-0L2H-A4N
				0.006 ... 0.6 MPa	558340	VPPM-6F-L-1-F-0L6H-A4P-C1
					571282	VPPM-8F-L-1-F-0L6H-A4P
					542249	VPPM-6F-L-1-F-0L6H-A4N
				0.01 ... 1 MPa	542250	VPPM-6F-L-1-F-0L10H-A4N
			G1/8	0.002 ... 0.2 MPa	542236	VPPM-6L-L-1-G18-0L2H-A4N
					554045	VPPM-6L-L-1-G18-0L6H-A4P
				0.006 ... 0.6 MPa	542237	VPPM-6L-L-1-G18-0L6H-A4N
					558338	VPPM-6L-L-1-G18-0L6H-A4P-C1
				0.01 ... 1 MPa	542238	VPPM-6L-L-1-G18-0L10H-A4N
					554046	VPPM-6L-L-1-G18-0L10H-A4P
			G1/4	0.006 ... 0.6 MPa	571299	VPPM-8L-L-1-G14-0L6H-A4P

VPPM with analogue interface, for valve manifold					
Total accuracy	Pneumatic connection, port 1	Pressure regulation range	Part no.	Type	
1.25%FS	Sub-base	0.002 ... 0.2 MPa	572407	VPPM-8TA-L-1-F-0L2H-S1C1	
			542217	VPPM-6TA-L-1-F-0L2H-S1	
		0.006 ... 0.6 MPa	542218	VPPM-6TA-L-1-F-0L6H-S1	
			572408	VPPM-8TA-L-1-F-0L6H-S1C1	
		0.01 ... 1 MPa	542219	VPPM-6TA-L-1-F-0L10H-S1	
			572409	VPPM-8TA-L-1-F-0L10H-S1C1	
2.25%FS	Sub-base	0.002 ... 0.2 MPa	542220	VPPM-6TA-L-1-F-0L2H	
			572410	VPPM-8TA-L-1-F-0L2H-C1	
		0.006 ... 0.6 MPa	572411	VPPM-8TA-L-1-F-0L6H-C1	
			542221	VPPM-6TA-L-1-F-0L6H	
		0.01 ... 1 MPa	572412	VPPM-8TA-L-1-F-0L10H-C1	
			542222	VPPM-6TA-L-1-F-0L10H	


VPPM with IO-Link® interface				
Total accuracy	Pneumatic connection, port 1	Pressure regulation range	Part no.	Type
1.25%FS	Sub-base	0.002 ... 0.2 MPa	8031107	VPPM-6F-L-1-F-0L2H-LK-S1
			8031110	VPPM-8F-L-1-F-0L2H-LK-S1
		0.006 ... 0.6 MPa	8031111	VPPM-8F-L-1-F-0L6H-LK-S1
			8031108	VPPM-6F-L-1-F-0L6H-LK-S1
		0.01 ... 1 MPa	8031112	VPPM-8F-L-1-F-0L10H-LK-S1
			8031109	VPPM-6F-L-1-F-0L10H-LK-S1
	G1/8	0.002 ... 0.2 MPa	8024258	VPPM-6L-L-1-G18-0L2H-LK-S1
		0.006 ... 0.6 MPa	8024259	VPPM-6L-L-1-G18-0L6H-LK-S1
		0.01 ... 1 MPa	8024260	VPPM-6L-L-1-G18-0L10H-LK-S1
	G1/4	0.002 ... 0.2 MPa	8024261	VPPM-8L-L-1-G14-0L2H-LK-S1
		0.006 ... 0.6 MPa	8024262	VPPM-8L-L-1-G14-0L6H-LK-S1
		0.01 ... 1 MPa	8024263	VPPM-8L-L-1-G14-0L10H-LK-S1
	G1/2	0.002 ... 0.2 MPa	8024264	VPPM-12L-L-1-G12-0L2H-LK-S1
		0.006 ... 0.6 MPa	8024265	VPPM-12L-L-1-G12-0L6H-LK-S1
		0.01 ... 1 MPa	8024266	VPPM-12L-L-1-G12-0L10H-LK-S1

Ordering data

Modular product system			
	Nominal size, supply	Part no.	Type
	6 mm	543432	VPPM-6-...
	8 mm	543433	VPPM-8
	12 mm	543435	VPPM-12

Peripherals

Individual valve VPPM-6L..., VPPM-8L...

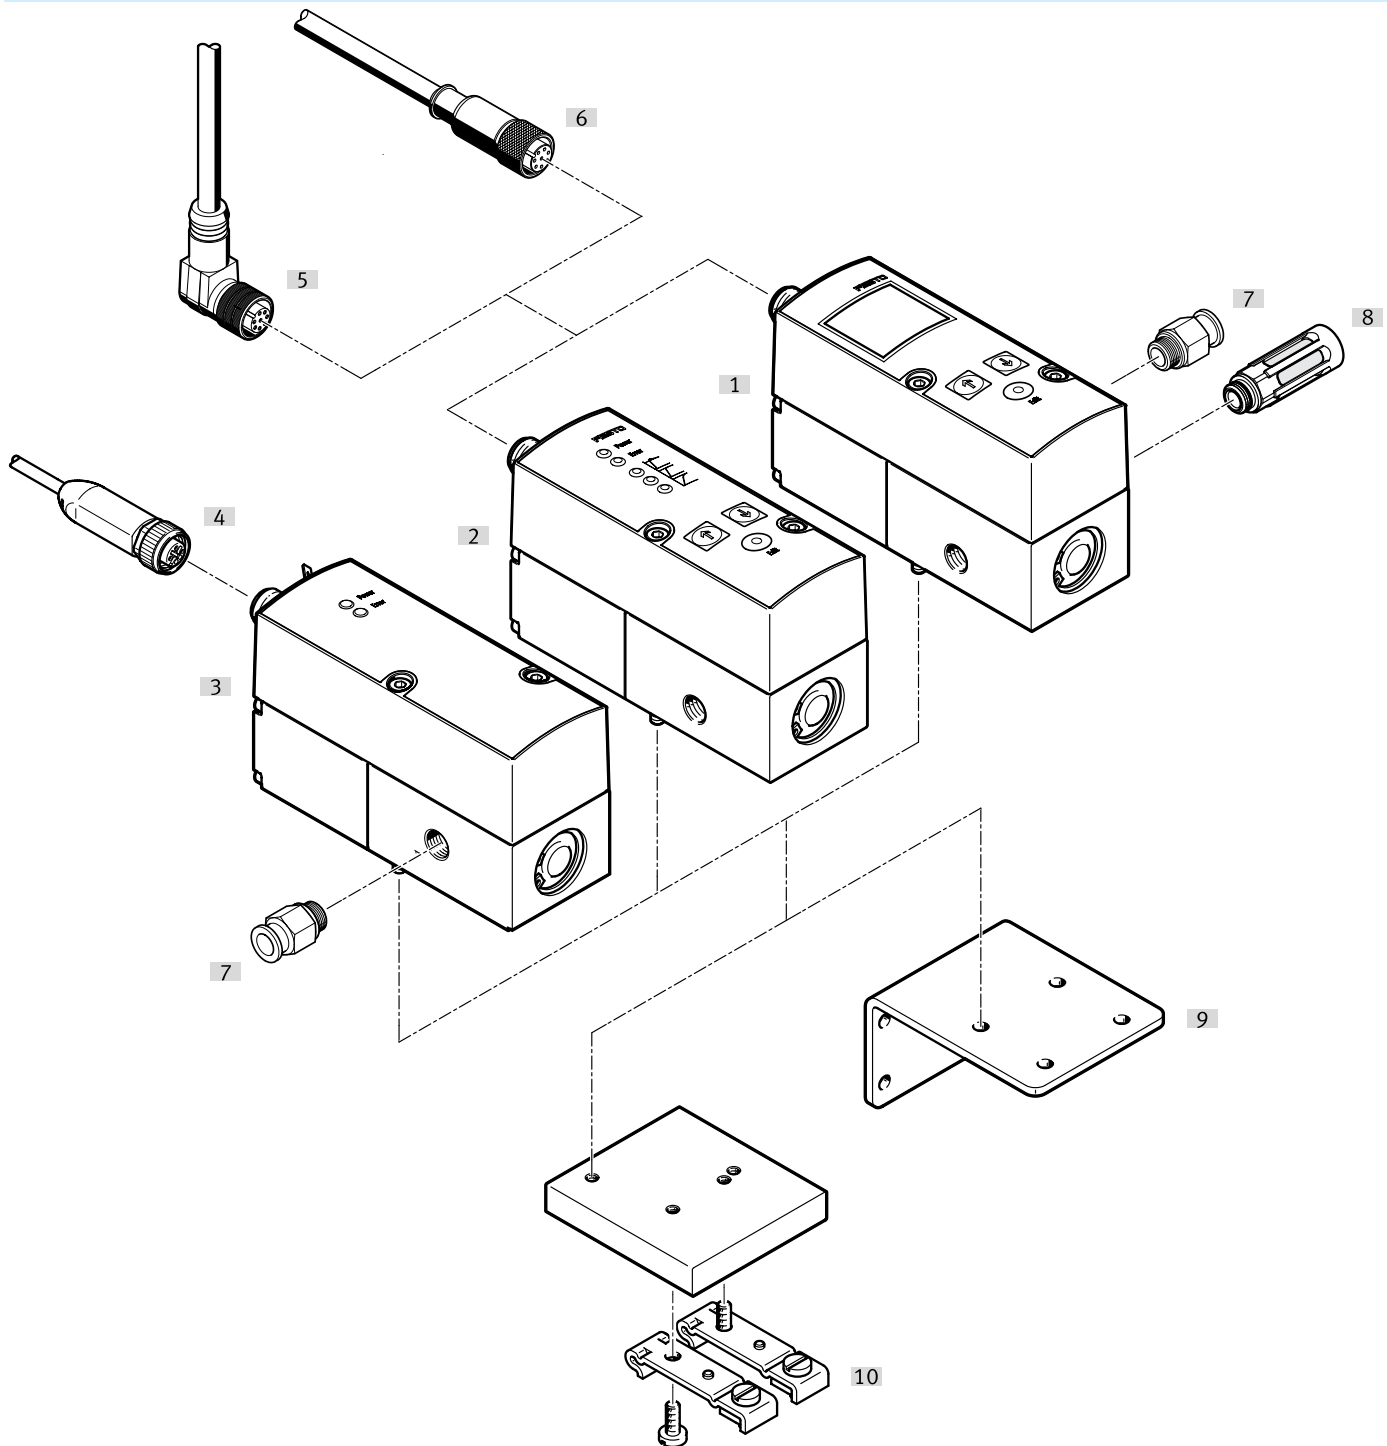


Accessories			→ Link
Type/order code	Description		
[1]	Proportional-pressure regulator with LCD	Operator unit with LCD	↗ -
[2]	Proportional-pressure regulator with LED	Operator unit with LED	↗ -
[3]	Proportional-pressure regulator with LED, with IO-Link®	Operator unit with LED, IO-Link®	↗ -
[4]	Connecting cable	-	44
[5]	Angled plug socket with cable	-	
[6]	Plug socket with cable, straight	-	43
[7]	Push-in fitting	For connecting tubing with standard O.D.	↗ qs
[8]	Silencer	For mounting in exhaust ports	↗ u

Peripherals

Accessories		→ Link
Type/order code	Description	
[9] Bracket	For mounting the valve	43
[10] H-rail mounting	For mounting on an H-rail	43

Peripherals


Individual valve VPPM-12L...

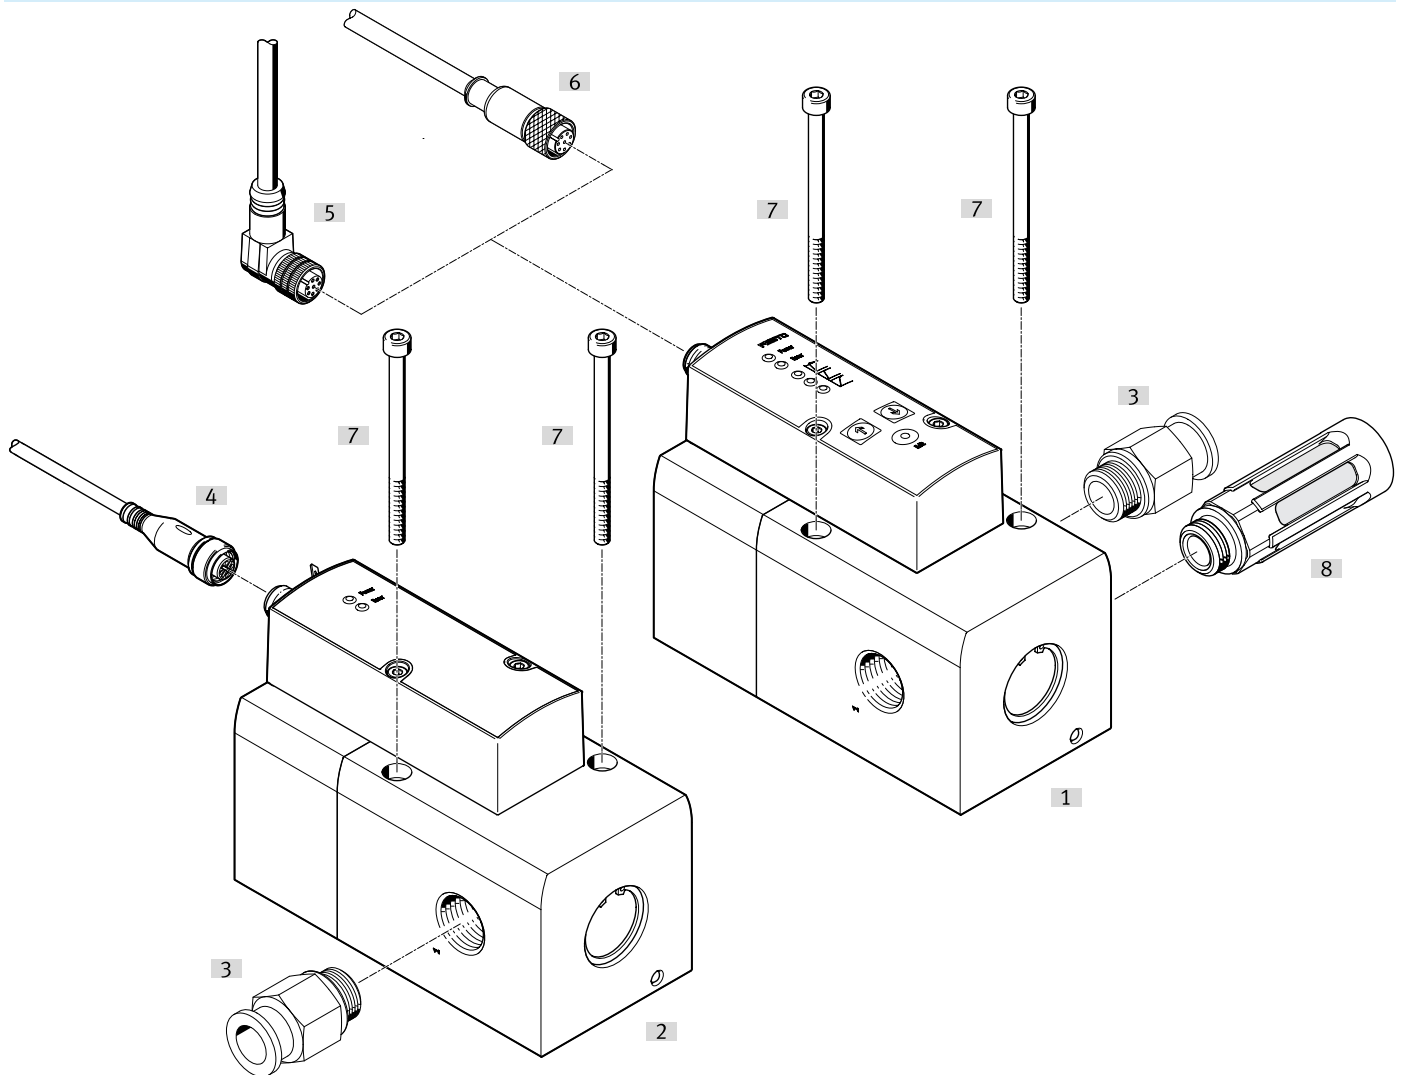

Accessories			→ Link
Type/order code	Description		
[1]	Proportional-pressure regulator with LED or LCD	Operator unit with LED or LCD	–
[2]	Proportional-pressure regulator with LED, with IO-Link®	Operator unit with LED, IO-Link®	–
[3]	Push-in fitting	For connecting tubing with standard O.D.	qs
[4]	Connecting cable	–	44
[5]	Angled plug socket with cable	–	
[6]	Plug socket with cable, straight	–	43
[7]	Retaining screws	–	–
[8]	Silencer	For mounting in exhaust ports	u

Peripherals

Valve manifold assembly with VPPM-6F..., VPPM-8F...

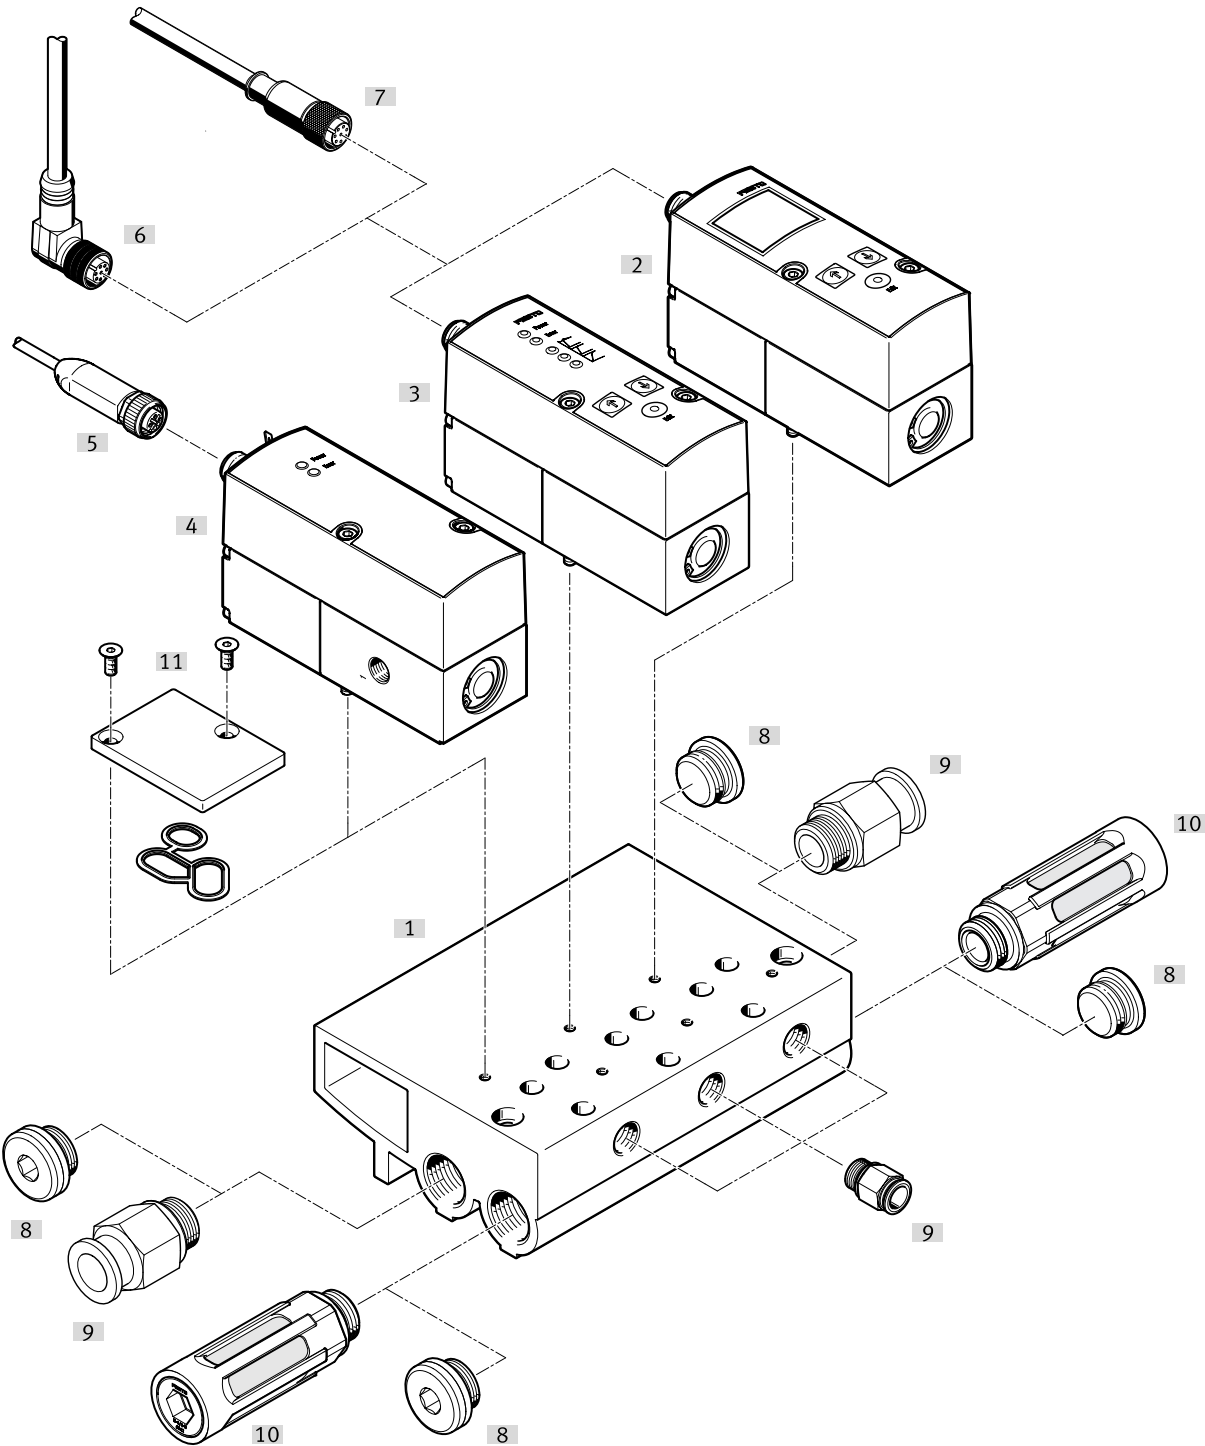


Accessories		→ Link
Type/order code	Description	
[1] Manifold block VABM	–	43
[2] Proportional-pressure regulator with LCD	Operator unit with LCD	b –
[3] Proportional-pressure regulator with LED	Operator unit with LED	b –
[4] Proportional-pressure regulator with LED, with IO-Link®	Operator unit with LED, IO-Link®	b –
[5] Connecting cable	–	44
[6] Angled plug socket with cable	–	
[7] Plug socket with cable, straight	–	43
[8] Blanking plug	–	b

Peripherals

Accessories		→ Link
Type/order code	Description	
[9] Push-in fitting	For connecting tubing with standard O.D.	qs
[10] Silencer	For mounting in exhaust ports	u
[11] Cover plate	For vacant position, seal and countersunk screws are included in the scope of delivery	43


Peripherals

VPPM-6TA..., VPPM-8TA... for valve terminal MPA-S

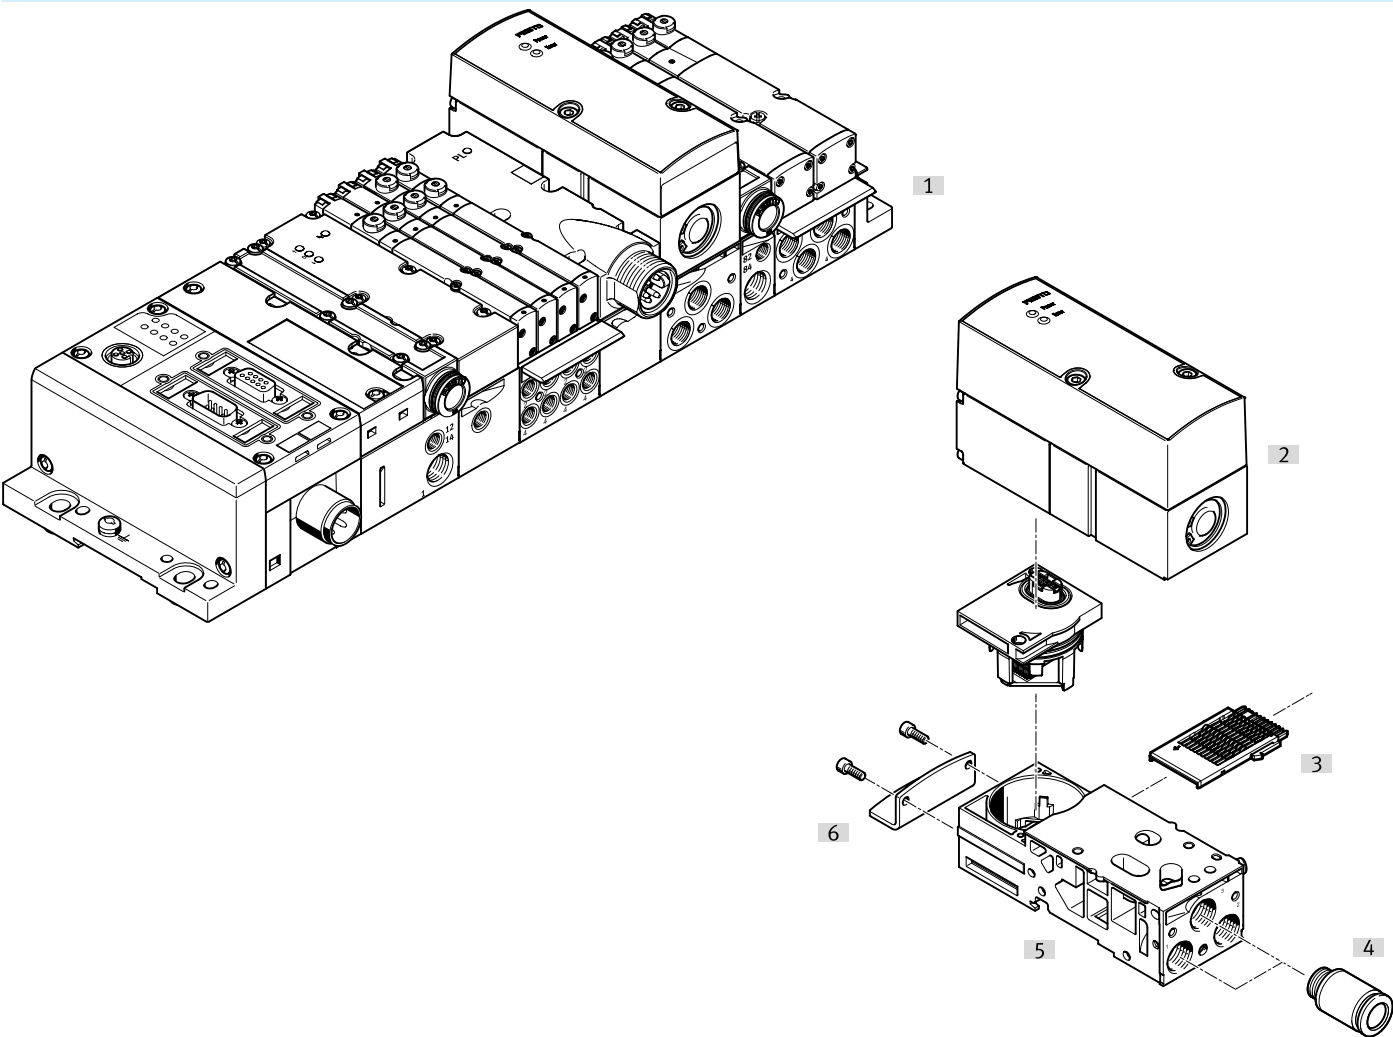


Accessories			→ Link
Type/order code	Description		
[1]	Valve terminal MPA-S	With fieldbus connection and VPPM	mpas
[2]	Proportional pressure regulator	For valve terminal MPA-S	mpas
[3]	Electrical interlinking module	For the sub-base of the proportional-pressure regulator	mpas
[4]	Push-in fitting	–	qs
[5]	Sub-base	Without electrical linking module or electrical module	mpas
[6]	Mounting	–	mpas

Accessories

Manifold block					
	Product weight	Corrosion resistance class CRC ¹⁾	Part no.	Type	
	900 g	2 - Moderate corrosion stress	542252	VABM-P1-SF-G14-2-P3	
	1,230 g		542253	VABM-P1-SF-G14-3-P3	
	1,565 g		542254	VABM-P1-SF-G14-4-P3	


1) More information www.festo.com/x/topic/crc

Cover plate					
	Product weight	Corrosion resistance class CRC ¹⁾	Part no.	Type	
	35 g	1 - Low corrosion stress	558350	VABB-P1	

1) More information www.festo.com/x/topic/crc

Bracket					
	Product weight	Corrosion resistance class CRC ¹⁾	Part no.	Type	
	71 g	1 - Low corrosion stress	542251	VAME-P1-A	

1) More information www.festo.com/x/topic/crc

H-rail mounting					
	Product weight	Corrosion resistance class CRC ¹⁾	Part no.	Type	
	150 g	1 - Low corrosion stress	542255	VAME-P1-T	

1) More information www.festo.com/x/topic/crc

Connecting cable, straight socket						
	Electrical connection 1, connection type	Electrical connection 1, number of connections/cores	Electrical connection 1, connector system	Cable length	Part no.	Type
	Socket	8	M12x1, A-coded to EN 61076-2-101	2 m	525616	SIM-M12-8GD-2-PU
				5 m	525618	SIM-M12-8GD-5-PU
				10 m	570008	SIM-M12-8GD-10-PU

Connecting cable, one straight socket and one straight plug						
	Electrical connection 1, connection type	Electrical connection 1, number of connections/cores	Electrical connection 1, connector system	Cable length	Part no.	Type
	Socket	8	M12x1, A-coded to EN 61076-2-101	2 m	553575	NEBV-M12G8-K-2-M12G4
				5 m	553576	NEBV-M12G8-K-5-M12G4

Accessories

Connecting cable, one straight socket and two straight plugs						
	Electrical connection 1, connection type	Electrical connection 1, cable outlet	Electrical connection 1, number of connections/cores	Electrical connection 1, connector system	Part no.	Type
	Socket	Straight	8	M12x1, A-coded to EN 61076-2-101	547888	NEBV-M12G8-KD-3-M12G4

Connecting cable for IO-Link® interface						
	Electrical connection 1, connection type	Electrical connection 1, number of connections/cores	Electrical connection 1, connector system	Cable length	Part no.	Type
	Socket	5	M12x1, A-coded to EN 61076-2-101	5 m	574321	NEBU-M12G5-E-5-Q8N-M12G5
				7.5 m	574322	NEBU-M12G5-E-7.5-Q8N-M12G5
				10 m	574323	NEBU-M12G5-E-10-Q8N-M12G5