



# Vacuum filter ESF-4B

Part number: 191204

FESTO

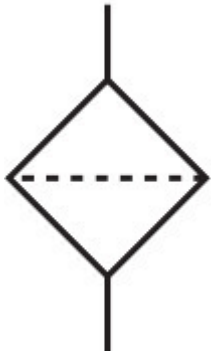

## Data sheet

 [General operating condition](#)

| Feature   | Value  |
|---|--|
| Mounting position   | optional   |
| Grade of filtration   | 10 µm  |
| Symbol  | 00991483   |
| Operating pressure  | -0.95 bar ... 4 bar                              |
| Flow rate with vacuum = -0.075 MPa (-0.75 bar, -10.875 psi) | 270 l/min  |
| Operating medium  | Atmospheric air based on ISO 8573-1:2010 [7:-:-] |
| Corrosion resistance class CRC                              | 1 - Low corrosion stress                         |
| LABS (PWIS) conformity                                      | VDMA24364-A1-L                                   |
| Ambient temperature   | 0 °C ... 60 °C                                   |
| Product weight  | 19 g   |
| Type of mounting  | Via male thread<br>Via vacuum port               |
| Pneumatic connection  | M6   |
| Vacuum connection   | M6   |
| Note on materials   | RoHS-compliant                                   |
| Material seals  | NBR  |
| Material filter   | PVF  |
| Material housing  | Aluminium<br>Brass, nickel-plated                |